

220/PF 600F-800F



FIXED BOLLARDS WITH BRACKETS TO BE ANCHORED IN GROUND

The fixed 220/PF 600F and 220/PF 800F have been designed and built with architectural appearance similar to that of the retractable bollards and therefore also allows the combined use of both versions. Current models are the result of our 40 years' experience in the security field and in excess of 20 years in the specific design and manufacture of bollards.

GENERAL FEATURES

The fixed bollards are used in public or private areas in order to define or prevent the parking of vehicles, for preventing access to vehicles in pedestrian areas. These items can be cemented to the ground, the breakout resistance depends on the depth to which it is anchored into the ground.



PAG.1/2

PILOMAT
HÖRMANN
100% MADE IN ITALY

PILOMAT s.r.l.
www.pilomat.com / pilomat@pilomat.com
Via Zanica 17/p, 24050, Grassobbio (BG) Italy
Tel. +39.035.29.72.20
Copyright 2024© Pilomat S.r.l. All rights reserved

REVIEW 21/10/2024

Information in this document is for reference only. In pursuit of its policy of continuous refinement and improvement, Pilomat reserves the right to amend this information at any time and without prior notice.
Picture shown is for illustration purpose only.

220/PF 600F-800F



AVAILABLE ITEMS

BOLLARD 220/PF FEV - NORMAL STEEL PAINTED

BOLLARD 220/PF IXV - STAINLESS STEEL PAINTED

BOLLARD 220/PF IXS - STAINLESS STEEL BRUSHED



HEAD WITHOUT LOGO FOR 220/PF

MULTILED LIGHTING STRIP - 8 LED POINTS


LIGHTING STRIP POWER CIRCUIT FOR FIXED BOLLARDS (MAX. 8 BOLLARDS)

REFLECTING ADHESIVE STRIP - WHITE (NO-LOGO)

PAINTING WITH RAL COLOUR ON REQUEST



	220/PF-600F	220/PF-800F
CYLINDER MATERIAL	S235JR NORMAL STEEL - X5CrNi 18-10 (AISI 304) STAINLESS STEEL	
CYLINDER DIAMETER	220mm	
CYLINDER HEIGHT	600mm	800mm
CYLINDER NORMAL THICKNESS	4mm	
CYLINDER NORMAL STEEL FINISH	ANTI-CORROSION TREATMENT - STANDARD PAINTING GREY ANTHRACITE	
CYLINDER STAINLESS STEEL FINISH	GREY ANTHRACITE STANDARD PAINTING OR BRUSHING	
REFLECTING ADHESIVE STRIP	STANDARD - HEIGHT 55MM	
PROTECTION CLASS	IP67	
IMPACT RESISTANCE (WITHOUT DEFORMATION)	30.000 J	
BREAKOUT RESISTANCE	150.000 J	
BRACKETS TO WALL	STANDARD - N. 4 BRACKETS	
CONNECTION LINE FOR LIGHTING STRIP (OPTIONAL)	STANDARD 10M (MAX. LENGTH 80M)	

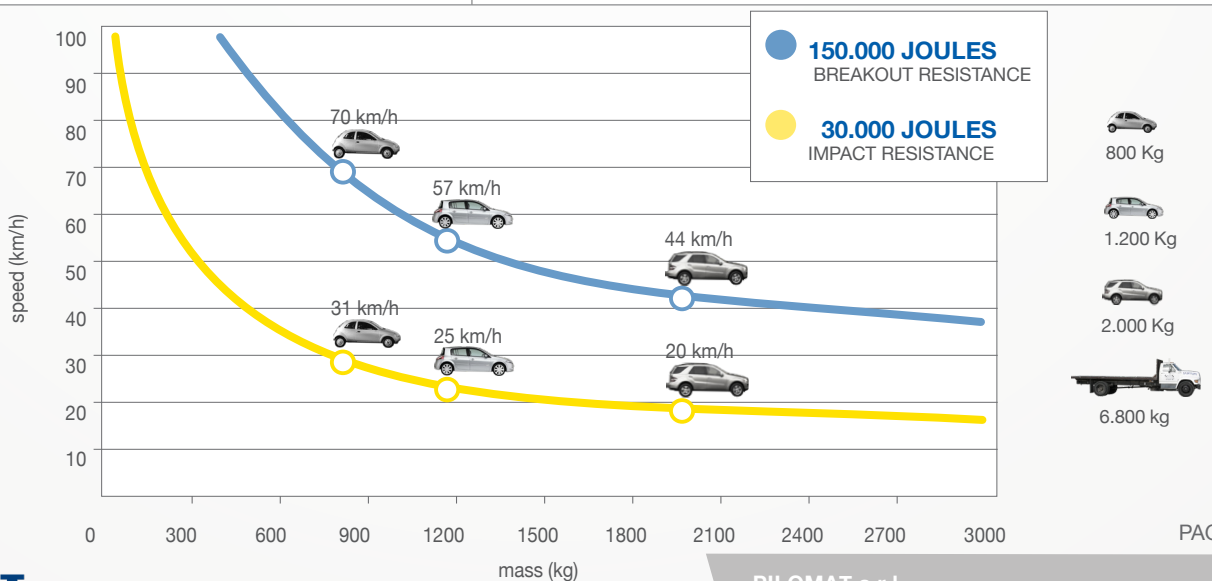

PAG.2/2

PILOMAT
HÖRMANN
100% MADE IN ITALY

PILOMAT s.r.l.
www.pilomat.com / pilomat@pilomat.com
Via Zanica 17/p, 24050, Grassobbio (BG) Italy
Tel. +39.035.29.72.20
Copyright 2024© Pilomat S.r.l. All rights reserved

REVIEW 21/10/2024

Information in this document is for reference only. In pursuit of its policy of continuous refinement and improvement, Pilomat reserves the right to amend this information at any time and without prior notice. Picture shown is for illustration purpose only.