Interactive PDF

Navigate comfortably and efficiently through our product catalogue!

This is how it works:

You select by one click in our table of contents and you will be guided to it immediately.

To make your journey through our product range as easy as possible, each category window is linked at the edges of the page.

This means that you always have individual access to the different categories at any time.

In addition, the buttons that you can find in the headline give you immediate access to our table of Content or lead you to your previous page

You are interested in one of our articles would like to order it, need further information, data sheets or installation recommendations?

No problem! You simply click on the picture and you will be immediately redirected to our website and the corresponding article.



JRBAN EQUIPMENT

stop •save •secure



The Schake company

What started as a craft business in Wetter Volmarstein in 1908 has now grown into a modern industrial company in Germany. In between lies an eventful history of the family business spanning over 115 years and several generations. Through many political and economic upheavals, strong boom times and a pandemic, the company has been managed in the spirit of progress and progressive modern development over the years.

From the forging of horseshoes and carriages, to crafting individual railings - to the series production of the first Construction and Urban Equipment with stylish design for the modern municipality - Schake is a global player, a companion of industrialization. The Schake brand is not just technology, many products or service - it is above all hundreds of employees with different life situations and many cultures - despite all our differences, one thing unites us: We are a Team.

Our path into the future

You've probably heard that nothing is more constant than change. Some business areas become less important, other areas become more important. That's why Schake is always in tune with the times. As the saying goes: when the iron is hot, it must be forged.

- · Schake invests in modern machine technology to concentrate on Made in Germany -
- · Schake gives great importance to its own expertise within the company
- · The feeling of security and appreciation of employees
- · For Schake, good performance means speed, flexibility and effectiveness
- · Schake focuses on growth through strong business partners and interesting product ranges
- · Digital connectivity paired with personalized advice leads to true excellence

Sincere thanks

We would like to thank our employees and all our business partners with whom we are able to share our achievements.

We wish all our business partners much pleasure in choosing our products.

Gerald Schake

Ralf Schake

Patrick Schake

Marc Schake

Alois Schake

Stainless steel

Barrier gates



Intro

Island post

Schake Company **Customized Color Design** Our Quality Standard

02 - 08 03

80

64

99 - 110

06 - 07

Interactive catalogues:

Quick access to the digital catalogue enables a fast search for the desired items. Simply scan the QR code in the catalogue or visit www.schake.com!



Barrier posts 09 - 64

Barrier posts / Protection for charging station 10 - 46 Chain posts 47 48 - 49 Black-Line 50 - 51 Configurable barrier posts Flexible plastic posts 52 - 54 Chains + Accessories 55 - 62 63 Class of reflection

Barrier elements 111 - 144 Tubular hoops 112 - 119 120 - 121 Protection for charging station 122 - 125 Access barriers Height restriction barriers 126 - 130 Mobile manual barrier 131 Mobile access control 132 133 - 139 Protective railing



65 - 76 Car-park barriers

Car-park barriers 66 - 73 74 Holding device for parking signage Park and guide barrier 75 Recycling bollards 76

Barrier gates

Turnstiles and Doors

City fence / railing

Swing barriers Access barriers Manual barriers Compact hand barrier

145 - 156

140 - 141

142 - 144

146 - 149.156 150 - 151 152 - 153 154 - 155



Ornamental bollards 77 - 98

Ornamental bollards made of 80 - 91 steel tube Ø 60 - 193 mm Aluminium bollards 92 - 95 Ornamental bollards of square tube 96 - 98

Outdoor equipment

Scooter racks Bicycle stands / Park Bench / Lean-on hoops **Bollard luminaires** Laundry drying stands Litter bins **Planters**

157 - 184





Stainless steel

100 - 103 Stainless steel barrier posts Stainless steel bollards 104 - 105 106 - 108 Stainless steel hoops Corten steel bollards 109 Lean-on hoops made of corten steel 110

Work site protection

Barrier posts Chain posts / accessories Protective hoops Protective railings Crash guards Warning and protection profiles



213 - 216

217



• = Stock items

Outro

Point of sale Index Individual design products 218 - 219 220 - 221 222

218 - 223



Work site protection

Unlimited possibilities – you choose, we deliver!

Our barrier posts, barrier brackets, and path barriers come standard with a white coating and red reflective stripes of class RA1/A. Give your trusted barriers a fresh new look.

Whether subtle colors for seamless integration or striking signal colors for maximum visibility - the choice is yours!

Your Options:


Free color selection – Choose from the entire RAL color spectrum

Reflection classes – For optimal visibility day and night (see page 67)

Reflective films - Also available in the full RAL color spectrum

Custom design - Perfectly tailored to your requirements

Let your creativity run free – we bring your color choices to life.

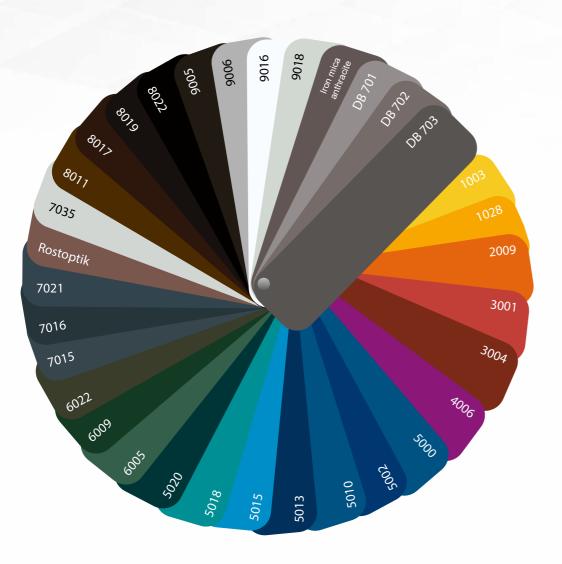

Additionally, we offer an impact-resistant anti-graffiti coating upon request. This is also available on demand.

How to configure your barriers in just 3 steps.

Step 1: Choose the base color

Decide between various gloss or matte finishes in standard RAL colors. (Standard: e.g., white RAL 9016)

Color code: A one-time surcharge applies for the color change

Base color smooth silk gloss

Base color matte fine texture

-RAL7016FS

DAI 0005ES

Step 2: Select the color of the reflective stripes

Choose red, white, or yellow for optimal signaling effect.

(Standard: e.g., 3 red reflective stripes)

Color code:

for three films in red, white, or yellow

Color code:

for one film in red and white

-RW

Step 3: Define the reflection class

Choose between RA1/A, RA2/B, or RA2/C for the desired light reflection and safety.

Reflection code: Reflection class RA1/A, RA2/B or RA2/C







Surcharge for stripe upgrade:

*for products without integrated stripes

Upgrade to Upgrade to Upgrade to

*for products with pre-existing stripes of type RA1/A


grade to \1/A pgrade to A2/B Jpgrade to

Your selected final product as an example:


Step 3 Step 1 Step 2 base article base color film color reflection class 470FB **DB703** yellow RA2/C part no. color code film color reflection code final product 2C 470FB-DB703-Y2C 470FB -DB703 -Y

Our quality standard

Our barriers stand for durability, safety, and the highest manufacturing quality. By using robust materials and innovative technologies, we provide you with products that meet the highest standards.

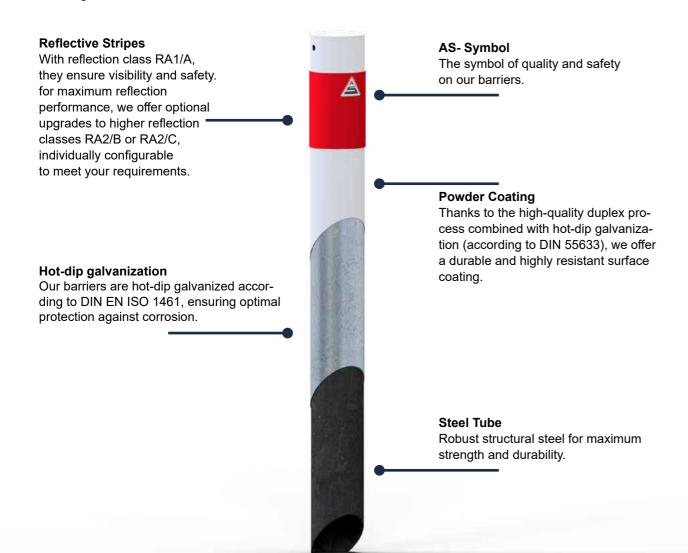


Color Variety – Choose Your Own Color

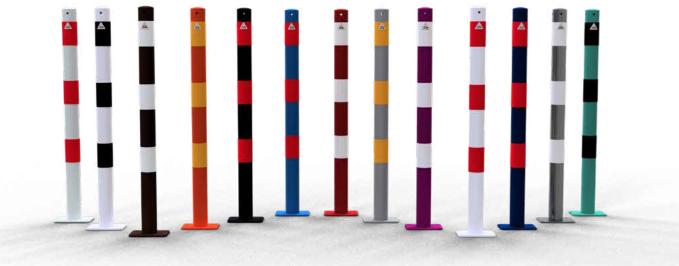

Variety for safety and structure.

Barrier posts

Our barrier posts program includes a comprehensive selection of bollards in various diameters and dimensions. Chain posts, barrier chains, flexible barrier posts, and impact protection bollards for industrial security complete this uniquely extensive range.

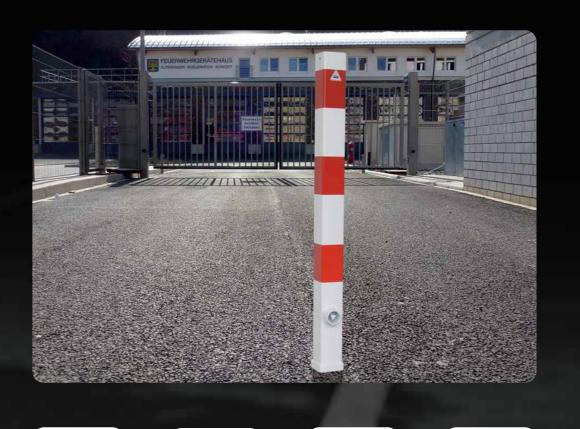



Barrier posts • Chain posts • Flexible plastic posts • Chains + Accessories

8

.

basically, barrier posts are hot-dip galvanized according to EN ISO 1461. Ornamental bollards are made of quality aluminium or hot-dip galvanized steel.

Symbols

B = Coated (white with red reflecting stripes or other color finishes) D = Top inner triangular lock acc. to DIN 3223

F = Fire brigade triangular lock acc. to DIN 3223

H = Ground socket

P = Ground anchor plate for plugging down

U = Foldable

V = Prepared for padlock

Z = Euro profile cylinder lock

+1 = 1 eyelet +2 = 2 eyelets

diameter in mm									squar	e in mm			
standard version		42	60	76	89	102	108	152	193	273	323	70x70	100x100
stationary for casting in concrete		11	12	17	21	22	23	24	26	28	29	34	45
stationary for plugging down	age	11	12	17	21	22	23	24	26	28		34	45
removable with triangular locking mechanism	Je p		13	18	21	22	23	25	27			35	45
removable with Euro profile cylinder lock	logi		13	18	21	22	23	25				37	45
foldable with triangular locking system	cata		14	19								36	
foldable with Euro profile cylinder lock			14	19								37	

foldable with triangular locking system	Ca		14	19					36	
foldable with Euro profile cylinder lock			14	19					37	
special versions										
stationary to drive in		11								
stationary tiltable				20		30				
fire brigade guide post stationary			16							
removable without locking system			16			25	27			
removable for padlock			15							
removable with a triangular lock on top	e page								38	
foldable with triangular locking mechanism on top	Ö								38	
foldable with lifting and tilting mechanism	atalou								41	
foldable 500 mm above ground	ပိ								44	
foldable for padlock			15						40	
foldable and removable									40	
removable with 8 mm triangular lock									43	
with triangular lock and Euro profile cylinder									39	
fully retractable									42	

Similar products: see sections ornamental posts, stainless steel posts, work site protection (yellow / black)



for more info scan the QR code

Barrier posts

steel tube Ø 42 x 2.5 mm with plastic cap 900 mm above ground



4042PB-2

4042EB-2



A light-weight version from our range of barrier posts for private users.

stationary for casting in concrete

total length: 1300 mm

	eyelet	FC	kg	part no.
	without eyelet	A•	2.3	4042
hot-dip galvanized	with 1 eyelet	A•	2.3	4042-1
	with 2 eyelets	Α•	2.3	4042-2
	without eyelet	A•	2.3	4042B
hot-dip galvanized, white coated, with red reflecting stripe	with 1 eyelet	A•	2.3	4042B-1
	with 2 eyelets	A•	2.3	4042B-2
		Α		

stationary to be fixed by plugs

with base plate 70 x 120 mm, and two holes for bolts

	eyelet	FC	kg	part no.
	without eyelet	A•	2.8	4042P
hot-dip galvanized	with 1 eyelet	Α•	2.8	4042P-1
	with 2 eyelets	Α•	2.8	4042P-2
	without eyelet	A•	2.8	4042PB
hot-dip galvanized, white coated, with red reflecting stripe	with 1 eyelet	A•	2.8	4042PB-1
	with 2 eyelets	Α•	2.8	4042PB-2

stationary drive-in

with drive-in tip,

total length: 1300 mm

· ·	A				
	eyelet	FC	kg	part no.	
	without eyelet	Α•	2.2	4042E	
hot-dip galvanized	with 1 eyelet	A•	2.2	4042E-1	
	with 2 eyelets	A•	2.2	4042E-2	
	without eyelet	A•	2.2	4042EB	
hot-dip galvanized, white coated, with red reflecting stripe	with 1 eyelet	Α•	2.2	4042EB-1	
	with 2 eyelets	Α•	2.2	4042EB-2	

10

for more info scan the QR code

This barrier or chain post can be used as a boundary post for pedestrian areas, parking lots, roads, safety zones etc.

Barrier posts

steel tube Ø 60 x 2.5 mm, with welded steel cap, 900 mm above ground

460B-2



stationary for casting in concrete

with ground anchor, total length: 1300 mm

	eyelet	FC	kg	part no.
	without eyelet	A•	4.9	460
hot-dip galvanized	with 1 eyelet	Α•	4.9	460-1
	with 2 eyelets	Α•	4.9	460-2
	without eyelet	A•	4.9	460B
hot-dip galvanized, white coated with three red reflecting stripes	with 1 eyelet	A•	4.9	460B-1
	with 2 eyelets	Α•	4.9	460B-2



suitable mounting material for this product: set of mounting bolts type 1

part no. 470-71

further accessories pages 55 - 62

stationary to be fixed by plugs with base plate 100 x 150 mm

	eyelet	FC	kg	part no.
	without eyelet	A•	4.0	460P
hot-dip galvanized	with 1 eyelet	A•	4.0	460P-1
	with 2 eyelets	Α•	4.0	460P-2
	without eyelet	A•	4.0	460PB
hot-dip galvanized, white coated, with three red reflecting stripes	with 1 eyelet	A•	4.0	460PB-1
	with 2 evelets	Α•	4.0	460PB-2



Configure your own post in just 3 steps!

Choose your base color, the color of the reflective stripes, and the desired reflection class – perfectly tailored to your needs.

For color options, reflection classes, and customization, **see pages 6 - 7.**Discover pre-configured posts for inspiration on **pages 49 - 51 of the catalog**



The stable locking and the easy handling grant a fast release of the barricade.

Barrier posts

steel tube Ø 60 x 2.5 mm, with welded steel cap, 900 mm above ground



460ZB


removable with triangular locking mechanism acc. to DIN 3223, self-engaging lock, with ground socket part-no. 460-40, approx. 400 mm below ground

	eyelet	FC	kg	part no.
	without eyelet	A•	6.4	460F
hot-dip galvanized	with 1 eyelet	Α•	6.4	460F-1
	with 2 eyelets	Α•	6.4	460F-2
	without eyelet	A•	6.4	460FB
hot-dip galvanized, white coated, with three red reflecting stripes	with 1 eyelet	A•	6.4	460FB-1
	with 2 eyelets	Α•	6.4	460FB-2

removable with Euro profile cylinder lock

three keys, self-engaging lock, with ground socket part-no. 460-40, approx. 400 mm below ground

	FC	kg	part no.
hot-dip galvanized	Α	8.1	460Z
hot-dip galvanized, white coated, with three red reflecting stripes	A•	8.1	460ZB









This barrier or chain post can be used as a boundary post for pedestrian areas, parking lots, roads, safety zones etc.

Barrier posts

steel tube Ø 60 x 2.5 mm, with welded steel cap, 900 mm above ground

470-60

460FUB



Content

foldable with triangular locking mechanism acc. to DIN 3223, self-engaging lock

to be fixed by plugs

with base plate 100 x 150 mm

	FC	kg	part no.
hot-dip galvanized	Α•	5.6	460FU
hot-dip galvanized, white coated, with three red reflecting stripes	A•	5.6	460FUB

for casting in concrete

with ground socket part-no. 470-60, approx. 400 mm below ground.

	FC	kg	part no.
hot-dip galvanized	Α•	7.9	460FUH
hot-dip galvanized, white coated, with three red reflecting stripes	Α•	7.9	460FUHB

foldable with Euro profile cylinder lock

three keys, self-engaging lock

fo be fixed by plugs

with base plate 100 x 150 mm

	FC	kg	part no.
hot-dip galvanized	Α•	5.8	460UZ
hot-dip galvanized, white coated, with three red reflecting stripes	A•	5.8	460UZB

for casting in concrete

with ground socket part-no, 470-60, approx. 400 mm below ground

	FC	kg	part no.
hot-dip galvanized	A•	8.1	460UZH
hot-dip galvanized, white coated, with three red reflecting stripes	A•	8.1	460UZHB



Barrier posts also available with eyelets - add the following to the part-no.: +1 for one eyelet or +2 for 2 eyelets; accessories see page 62. Posts can be delivered simultaneously locking or in a locking system; see page 55



steel tube Ø 60 x 2.5 mm. with welded steel cap. 900 mm above ground



removable for padlock

lockable, with ground socket part-no. 460-60, approx. 400 mm below ground

	eyelet	FC	kg	part no.
	without eyelet	A•	6.0	460V
hot-dip galvanized	with 1 eyelet	A•	6.0	460V-1
	with 2 eyelets	Α•	6.0	460V-2
	without eyelet	A•	6.0	460VB
hot-dip galvanized, white coated, with three red reflecting stripes	with 1 eyelet	Α•	6.0	460VB-1
	with 2 eyelets	A•	6.0	460VB-2

460VB

460UVB

470-60

foldable for padlock

self-engaging lock

to be fixed by plugs

with base plate 100 x 150 mm

	FC	kg	part no.
hot-dip galvanized	Α	6.5	460UV
hot-dip galvanized, white coated, with three red reflecting stripes	A•	6.5	460UVB

for casting in concrete

with ground socket part-no. 470-60, approx. 400 mm below ground

	FC	kg	part no.
hot-dip galvanized	Α	8.7	460UVH
hot-dip galvanized, white coated, with three red reflecting stripes	A•	8.7	460UVHB



suitable mounting material for this product: set of mounting bolts type 1 part no. 470-71 further accessories pages 55 - 62



460UZB

470-60

Work site protection

Barrier posts

steel tube Ø 60 x 2.5 mm, with welded steel cap, 900 mm above ground





removable without locking mechanism

with ground socket part-no. 460-10, approx. 400 mm below ground

	eyelet	FC	kg	part no.
	without eyelet	A•	6.8	460H
hot-dip galvanized	with 1 eyelet	A•	6.8	460H-1
	with 2 eyelets	Α•	6.8	460H-2
	without eyelet	Α•	6.8	460HB
hot-dip galvanized, white coated, with three red reflecting stripes	with 1 eyelet	A•	6.8	460HB-1
	with 2 eyelets	A•	6.8	460HB-2

Fire brigade guide posts – secure marking for emergency routes

Our fire brigade guide posts reliably mark fire department access roads and emergency routes, ensuring quick access for emergency personnel.



Fire brigade guide posts

steel tube Ø 60 x 2.5 mm, 500 mm above ground, fixed installation, for concreting in, hot-dip galvanized, white coated, with ground anchor, headpiece approx. 100 mm, total length: 900 mm

	FC	kg	part no.
head black	Α•	3.5	4061B
head red	Α	3.5	4061BR



for more info scan the QR code

These barrier or chain posts can be used as boundary posts for pedestrian areas, parking lots, roadways, safety zones, and more.

476B

476PB

Barrier posts

steel tube Ø 76 x 2.6 mm, with welded steel cap, 900 mm above ground



stationary for casting in concrete

with ground anchor,

total length: 1400 mm

	eyelet	FC	kg	part no.
hot-dip galvanized	without eyelet	A•	7.0	476
	with 1 eyelet	A•	7.0	476-1
	with 2 eyelets	A•	7.0	476-2
	without eyelet	A•	7.0	476B
hot-dip galvanized, white coated, with three red reflecting stripes	with 1 eyelet	Α•	7.0	476B-1
	with 2 eyelets	A•	7.0	476B-2


stationary to be fixed by plugs

with base plate 100 x 150 mm, total length: 900 mm

ŭ	A			
	eyelet	FC	kg	part no.
	without eyelet	Α•	5.1	476P
hot-dip galvanized	with 1 eyelet	A•	5.1	476P-1
	with 2 eyelets	Α•	5.1	476P-2
	without eyelet	A•	5.1	476PB
hot-dip galvanized, white coated, with three red reflecting stripes	with 1 eyelet	A•	5.1	476PB-1
5 ,	with 2 eyelets	A•	5.1	476PB-2



also available in yellow / black, see work site protection page 168 color variants, reflection classes, and customization, see pages 6 - 7



4061B

Barrier posts

steel tube Ø 76 x 2.6 mm, with welded steel cap, 900 mm above ground

476FB

476ZB



Content

removable with triangular locking mechanism acc. to DIN 3223, self-engaging lock, with ground socket part-no. 476-40,

approx. 400 mm below ground

	FC	kg	part no.	
hot-dip galvanized	A•	12.0	476F	
hot-dip galvanized, white coated, with three red reflecting stripes	Α•	12.0	476FB	



color variants, reflection classes, and customization, see pages 6 - 7

removable, with Euro profile cylinder lock

three keys, self-engaging lock, with ground socket part-no. 476-40, approx. 400 mm below ground

	FC	kg	part no.
hot-dip galvanized	Α	12.0	476Z
hot-dip galvanized, white coated, with three red reflecting stripes	A•	12.0	476ZB



Barrier posts also available with eyelets - add the following to the part-no.: +1 for one eyelet or +2 for 2 eyelets; accessories see page 62. Posts can be delivered simultaneously locking or in a locking system; see page 55

Barrier posts

steel tube Ø 76 x 2.6 mm, with welded steel cap, 900 mm above ground



foldable with triangular locking mechanism

acc. to DIN 3223, self-engaging lock

to be fixed by plugs

with base plate 100 x 150 mm

	FC	kg	part no.
hot-dip galvanized	Α	6.8	476FU
hot-dip galvanized, white coated, with three red reflecting stripes	A•	6.8	476FUB

for casting in concreterete

with ground socket part.-no. 470-60, approx. 400 mm below ground

	FC	kg	part no.
hot-dip galvanized	Α	9.2	476FUH
hot-dip galvanized, white coated,	Α•	9.2	476FUHB

foldable with Euro profile cylinder lock

three keys, self-engaging lock

to be fixed by plugs

with base plate 100 x 150 mm

	FC	kg	part no.
hot-dip galvanized	Α	8,6	476UZ
hot-dip galvanized, white coated, with three red reflecting stripes	Α•	8,6	476UZB

for casting in concreterete

with ground socket part-no. 470-60, approx. 400 mm below ground

	FC	kg	part no.
hot-dip galvanized	Α	10,9	476UZH
hot-dip galvanized, white coated, with three red reflecting stripes	Α•	10,9	476UZHB

476UZB 470-60

476FUB

470-60

18

Work site protection

for more info scan the QR code

Barrier posts

steel tube Ø 76 x 2.6 mm, with welded steel cap, 900 mm above ground



stationary can be tilted 30° to all sides

with base plate 100 x 150 mm

for plugging down or for fixing to ground socket part-no. 470-60

	FC	kg	part no.
hot-dip galvanized	Α	5.9	4076P
hot-dip galvanized, white coated, with three red reflecting stripes	A•	5.9	4076PB
	prod	A A able mounting mateduct: set of mounting too. 1-71	



4076PB

	FC	kg
ground socket for casting in concrete (order together with the barrier post if you want to cast in concrete)	A•	5.9



Barrier posts also available with eyelets add the following to the part-no.: +1 for one eyelet or +2 for 2 eyelets; accessories see page 55 - 62

color variants, reflection classes, and customization, see pages 6 - 7



Barrier posts

489PB

Content

steel tube Ø 89 x 2.9 mm, with welded steel cap, 900 mm above ground



stationary for casting in concrete

with ground anchor, total length: approx. 1300 mm

	FC	kg	part no.
hot-dip galvanized	A•	8.8	489
hot-dip galvanized, white coated, with three red reflecting stripes	A•	8.8	489B

stationary to be fixed by plugs

with base plate 100 x 150 mm

	FC	kg	part no.
hot-dip galvanized	A•	6.7	489P
hot-dip galvanized, white coated, with three red reflecting stripes	A•	6.7	489PB

removable self-engaging lock,

with hot-dip galvanized ground socket part-no. 470-10, approx. 500 mm below ground

with triangular locking mechanism acc. to DIN 3223

	FC	kg	part no.
hot-dip galvanized	Α	12.5	489F
hot-dip galvanized, white coated, with three red reflecting stripes	Α•	12.5	489FB


with profile cylinder lock, three keys incl.

	FC	kg	part no.
hot-dip galvanized	Α	11.8	489Z
hot-dip galvanized, white coated, with three red reflecting stripes	Α	11.8	489ZB



489FB

also available in yellow / black, see work site protection pages 186 color variants, reflection classes, and customization, see pages 6 - 7



20

493B

493FB

493PB

Barrier posts

steel tube Ø 102 x 2.9 mm, with welded steel cap,

491B

491FB

491PB

22

900 mm above ground



stationary for casting in concrete

with ground anchor, total length: approx. 1300 mm

	FC	kg	part no.
hot-dip galvanized	Α•	9.5	491
hot-dip galvanized, white coated, with three red reflecting stripes	A•	9.5	491B

stationary to be fixed by plugs

with base plate 200 x 200 mm

	FC	kg	part no.
hot-dip galvanized	Α•	9.4	491P
hot-dip galvanized, white coated, with three red reflecting stripes	Α	9.4	491PB

removable self-engaging lock,

with hot-dip galvanized ground socket part-no. 470-10, approx. 500 mm below ground

with triangular locking mechanism acc. to DIN 3223

	FC	kg	part no.
hot-dip galvanized	Α	14.9	491F
hot-dip galvanized, white coated, with three red reflecting stripes	Α•	14.9	491FB

with profile cylinder lock, three keys incl.

	FC	kg	part no.
hot-dip galvanized	Α	12.8	491Z
hot-dip galvanized, white coated, with three red reflecting stripes	Α	12.8	491ZB

A	
	barrier posts also available with eyelets, see page 62



steel tube Ø 108 x 2.9 mm, with welded steel cap, 900 mm above ground



stationary for casting in concrete

with ground anchor total length: approx. 1300 mm

	FC	kg	part no.
hot-dip galvanized	Α•	11.0	493
hot-dip galvanized, white coated, with three red reflecting stripes	Α•	11.0	493B

stationary to be fixed by plugs

with base plate 200 x 200 mm

	FC	kg	part no.
hot-dip galvanized	Α•	11.0	493P
hot-dip galvanized, white coated, with three red reflecting stripes	Α•	11.0	493PB

removable, self-engaging lock,

with hot-dip galvanized ground socket part-no. 470-10, approx. 500 mm below ground

with triangular locking mechanism acc. to DIN 3223

	FC	kg	part no.
hot-dip galvanized	Α	14.0	493F
hot-dip galvanized, white coated, with three red reflecting stripes	A•	14.0	493FB

with profile cylinder lock three keys incl.

	FC	kg	part no.
hot-dip galvanized	Α	13.2	493Z
hot-dip galvanized, white coated, with three red reflecting stripes	Α	13.2	493ZB




color variants, reflection classes, and customization, see pages 6 - 7

Content

Steel tube bollard Ø 152 x 3.2 mm, with welded steel cap


40151B

40153B



	total length in mm	FC	kg	part no.
	1200	Α•	13.3	40150
hot-dip galvanized	1500	В•	16.5	40151
	2000	В•	21.9	40152
	1200	Α	15.0	40150B
hot-dip galvanized, white coated, with three red reflecting stripes	1500	В•	16.5	40151B
war and roa rondanig carped	2000	В•	21.9	40152B

Removable caps for filling bollards with concrete

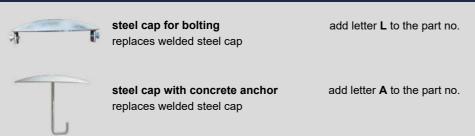

for plugging down with base plate 220 x 220 mm

	total length in mm	FC	kg	part no.
hot-dip galvanized	1000	Α•	13.9	40153
hot-dip galvanized, white coated, with three red reflecting stripes	1000	A•	13.9	40153B



Steel tube bollards

Ø 152 x 3.2 mm, with welded steel cap

40151HB

40151FB

including ground socket part-no. 40151-10, approx. 500 mm below ground, removable without locking mechanism

<u> </u>				
	Total length in mm	FC	kg	part no.
hot din golvenized	1500	В	26.0	40151H
hot-dip galvanized	2000	В	32.0	40152H
hot-dip galvanized, white coated,	1500	В	26.0	40151HB
with three red reflecting stripes	2000	В	32.0	40152HB

height above ground: 1000 mm, including ground socket part-no. 470-10,

approx. 500 mm below ground

removable with triangular locking mechanism acc. to DIN 3223

	FC	kg	part no.
hot-dip galvanized	В	20.1	40151F
hot-dip galvanized, white coated, with three red reflecting stripes	В	20.1	40151FB

removable with profile cylinder lock, three keys incl.

	FC	kg	part no.
hot-dip galvanized	В	17.5	40151Z
hot-dip galvanized, white coated, with three red reflecting stripes	В	17.5	40151ZB



also available in yellow / black, see work site protection pages 190 / 191 color variants, reflection classes, and customization, see pages 6 - 7



B 32.0 40152HB



27

These heavy bollards can be used as crash guard, particularly in front of entrances, halls, service stations, etc. They can also protect roof overhangs or serve as guiding bollard in front of ramps, gates, etc.

Steel tube bollard

Ø 193 x 3.6 mm. with welded steel cap



40191B



40193B




Content

stationary

or casting in concrete

	total length in mm	FC	kg	part no.
	1200	Α•	20.9	40190
hot-dip galvanized	1500	В•	26.0	40191
	2000	В•	34.4	40192
	1200	Α	20.9	40190B
hot-dip galvanized, white coated, with three red reflecting stripes	1500	В	26.0	40191B
3 - 7	2000	В	34.4	40192B

Removable caps for filling bollards with concrete

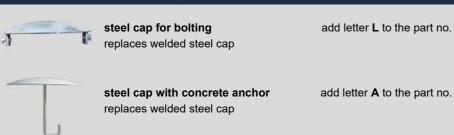

for plugging down

with base plate 360 x 360 mm

	total length in mm	FC	kg	part no.
hot-dip galvanized	1000	A•	23.6	40193
hot-dip galvanized, white coated, with three red reflecting stripes	1000	Α	23.6	40193B



suitable fastening material for this product: set of mounting bolts type 2 part no. 470-72 further accessories see page 55

Steel tube bollard

Ø 193 x 3.6 mm with welded steel cap, removable for temporary remove.



0



including ground socket part-no. 40191-10 approx. 500 mm below ground

removable

without locking mechanism

	total length in mm	FC	kg	part no.
hat dip galvanized	1500	В	38.0	40191H
hot-dip galvanized	2000	В	50.0	40192H
hot-dip galvanized, white coated,	1500	В	38.0	40191HB
with three red reflecting stripes	2000	В	50.5	40192HB



also available in yellow / black, see work site protection pages 192 / 193 color variants, reflection classes, and customization, see pages 6 - 7



height above ground: 1000 mm including ground socket part-no. 470-10 approx. 500 mm below ground

removable

with triangular lock

	FC	kg	part no.
hot-dip galvanized	В	27.6	40191F
hot-dip galvanized, white coated, with three red reflecting stripes	В	27.6	40191FB

40191FB 26

Steel tube bollard Ø 273 x 5.0 mm, with welded steel cap



stationary

for casting in concrete

	total length in mm	FC	kg	part no.
hot-dip galvanized	1500	В	51.1	40271
not-dip gaivanized	2000	В	67.6	40272
hot-dip galvanized, white coated, with three red reflecting stripes	1500	В	51.1	40271B
	2000	В	67.6	40272B

Removable caps for filling bollards with concrete

steel cap with concrete anchor replaces welded steel cap

add letter A to the part no.



40271

40273B

stationary

for plugging down, with base plate 360 x 360 mm

	total length in mm	FC	kg	part no.
hot-dip galvanized	1500	В	58.9	40273
hot-dip galvanized, white coated, with three red reflecting stripes	1500	В	58.9	40273B



suitable fastening material for this product: set of mounting bolts type 2 part no. 470-72 further accessories see page 55



for more info scan the QR code

These heavy bollards can be used as crash guard, particularly in front of entrances, halls, service stations, etc. They can also protect roof overhangs or serve as guiding bollard in front of ramps, gates, etc.

Steel tube bollard

Ø 323 x 5.0 mm with welded steel cap



stationary for casting in co

for casting in concrete

	total length in mm	FC	kg	part no.
	1500	В	60.0	40321
hot-dip galvanized	2000	В	80.5	40322
	2400	В	96.0	40324
	1500	В	60.0	40321B
hot-dip galvanized, white coated, with three red reflecting stripes	2000	В	80.5	40322B
	2400	В	96.0	40324B

Removable caps for filling bollards with concrete


s

steel cap with concrete anchor replaces welded steel cap

add letter **A** to the part no.



these posts are available in yellow / black, see section work site protection pages 194 / 195 color variants, reflection classes, and customization, see pages 6 - 7



site protection

Content



BICKEL-TUNING
HA ZX 63
Land and the state of the state of

Steel tube bollard

Ø 152 x 3.2 mm, with welded steel cap, tiltable

stationary for plugging down

	total length in mm	FC	kg	part no.
hat dip galvanizad	1000	Α	30.0	401530N
hot-dip galvanized	1500	В	35.3	401535N
hot-dip galvanized, white coated, with three red reflecting stripes	1000	Α	30.0	401530NB
	1500	В	35.3	401535NB






for more info scan the QR code

This tiltable steel tube bollard is suitable for high pressure und comes back to start position after pressure release

for protecting buildings and to minimize damages on cars.

401530NB



Suggestion for mounting

casting in concrete of posts or ground sockets

1.

excavation for concrete basis

ze: diameter / profile of post or ground socket

+ approx. 300 mm


depth: length of height below ground of post or ground socket + approx. 100 mm

2.
gravel fill (drainage)
(for removable posts)

3. post and socket are put centrical in basis hole top egde ground socket same as top edge ground

4. fill with concrete, adjust perpendicular with air level and smooth by trowel

5. hardening and prove locking

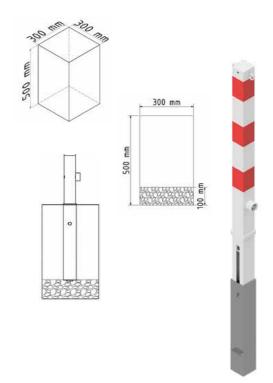

Eyelets for chains

Eyelets

inner diameter Ø 20 mm, outer diameter Ø 35 mm


Position of eyelets

standard positions:

barrier post with 1 eyelet: position D barrier post with 2 eyelets: position D + B

000


Posts removable

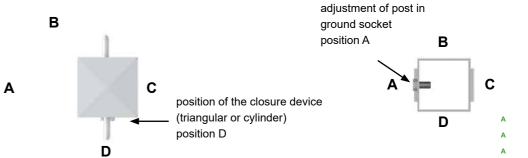

Stationary posts with base plate

c

Posts foldable





Content

Barrier posts as **E-charging station** protection

with welded steel cap, 900 mm above ground, total length: approx. 1300 mm

	film color	film color	film color
for casting in concrete	blue	red	green

surface	diameter in mm	kg	FC	part no.	part no.	part no.
hot-dip galvanized	ø 76	7.0	Α	4L76SBL	4L76SRO	4L76SGR
hot-dip galvanized	ø 89	8.8	Α	4L89SBL	4L89SRO	4L89SGR
hot-dip galvanized	ø 102	9.5	Α	4L91SBL	4L91SRO	4L91SGR
white	ø 76	7.0	Α	4L76BSBL	4L76BSRO	4L76BSGR
white	ø 89	8.8	Α	4L89BSBL	4L89BSRO	4L89BSGR
white	ø 102	9.5	Α	4L91BSBL	4L91BSRO	4L91BSGR

for plugging down

surface	diameter in mm	kg	FC	part no.	part no.	part no.
hot-dip galvanized	ø 76	9.1	Α	4L76PSBL	4L76PSRO	4L76PSGR
hot-dip galvanized	ø 89	7.0	Α	4L89PSBL	4L89PSRO	4L89PSGR
hot-dip galvanized	ø 102	9.5	Α	4L91PSBL	4L91PSRO	4L91PSGR
white	ø 76	9.1	Α	4L76PBSBL	4L76PBSRO	4L76PBSGR
white	ø 89	7.0	Α	4L89PBSBL	4L86PBSRO	4L89PBSGR
white	ø 102	9.5	Α	4L91PBSBL	4L91PBSRO	4L91BPSGR



Impact protection bollard as E-charging station protection

with welded steel cap



or casting in co	ncrete
otal length: appr	ox. 1500 mm

diameter in mm ø 152

ø 193

ø 152

ø 193

16.9

29.0

19.9

26.0

	film color blue	film color red	film color green	
;	part no.	part no.	part no.	
	4L151SBL	4L151SRO	4L151SGR	
	4L191SBL	4L191SRO	4L191SGR	

4L151BSGR

4L191BSGR

4L151BSRO

4L191BSRO

for plugging down

surface

hot-dip galvanized hot-dip galvanized

white

total length: approx. 1000 mm

surface	diameter in mm	kg	FC	part no.	part no.	part no.
hot-dip galvanized	ø 152	14.0	В	4L153SBL	4L153SRO	4L153SGR
hot-dip galvanized	ø 193	24.0	В	4L193SBL	4L193SRO	4L193SGR
white	ø 152	14.0	В	4L153BSBL	4L153BSRO	4L153BSGR
white	ø 193	24.0	В	4L193BSBL	4L193BSRO	4L193BSGR

B 4L151BSBL

B 4L191BSBL



Also available as barrier and impact protection brackets for charging stations, see the barrier elements section on **pages 120 - 121**

A very sturdy boundary post, can be used for all applications, ideal also as barrier chain post.

Barrier posts

square tube 70 x 70 mm, with welded steel cap, 900 mm above ground

470B

470PB



stationary for casting in concrete

with ground anchor, total length: 1300 mm

	eyelet	FC	kg	part no.
	without eyelet	A•	7.2	470
hot-dip galvanized	with 1 eyelet	A•	7.2	470-1
	with 2 eyelets	A•	7.2	470-2
hot-dip galvanized, white coated, with three red reflecting stripes	without eyelet	A•	7.2	470B
	with 1 eyelet	A•	7.2	470B-1
	with 2 eyelets	A•	7.2	470B-2



suitable fastening material for this product: set of mounting bolts type 1 part no. 470-71

stationary to be fixed by plugs

with base plate 100 x 150 mm

	eyelet	FC	kg	part no.
hot-dip galvanized	without eyelet	A•	5.6	470P
	with 1 eyelet	Α•	5.6	470P-1
	with 2 eyelets	A•	5.6	470P-2
	without eyelet	A•	5.6	470PB
hot-dip galvanized, white coated, with three red reflecting stripes	with 1 eyelet	Α•	5.6	470PB-1
	with 2 eyelets	A•	5.6	470PB-2



these posts are available in yellow / black, see section work site protection page 187 color variants, reflection classes, and customization, see pages 6 - 7



This post is ideal for barricading places, entrances, street and pedestrian areas, etc. The sturdy, maintenance-free triangular locking mechanism acc. to DIN 3223 makes it easy to handle without much effort even after many years. All posts are hot-dip galvanized for longer life.

Barrier posts

square tube 70 x 70 mm, with welded steel cap, 900 mm above ground

470FB



approx. 500 mm long

	eyelet	FC	kg	part no.
hot-dip galvanized	without eyelet	A•	11.5	470F
	with 1 eyelet	A•	11.5	470F-1
	with 2 eyelets	Α•	11.5	470F-2
hot-dip galvanized, white coated, with three red reflecting stripes	without eyelet	A•	11.5	470FB
	with 1 eyelet	Α•	11.5	470FB-1
	with 2 eyelets	A•	11.5	470FB-2



for more info scan the QR code





k site protection | Outdoor equipm

A barrier post for heavy-duty every-day service. Strong corrosion-protected (hot dip galvanized) hinged base plate with strong hinge pin and sturdy, tear-proof mounting bracket. The maintenance-free leaf spring-loaded locking mechanism can be opened by a DIN conforming triangular wrench without effort at any time.

Barrier posts

steel tube 70 x 70 mm, with welded steel cap, 900 mm above ground





foldable with triangular locking mechanism acc. to DIN 3223, with leaf spring, self-engaging lock

to be fixed by plugs with base plate 100 x 150 mm

	FC	kg	part no.
hot-dip galvanized	A•	7.5	470FU
hot-dip galvanized, white coated, with three red reflecting stripes	A•	7.5	470FUB

for casting in concrete with ground socket part-no. 470-60, approx. 400 mm below ground

	FC	kg	part no.	
hot-dip galvanized	A•	10.0	470FUH	
hot-dip galvanized, white coated, with three red reflecting stripes	A•	10.0	470FUHB	

suitable fastening material for this product:
set of mounting bolts type 1
part no.
470-71

A very stable barrier post, not just for private use.

Barrier posts

steel tube 70 x 70 mm, with welded steel cap, 900 mm above ground



470ZB



foldable with Euro profile cylinder lock three keys, self-engaging lock

to be fixed by plugs with base plate 100 x 150 mm

	FC	kg	part no.
hot-dip galvanized	Α•	9.0	470UZ
hot-dip galvanized, white coated, with three red reflecting stripes	A•	9.0	470UZB

for casting in concrete with ground socket part-no. 470-60, approx. 400 mm below ground

	FC	kg	part no.
hot-dip galvanized	A•	11.3	470UZH
hot-dip galvanized, white coated, with three red reflecting stripes	A•	11.3	470UZHB

Α

removable with Euro profile cylinder lock three keys, self-engaging lock, with ground socket part-no. 470-10, approx. 500 mm below ground

	FC	kg	part no.
hot-dip galvanized	Α•	13,2	470Z
hot-dip galvanized, white coated, with three red reflecting stripes	A•	13,2	470ZB



posts can be delivered simultaneously locking or in a locking system, see page 55

With triangular locking mechanism on top. Alternative to 470F - 470FB or 470FU - FUB.

Barrier posts

steel tube 70 x 70 mm, with steel cap, 900 mm above ground



removable with triangular locking mechanism acc. to DIN 3223, top, self-engaging lock, with ground socket part-no. 470-10,

approx. 500 mm below ground

	FC	kg	part no.
hot-dip galvanized	Α	13.0	470D
hot-dip galvanized, white coated, with three red reflecting stripes	Α•	13.0	470DB



	FC	kg	part no.
hot-dip galvanized	Α	13.0	470D
hot-dip galvanized, white coated, with three red reflecting stripes	Α•	13.0	470DB

foldable with triangular locking mechanism acc. to DIN 3223, top, self-engaging lock

to be fixed by plugs with base plate 100 x 150 mm

	FC	kg	part no.
hot-dip galvanized	Α	8.7	470UD
hot-dip galvanized, white coated, with three red reflecting stripes	Α•	8.7	470UDB

for casting in concrete with ground socket part-no. 470-60, approx. 400 mm below ground

	FC	kg	part no.
hot-dip galvanized	Α	11.0	470UDH
hot-dip galvanized, white coated, with three red reflecting stripes	A•	11.0	470UDHB

These barrier posts can be opened both with a Euro profile cylinder key and a triangular wrench that conforms with DIN 3223. This ensures that the fire brigade and rescue services have access at any time.

Barrier posts

steel tube 70 x 70 mm, with steel cap, 900 mm above ground



470FZB

470FUZB

470-60



removable with Euro profile cylinder lock three keys and triangular locking mechanism acc. to DIN 3223, self-engaging lock, with ground socket part-no. 470-10, approx. 500 mm below ground

	FC	kg	part no.
hot-dip galvanized	Α	13.3	470FZ
hot-dip galvanized, white coated, with three red reflecting stripes	A•	13.0	470FZB

foldable with Euro profile cylinder lock three keys and triangular locking mechanism acc. to DIN 3223, self-engaging lock to be fixed by plugs with base plate 100 x 150 mm

	FC	kg	part no.
hot-dip galvanized	Α	9.2	470FUZ
hot-dip galvanized, white coated, with three red reflecting stripes	A•	9.2	470FUZB

for casting in concrete with ground socket part-no. 470-60, approx. 400 mm below ground

	FC	kg	part no.
hot-dip galvanized	Α	11.5	470FUZH
hot-dip galvanized, white coated, with three red reflecting stripes	A•	11.5	470FUZHB

470DB

38

470FUKHB

470UZKHB

Barrier posts

with steel cap,

steel tube 70 x 70 mm,

900 mm above ground



If the situation requires, foldable barrier posts that can also be removed can be used. The multipurpose wrench part-no. 470-40 is required in any case (order it with the post).

foldable and removable

with ground socket part-no. 470-10, approx. 500 mm below ground

	FC	kg	part no.
hot-dip galvanized			
with triangular locking mechanism	A•	12.5	4701FUH
with Euro profile cylinder lock	A•	14.0	4701UZH
with triangular and Euro profile cylinder lock	A•	14.2	4701FUZH
hot-dip galvanized, white coated, with three red reflecting stripes			
5 1			
with triangular locking mechanism	A•	12.5	4701FUHB
with triangular locking	A•	12.5 14.0	4701FUHB 4701UZHB
with triangular locking mechanism		.2.0	

Multipurpose wrer	ıch
	→

FC	kg	part no.
A•	0.4	470-40

4701FUZHB

foldable for padlock

self-engaging lock

to be fixed by plugs

with base plate 100 x 150 mm

	FC	kg	part no.
hot-dip galvanized	Α	8.9	470UV
hot-dip galvanized, white coated, with three red reflecting stripes	Α•	8.9	470UVB

for casting in concrete

with ground socket part-no. 470-60, approx. 400 mm below ground

approx. 400 mm below ground				
	FC	kg	part no.	
hot-dip galvanized	Α	11.2	470UVH	
hot-dip galvanized, white coated,	A•	11.2	470UVHB	



Barrier posts

steel tube 70 x 70 mm, with welded steel cap, 900 mm above ground



foldable with triangular locking mechanism acc. to DIN 3223, with lifting and tilting mechanism, with leaf spring, self-engaging lock including ground socket

	FC	kg	part no.
hot-dip galvanized	Α	11.0	470FUKH
hot-dip galvanized, white coated, with three red reflecting stripes	A•	11.0	470FUKHB



foldable, with Euro profile cylinder lock with three keys, self-engaging lock, with lifting and tilting mechanism, with flat spring, self locking with ground socket

	FC	kg	part no.
hot-dip galvanized	Α	12.3	470UZKH
hot-dip galvanized, white coated, with three red reflecting stripes	A•	12.3	470UZKHB

Euro profile cylinder

40

470UVB

470-60

Work site protection

Barrier posts steel tube 70 x 70 mm, 900 mm above ground



Content

fully retractable with triangular locking system acc. to DIN 3223,


ground socket 80 x 80 x 3 mm, overall length: approx. 1100 mm

	FC	kg	part no.	
hot-dip galvanized with white / red reflecting stripes	Α	16.8	470DL	

fully retractable with Euro profile cylinder lock

with ground socket part-no. 80 x 80 x 3 mm, total length: approx. 1100 mm

	FC	kg	part no.	
hat din galvanized with white / red reflecting strings	۸	17 1	47071	



Instructions for mounting

Always pay attention to adequate drainage for removable posts (provide gravel fill). Do not install in standing water!

Barrier post with 8 mm triangular locking mechanism as interesting alternative to the Euro profile cylinder lock or the conventional triangular locking mechanism acc. with DIN 3223. The post can be unlocked without effort with a small, handy 8 mm triangular wrench.

Barrier posts

steel tube 70 x 70 mm, 900 mm above ground



470NB



removable with 8 mm triangular lock

self-engaging lock, including an 8 mm triangular wrench part-no. 4039, with ground socket part-no. 470-10, approx. 500 mm below ground

	FC	kg	part no.
hot-dip galvanized	Α	12.8	470N
hot-dip galvanized and red coated with reflecting stripes	A•	12.8	470NB

toldable with 8 mm triangular lock

self-engaging lock, including an 8 mm triangular wrench part-no. 4039.

to be fixed by plugs with base plate 100 x 150 mm

	FC	kg	part no.
hot-dip galvanized	Α	7.3	470UN
hot-dip galvanized and red coated with reflecting stripes	A•	7.3	470UNB

for casting in concrete

with ground socket part-no. 470-60, approx. 400 mm below ground

	FC	kg	part no.
hot-dip galvanized	Α	9.6	470UNH
hot-dip galvanized and red coated with reflecting stripes	A•	9.6	470UNHB
			Α

8 mm triangular

ock key	
ey for opening the posts	

kg	FC	part no.
0.1	A•	4039

470-60

470UNB

470ZL

470DL

Euro profile

cylinder

This 500 mm high post is very suitable for parking situation without enough space.

Barrier posts

steel tube 70 x 70 mm, 500 mm above ground

4715FUB

4715UZB

470-60





foldable with triangular locking mechanism acc. to DIN 3223, self-engaging lock

to be fixed by plugs

with base plate 100 x 150 mm or for mounting to ground socket part-no. 470-60

	FC	kg	part no.	
hot-dip galvanized	Α	5.4	4715FU	
hot-dip galvanized and white coated with two red reflecting stripes	Α	5.4	4715FUB	

foldable with Euro profile cylinder lock with three keys, self-engaging lock

to be fixed by plugs

with base plate 100 x 150 mm or for mounting to ground socket part-no. 470-60

	FC	kg	part no.	
hot-dip galvanized	Α	6.0	4715UZ	
hot-dip galvanized and white coated	A•	6.0	4715UZB	

Ground socket

for casting in concrete (order together with the barrier post if you want to cast in concrete)

FC	kg	part no.
A•	2.3	470-60

A heavy, sturdy barrier post for special purposes.

Barrier posts,

steel tube 100 x 100 x 3 mm, with welded steel cap, 950 mm above ground



40100PB

40100FB

stationary for casting in concrete with ground anchor, total length: 1250 mm

	FC	kg	part no.
hot-dip galvanized	Α	11.1	40100
hot-dip galvanized, white coated, with red reflecting stripes	А	11.1	40100B

stationary to be fixed by plugs with base plate 200 x 200 mm

	FC	kg	part no.
hot-dip galvanized	Α	10.8	40100P
hot-dip galvanized, white coated, with red reflecting stripes	Α	10.8	40100PB

removable, with triangular locking mechanism acc. to DIN 3223, with self-engaging lock, with ground socket part-no. 470-10, approx. 500 mm below ground

with triangular locking mechanism acc. to DIN 3223

	FC	kg	part no.
hot-dip galvanized	Α	16.7	40100F
hot-dip galvanized, white coated, with three red reflecting stripes	Α	16.7	40100FB

with profile cylinder lock, three keys incl.

	FC	kg	part no.
hot-dip galvanized	Α	16.7	40100Z
hot-dip galvanized, white coated, with three red reflecting stripes	Α	16.7	40100ZB



color variants, reflection classes, and customization, see pages 6 - 7



Work site protection

Content



470PB-1

470-60

Barrier chain posts with Euro profile lock cylinders for hooking up and locking chains (engages automatically, unlocks by key), suitable particularly for securing larger areas for parking or efficiently keeping traffic away from property gates, yards, loading and unloading areas, etc. These barrier chain posts are very easy to handle. The barrier post is unlocked by the key, and when the car has been parked the chain is hooked into the locking mechanism of the post. It locks automatically. The mechanism is maintenance-free. For versatile use, e.g., in multi-story car parks or as access barrier. It also prevents the parking of two-wheelers. Can be used as serial system.



square tube 70 x 70 mm, 900 mm above ground

locking mechanism, with Euro profile cylinder lock with three keys

for plugging down with base plate 100 x 150 mm or for mounting to ground socket part-no. 470-60

	eyelet	FC	kg	part no.
hot-dip galvanized	without eyelet	Α	6.1	4711P
hot-dip galvanized for serial systems (center post)	with 1 eyelet	Α	6.1	4711P+1
hot-dip galvanized and white coated with three red reflecting stripes	without eyelet	Α•	6.1	4711PB
hot-dip galvanized and white coated with three red reflecting stripes for serial systems (center post)	with 1 eyelet	Α•	6.1	4711PB+1

End post without lock

	eyelet	FC	kg	part no.
hot-dip galvanized	with 1 eyelet	Α•	5.6	470P-1
hot-dip galvanized and white coated with three red reflecting stripes	with 1 eyelet	A•	5.6	470PB-1

Ground socket	FC	kg	part no.
for casting in concrete (order together with the barrier	A•	2.3	470-60
post if you want to cast in concret	te)		A





4040KB

Movable chain post as temporary barrier, of high stability. for outdoor or indoor installation. Post separates easily from the foot plate for moving to a new site. Simple installation and space-saving storage.

Chain post, heavy design

of \varnothing 60 mm steel tube with welded steel cap and eyelets for fixing the chain, height approx. 900 mm, foot plate of recycled material, 400 x 400 x 100 mm, black, removable

	FC	kg	part no.
hot-dip galvanized and white coated with three red reflecting stripes	A•	15.0	460KB

Plastic chain post

lightweight chain post of plastic material for fast installation of barriers, including triangular plastic foot, side length 300 mm, filled with concrete, plastic tube \emptyset 40 mm, height: 900 mm, with 4 chain holders integrated in the cap

	FC	kg	part no.
white / red	Α•	3.0	4040KB

Plastic chain post

with foot \varnothing 300 mm for filling by customer, plastic tube \varnothing 40 mm, height: 900 mm, with 4 chain holders integrated in the cap

	FC	kg	part no.
white / red	A•	2.0	4041KB

for indoor and outdoor

Chain post set

version: 6 plastic posts \emptyset 40 mm, with 4 chain holders integrated in the cap, 10 m plastic chain, 10 connectors


with concrete-filled triangular plastic feet, side length 300 mm

	FC	kg	part no.
white / red	A•	20.0	4040KBSET

with a fillable round plastic base, Ø 300 mm

	FC	kg	part no.
white / red	A•	20.0	4040KBSET







Discover our Black-Line

Our Black-Line combines elegance with functionality, offering a high-quality solution for stylish barriers. Whether in urban spaces, corporate premises, or historic cityscapes – these bollards not only enhance security but also blend seamlessly into any environment.

Choose aesthetic security with our exclusive Black-Line.

Use the original article and expand it accordingly with the appropriate article number of the film.



Content

Barrier posts,

hot-dip galvanized, matte black coated with red and white reflective film strips

S	stationary	ø 60 mm	ø 76 mm	70 x 70 mm

	FC	part no. kg	part no. kg	part no. kg
for casting in concrete with ground anchor, total length: approx. 1300 mm	Δ		476B-RAL9005FS-RW1A 7,0	470B-RAL9005FS-RW1A 7,2
to be fixed by plugs with base plate 100 x 150 mm	Α	460PB-RAL9005FS-RW1A	476PB-RAL9005FS-RW1A	470PB-RAL9005FS-RW1A

removable

self-engaging lock, incl. base rosette,

with hot-dip galvanized ground sleeve, approx. 400 mm below ground

		FC	part no. kg	part no. kg	part no. kg
	with triangular locking mechanism acc. to DIN 3223	Α	460FB-RAL9005FS-RW1A 6,4	476FB-RAL9005FS-RW1A 12,0	470FB-RAL9005FS-RW1A 11,5
Ī	with profile cylinder lock, three keys incl.	А	460ZB-RAL9005FS-RW1A 8,1	476ZB-RAL9005-RW1A 12,0	470ZB-RAL9005FS-RW1A 13,2

foldable to be fixed by plugs

self-engaging lock, with base plate 100 x 150 mm

	FG		part no. kg	
with triangular locking	Α	460FUB-RAL9005FS-RW1A	476FUB-RAL9005FS-RW1A	470FUB-RAL9005FS-RW1A
mechanism acc. to DIN 3223		5,6	6,8	7,5
with profile cylinder lock,	Α	460UZB-RAL9005FS-RW1A	476UZB-RAL9005FS-RW1A	470UZB-RAL9005FS-RW1A
three keys incl.		5,8	8,6	9,0

foldable to be fixed by plugs

self-engaging lock, incl. base rosette,

part-no. 470-60, approx. 400 mm below ground

		FC	part no. kg	part no. kg	part no. kg
	with triangular locking mechanism acc. to DIN 3223	Α	460FUHB-RAL9005FS-RW1A 7,9	476FUHB-RAL9005FS-RW1A 9,2	470FUHB-RAL9005FS-RW1A 10,0
	with profile cylinder lock, three keys incl.	Α	460UZHB-RAL9005FS-RW1A 8,1	476UZHB-RAL9005FS-RW1A 10,9	470UZHB-RAL9005FS-RW1A 11,3
^					

Thanks to our **3-step configurator**, you can design your Black-Line posts exactly according to your preferences – from the base color to reflective stripes and the desired reflection class

✓ Customized barriers – configure your individual post


Design your barriers exactly as you wish, choosing colors, reflective stripes, and the reflection class.


✓ Unlimited customization options

Your project, your choice! Select from various glossy or matte coatings, reflective stripes, and the appropriate reflection class

√ Simple, flexible, precise

With our 3-step configurator, you can design your barrier exactly as you envision – quickly and effortlessly





stationary Ø 89 mm Ø 102 mm


	FC	part no. kg	part no. kg
for casting in concrete with ground anchor, total length: approx. 1300 mm	Α	489B-RAL9005FS-RW1A 8,8	491B-RAL9005FS-RW1A 9,5
to be fixed by plugs with base plate 100 x 150 mm	Α	489PB-RAL9005FS-RW1A 6.7	491PB-RAL9005FS-RW1A 9.4

removable


self-engaging lock, incl. base rosette,

with hot-dip galvanized ground sleeve, approx. 400 mm below ground

	FC	part no. kg	part no. kg
with triangular locking	Α	489FB-RAL9005FS-RW1A	491FB-RAL9005FS-RW1A
mechanism acc. to DIN 3223		12,5	14,9
with profile cylinder lock,	А	489ZB-RAL9005FS-RW1A	491ZB-RAL9005FS-RW1A
three keys incl.		11,8	12,8

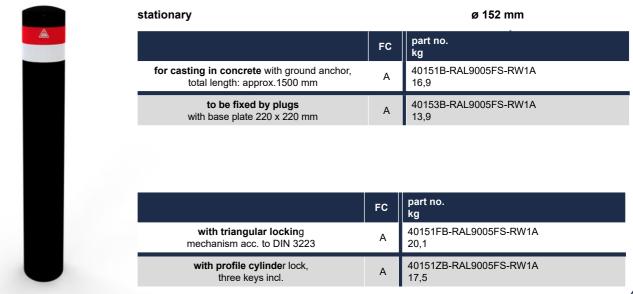

High visibility & optimal safety

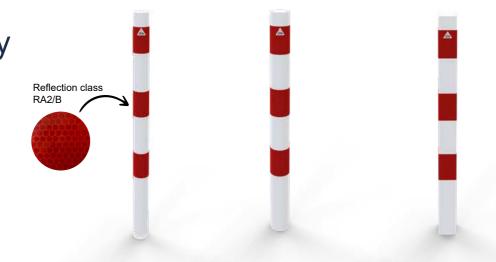

Content

Barrier post


hot-dip galvanized, white coated with red reflective stripes RA2/B

stationary		Ø 60 mm	Ø /6 mm	70 X 70 mm
	FC	part no. kg	part no. kg	part no. kg
for casting in concrete with ground anchor, total length: approx. 1300 mm	Α	460B-R2B 4,9	476B-R2B 7,0	470B-R2B 7,2
to be fixed by plugs with base plate 100 x 150 mm	Α	460PB-R2B 4,0	476PB-R2B 9,1	470PB-R2B 5,6

removable

self-engaging lock, incl. base rosette, with hot-dip galvanized ground sleeve, approx. 400 mm below ground

	FC	1 5 7 7 7	part no. kg	part no. kg
with triangular locking	Α	460FB-R2B	476FB-R2B	470FB-R2B
mechanism acc. to DIN 3223		6,4	12,0	11,5

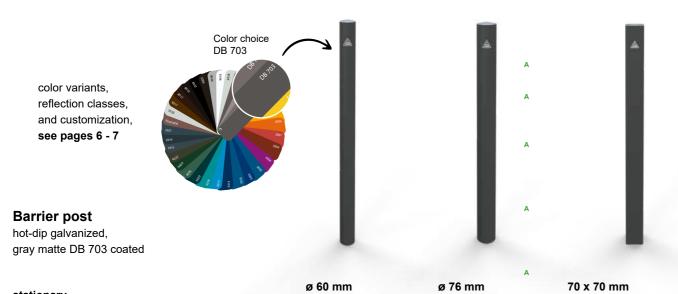

stationary	stationary					
	FC	part no. kg	part no. kg	part no.		
for casting in concrete with ground anchor, total length: approx. 1300 mm	Α	460B-DB703 4,9	476B-DB703 7,0	470B-DB703 7,2		
to be fixed by plugs with base plate 100 x 150 mm	Α	460PB-DB703 4,0	476PB-DB703 9,1	470PB-DB703 5,6		

removabl

self-engaging lock, incl. base rosette,

with hot-dip galvanized ground sleeve, approx. 400 mm below ground

	man not any garranii				
		FC	part no. kg	part no. kg	part no. kg
	with triangular locking mechanism acc. to DIN 3223	Α	460FB-DB703 6,4	476FB-DB703 12,0	470FB-DB703 11,5
•					





Barrier post

hot-dip galvanized, gray matte DB 703 coated with white reflective stripes

stationary		ø 60 mm	ø 76 mm	70 x 70 mm
	FC	part no. kg	part no.	part no. kg
for casting in concrete with ground anchor, total length: approx. 1300 mm	Α	460B-DB703-W1A 4,9	476B-DB703-W1A 7,0	470B-DB703-W1A 7,2
to be fixed by plugs with base plate 100 x 150 mm	Α	460PB-DB703-W1A 4,0	476PB-DB703-W1A 9,1	470PB-DB703-W1A 5,6


removable

460PB

-DB703

self-engaging lock, incl. base rosette, with hot-dip galvanized ground sleeve, approx. 400 mm below ground

	FC	part no. kg	part no. kg	part no. kg
with triangular locking mechanism acc. to DIN 3223	Α	460FB-DB703-W1A	476FB-DB703-W1A	470FB-DB703-W1A

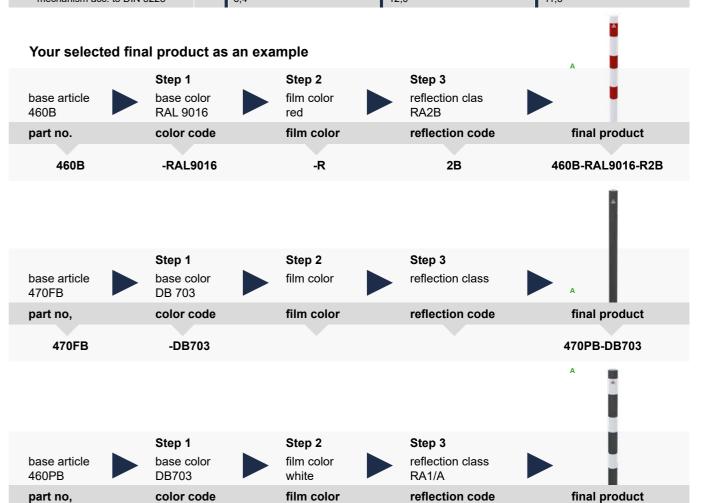

-W

1A

460PB-DB703-W1A

Self-righting barrier post; Resilient but extremely robust. Protects persons and mitigates damage to vehicles.



height 1000 mm Ø 80 mm, PUR, 4 reflecting stripes, including 3 bolts and plugs









height 750 mm Ø 80 mm, PUR, 3 reflecting stripes, including 3 bolts and plugs



height 450 mm
Ø 80 mm, PUR,
2 reflecting stripes,
including 3 bolts and plugs



height 300 mm
Ø 80 mm, PUR,
1 reflecting stripe,
including 3 bolts and plugs


Flexipost red

with white reflecting stripes

height in mm	FC	kg	part no.
1000	A•	1.5	412211
750	A•	1.3	412212
450	Α•	0.9	412214
300	Α	0.7	412215

Flexipost white

with red reflecting stripes

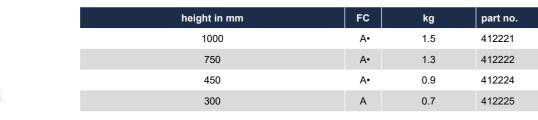

Flexipost black

with white reflecting stripes



height in mm	FC	kg	part no.
1000	A•	1.5	412221BS
750	A•	1.3	412222BS
450	Α	0.9	412284BS
300	Α	0.7	412282BS





Flexipost yellow

Ø 80 mm, PUR, black stripes, including 3 bolts and plugs

	•			
height in mm	FC	kg	part no.	
1000	Α	1.5	412441BG	
750	Α	1.3	412442BG	A
450	Α	0.9	412444BG	



Flexipost black

Ø 80 mm, PUR yellow reflecting stripes, including 3 bolts and plugs

Adapter with eyelet for putting on flexiposts

for chains

height in mm	FC	kg	part no.	
1000	Α	1.5	412221BG	
750	Α	1.3	412222BG	A
450	Α	0.9	412284BG	
300	Α	0.7	412282BG	





	FC	kg	part no.
white	A•	0.1	41222KW
black	A•	0.1	41222KS

Very robust, flexible bollards safe to nudge and run over, for businesses and municipalities. KICKBACK ©

Even if run over at high speed, hardly anything can be seen on the bollard or the vehicle. These bollards improve safe traffic. It saves businesses and municipalities money for costly repairs.

KICKBACK © bollard Ø 60 mm

plastic post 900 mm above ground





With ground plate for plugging down

	FC	kg	part no.
white with red reflecting stripes	A•	2.5	4260B
yellow with black stripes	A•	2.5	4260BG

With ground socket type for casting in concrete

	FC	kg	part no.
white with red reflecting stripes	Α•	4.5	4260HB
yellow with black stripes	A•	4.5	4260HBG

With ground plate for plugging down Quick Release

for quick removal of the **KICKBACK** © **bollards**, incl. locking bolt type 470-426

	FC	kg	part no.
white with red reflecting stripes	Α•	2.5	4261B
yellow with black stripes	A•	2.5	4261BG

If you want to take the post out or drive over it or no barrier is needed, use the quick release plate. The post then can be removed easily and quickly.



Latching pin

for quick release base plate

FC	kg	part no.
Α•	0.1	470-426



Separate ground
ocket of steel, hot-dip
alvanized, length 400 mm

FC	kg	part no.
A•	2.0	4S470-60MH

Set of mounting bolts, galvanized

	part no.
set of mounting bolts type 1, 4 bolts M10 x 80 with plastic plugs for barrier posts with base plate 100 x 150 mm, crash guard angles, protective railings	470-71
set of mounting bolts type 1.2, 8 bolts M10 x 80 with plastic plugs for hoops with base plate 100 x 150 mm	470-712
set of mounting bolts type 2, 4 bolts with fixing anchor M16 x 150 for posts from \emptyset 102 mm, barrier systems, height restriction barriers	470-72
set of mounting bolts type 3, 8 bolts with fixing anchor M16 x 150 for barrier systems, height restriction barriers	470-73
set of mounting bolts type 3, 4 bolts M12 x 100 mm with plastic plugs	470-74



Set of mounting bolts VA

	part no.
set of mounting bolts type 1VA, 3 bolts M10 x 100 VA with plastic plugs for stainless steel posts 4062P	470-76
set of mounting bolts type 1.2VA, 6 bolts M10 x 100 VA with plastic plugs for stainless steel hoops series 449	470-762
set of mounting bolts type 2VA, 3 bolts with fixing anchor M12x 110 VA for stainless steel posts from Ø76 mm	470-77
screw head driver bit T40 for set of mounting bolts type 1	470-75



Extra charge for locking systems

Extra price (respectifly the article number)

	part no.
profile cylinder simultaneously locking (without security card)	+ZGL
profile cylinder with security card, different locking initial order (initial order)	+ZSI
profile cylinder with security card, simultaneously locking (initial order)	+ZSIGL
profile cylinder for master key system with security card different locking (initial order)	+ZHS
profile cylinder for master key system with security card simultaneously locking (initial order)	+ZHSGL
additional key for profile cylinder (without security card)	470-55
additional key for profile cylinder (with security card)	470-55SI
additional key for profile cylinder for master key system (with security card)	470-55SIHS
master key	470-56HS



Content



430-66B

430-10B

430-60B

430-12

430-13

Barrier chain of steel, welded wire thickness 5 mm

	FC	kg	part no.	
galvanized	A•	0.5	430-50	
galvanized and red / white coated packing unit 10 m	A•	0.5	430-50B	

Barrier chain of steel, welded, wire thickness 6 mm

	FC	kg	part no.
galvanized	Α	0.6	430-66
galvanized and red / white coated packing unit 10 m	A•	0.6	430-66B
galvanized and coated yellow / black packing unit 10 m	Α	0.6	430-67B

Barrier chain of steel, unwelded, wire thickness 7 mm

	FC	kg	part no.
galvanized	A•	0.9	430-10
galvanized and red / white coated packing unit 10 m	A•	0.9	430-10B
galvanized and coated yellow / black packing unit 10 m	A•	0.9	430-20B
galvanized and coated acc. to RAL color packing unit 10 m	Α	0.9	430-25B
		A	

Square steel chain, unwelded, wire thickness 6 mm

	FC	kg	part no.
galvanized and coated, please specify RAL color	Α	0.9	430-60B

Chain accessories

Chain accessories		
S-hook	FC	part no.
galvanized	A•	430-11
galvanized and red coated	A•	430-11BR
galvanized and white coated	A•	430-11BW
galvanized and yellow coated	A•	430-11BG
galvanized and black coated	A•	430-11BS
Connecting link		
galvanized	A•	430-09
galvanized and red coated	A•	430-09BR
galvanized and white coated	A•	430-09BW
galvanized and yellow coated	A•	430-09BG
galvanized and black coated	A•	430-09BS
Shackle		
galvanized	A•	430-12
galvanized and red coated	A•	430-12BR
galvanized and white coated	A•	430-12BW
galvanized and yellow coated	A•	430-12BG
galvanized and black coated	A•	430-12BS
Snap hook		
galvanized	A•	430-13
galvanized and red coated	A•	430-13BR
galvanized and white coated	A•	430-13BW
galvanized and yellow coated	A•	430-13BG
galvanized and black coated	A•	430-13BS











430-08W











Plastic barrier chain

6 mm thick

	FC	kg	part no.	
red / white, packing unit 25 m	A•	2.0	430-05	
yellow / black, packing unit 25 m	A•	2.0	430-06	
Plastic connecting link made		А		
6 mm thick		Α		

	FC	part no.
red	A•	430-07R
white	A•	430-07W
yellow	A•	430-07G
blook	۸.	400.070

Plastic hook link

6 mm thick

	FC	part no.
red	Α•	430-08R
white	A•	430-08W
yellow	A•	430-08G
black	A•	430-08S

Plastic barrier chain

8 mm thick

	FC	kg	part no.
red / white, packing unit 25 m	A•	2.5	430-15
yellow / black, packing unit 25 m	Α	2.5	430-30

Plastic connecting link made

8 mm thick

	FC	part no.
red	A•	430-16R
white	A•	430-16W
yellow	A•	430-16G
black	A•	430-16S

Plastic hook link

8 mm thick

	FC	part no.
red	Α•	430-17R
white	A•	430-17W
yellow	A•	430-17G
black	A•	430-17S

56

Ground socket for Ø 60 mm tubes

of round tube, hot-dip galvanized, 400 mm long, with ground anchor

	FC	kg	part no.
for barrier posts with bottom part Ø 60 mm without locking mechanism	A•	2.1	460-10
for removable barrier posts with bottom part Ø 60 mm with our type of locking mechanism	A•	2.1	460-40
for series 460V barrier posts	A•	2.1	460-60

Α

Content

Cover for Ø 60 mm tubes

without locking mechanism,

suitable for ground sockets part-no. 460-10, 460-40 and 460-60 A

	FC	kg	part no.
hot-dip galvanized	A•	0.4	460-20

Cover for Ø 60 mm tubes

with spring-loaded locking mechanism, suitable for ground sockets part-no. 460-40, for opening by multipurpose wrench part-no. 470-40

	FC	kg	part no.
hot-dip galvanized	Α•	0.7	460-21



of round tube, hot-dip galvanized, 400 mm long, with ground anchor

	FC	kg	part no.
for barrier posts with bottom part Ø 76 mm without locking mechanism	Α•	3.2	476-10
for removable barrier posts with bottom part Ø 76 mm with our type of locking mechanism	A•	3.2	476-40
		Α	

without locking mechanism,

Cover for Ø 76 mm tubes

suitable for ground sockets part-no. 476-10 and 476-40

	FC	kg	part no.
hot-dip galvanized	Α•	0.4	476-20

Cover for Ø 76 mm tubes

suitable for ground socket part-no. 476-40,

with spring-loaded locking mechanism for opening by multipurpose wrench part-no. 470-40

	FC	kg	part no.
hot-dip galvanized	A•	0.4	476-21

Ground socket

of square tube 80 x 80 mm, hot-dip galvanized, with ground anchor

	FC	kg	part no.
for barrier post with bottom part 70 x 70 mm without locking mechanism, length 400 mm	Α•	2.9	470.15

Ground socket

of square tube 80 x 80 mm, hot-dip galvanized, with ground anchor

	FC	kg	part no.
for removable barrier post with bottom part 70 x 70 mm with our type of locking mechanism, length 500 mm	A•	3.7	470-10

Cover for square tube 70 x 70 mm

without locking mechanism, suitable for ground sockets, part-no. 470-10 and 470-15

	FC	kg	part no.
hot-dip galvanized	A•	0.7	470-20

Cover for square tube 70 x 70 mm

suitable for ground socket part-no. 470-10,

with spring-loaded locking mechanism for opening by multipurpose wrench part-no. 470-40

	FC	kg	part no.
hot-dip galvanized	Α•	0.8	470-21

Ground socket

with mounting plate 100×150 mm, hole pitch 70×122 mm, 400 mm long, with ground anchor, for fastening all foldable barrier posts of our type, including bolts

	FC	kg	part no.
hot-dip galvanized	Α•	2.3	470-60



Ę



Ground socket

of hot-dip galvanized steel tube, 400 mm long, with two lateral bolt holes

	FC	kg	part no.
Ø 48 mm tubular post	A•	1.6	443-44
Ø 60 mm tubular post	A•	2.1	463-44
Ø 76 mm tubular post	A•	2.6	473-44
		Α.	

Ground socket

of hot-dip galvanized steel tube with arresting mechanism, for \varnothing 60 mm tubular post

300 mm long A• 2.3 463-31 400 mm long A• 2.7 463-41 500 mm long A• 3.2 463-51		FC	kg	part no.
	300 mm long	A•	2.3	463-31
500 mm long A• 3.2 463-51	400 mm long	A•	2.7	463-41
	500 mm long	A•	3.2	463-51

Ground socket

of hot-dip galvanized steel tube with arresting mechanism, for \emptyset 76 mm tubular post

	FC	kg	part no.
300 mm long	A•	3.1	473-31
500 mm long	Α•	4.6	473-51

A s

Steel tube sign posts see catalogue

"Construction equipment -Traffic safety"

Sample for use



Content

The paving stone edging provides a secure and visually appealing enclosure for bollards, signposts, and more. It ensures a clean finish and is easy to install.

400 x 400 x 80 mm, with central hole anthracite

Paving stone edging

consisting of 4 individual stones

diameter of center hole in mm	FC	kg	part no.
Ø 150 mm	Α	27.0	4F150A
Ø 200 mm	Α	26.0	4F200A

ey

center hole diameter in mm	FC	kg	part no.
Ø 150 mm	Α	27.0	4F150AG
Ø 200 mm	Α	26.0	4F200AG



Ground socket for Ø 48 mm tubular post

of grey-cast iron, with threaded and tightening ring

	FC	kg	part no.
300 mm long	A•	3.5	443-61



Steel wrench

	FC	kg	part no.
hot-dip galvanized for Ø 48 mm	A•	1.8	443-68



Ground socket for Ø 60 mm tubular post

of grey-cast iron, with threaded and tightening ring

	FC	kg	part no.
300 mm long	A•	5.0	463-61
500 mm long	Α•	7.0	463-62
		Α	
		Α	



Ground socket for Ø 76 mm tubular post

of grey-cast iron, with threaded and tightening ring

	FC	kg	part no.
300 mm long	A•	7.0	473-61
500 mm long	A•	9.5	473-62
		Α	
		Α	



Multipurpose wrench of grey-cast iron, suitable for

grey-cast iron ground sockets Ø 60 mm and Ø 76 mm, including square for blind plug

FC	kg	part no.
Α•	5.2	463-68



	diameter in mm	FC	kg	part no.
	ø 48	A•	0.1	443-65
threaded ring	ø 60	A•	0.1	463-65
	ø 76	A•	0.1	473-65
	ø 48	A•	0.8	443-66
tightening ring	ø 60	A•	0.8	463-66
	ø 76	Α	0.8	473-66
	ø 48	A•	0.8	443-67
blank plug	ø 60	A•	0.8	463-67
	ø 76	A•	0.8	473-67




60


Grey-cast multipurpose wrench

acc. to DIN 3223, for all barrier posts with triangular locking mechanism and for opening the covers

	FC	kg	part no.
galvanized	Α•	0.4	470-40










and a	

Triangular standard wrench

acc. to DIN 3223, hand wrench for opening all barrier posts with triangular lock

	FC	kg	part no.
galvanized	A•	0.2	470-50





Triangular socket wrench acc. to DIN 3223

	FC	kg	part no.
galvanized	A•	0.2	470-30

Film 100 mm x 200 mm for tube Ø 60 mm 430-19RRA2C 430-19RRA1 430-19RRA2B red white 430-19WRA1 430-19WRA2B 430-19WRA2C yellow 430-19GRA1 430-19GRA2B 430-19GRA2C 430-19G black 430-19SRA1 430-19S



Square socket wrench, 6 mm type 4027

	FC	kg	part no.
for litter bin	Α	0.2	4037

Film 110 mm x 285 mm for tube Ø 89 mm / square tube 70 x 70 mm 430-18RRA1 430-18RRA2B 430-18RRA2C red 430-18WRA2C white 430-18WRA1 430-18WRA2B 430-18GRA1 430-18GRA2B 430-18GRA2C 430-18G yellow black 430-18SRA1 430-18S



Triangular socket wrench, 8 mm

for litter bin

	A				
	FC	kg	part no.		
galvanized	Α•	0.2	4038		





Triangular wrench, 8 mm

handy wrench for opening the litter bins

FC	kg	part no.
Α	0.1	4039

Film 110 mm x	350 mm for tube Ø 108 mm			
red	430-183RRA1	430-183RRA2B	430-183RRA2C	
white	430-183WRA1	430-183WRA2B	430-183WRA2C	
yellow	430-183GRA1	430-183GRA2B	430-183GRA2C	430-183G
black	430-183SRA1			430-183S



eyelets, galvanized part no. one eyelet screw-fastened part no. +1 two eyelets screw-fastened part no. +2 one eyelet for screw fastening by M8 threaded pin (specify tube diameter) 470-01 two eyelets for screw fastening by M8 threaded pin (specify tube diameter) 470-02

430-184RRA1 430-184RRA2B 430-184RRA2C red white 430-184WRA1 430-184WRA2B 430-184WRA2C 430-184GRA2B 430-184GRA2C 430-184G yellow 430-184GRA1 430-184SRA1 430-184S black

Film 110 mm x 500 mm for tube Ø 152 mm / square tube 100 x 100 mm

Film 110 mm x 620 mm for tube Ø 193 mm

Ground rosette for post

	FC	kg	part no.
\emptyset 76 mm, for screw-fastening, galvanized and coated	Α	1.3	476RB
Ø 82 mm, for screw-fastening, galvanized and coated	Α	1.3	485RB

Film 110 mm x	890 mm for tube Ø 275 mm				
red	430-187RRA1	430-187RRA2B	430-187RRA2C		
white	430-187WRA1	430-187WRA2B	430-187WRA2C		
yellow	430-187GRA1	430-187GRA2B	430-187GRA2C	430-187G	
black	430-187SRA1			430-187S	

430-186RRA2B

430-186WRA2B

430-186GRA2B

430-186RRA2C

430-186WRA2C

430-186GRA2C

430-186G

430-186S



	FC	kg	part no.
\emptyset 76 mm, for screw-fastening, galvanized and coated	Α	1.3	478RB
Ø 89 mm, for screw-fastening, galvanized and coated	Α	1.3	4084RB
		Δ	

If not otherwise mentioned, we use following film for our posts:

430-186RRA1

430-186WRA1

430-186GRA1

430-186SRA1

color: red	RA1/A
white	RA1/A
yellow	non reflective
black	non reflective

red white

yellow

black

Work site protection

Steel island post robust, visible, secure.

Maximum pedestrian protection on traffic islands. The sturdy steel post features a thick-walled tube and reflective film (RA2/B) for optimal visibility.

Easy to install anchor, insert signpost and secure ideal for traffic signs (e.g., VZ 222-20).

Island post

made of steel, Ø 168 mm, with round base plate for anchoring, designed to hold signposts Ø 60 mm, hot-dip galvanized



total length: 646 mm

total length: 846 mm

	FC	kg	part no.	kg	part no.
coated white with 2 red stripes type RA2/B	В	23,5	44170B	30,5	44171B
blue coated RAL5005 with 2 white stripes type RA2/B	В	23,5	44170BB	30,5	44171BB
black coated with 2 yellow stripes type RA2/B	В	23,5	44170BG	30,5	44171BG

Cover for steel island posts

for fixed to the island post using the screws provided, hot-dip galvanized



	FC	kg	part no.
white coated	Α	0,4	44170DB
blue coated	Α	0,4	44170DBB
black coated	Α	0,4	44170DBG



Sturdy ground anchor

for casting in concrete, for island posts type 44170/44171, incl. 4 x mounting screws M10x2

	FC	kg	part no.
hot-dip galvanized	Α	2,4	44170-60

Efficient parking control – we have the solution!

Car-park barriers

Our parking barriers ensure safety and order in parking areas



















Car-park barriers • Holding device for parking signage • Park and guide barrier Recycling bollards



Content

Passage and car-park barriers

square tube 70 x 70 mm, with lateral round tube hoops, total width: approx. 800 mm, above ground: 900 mm

471ZB

470-10

removable with triangular locking mechanism acc. to DIN 3223,


to ground socket part no. 470-10, approx. 500 mm below ground

	FC	kg	part no.
hot-dip galvanized, with red reflecting stripes	В	14.5	471F
hot-dip galvanized and white coated with	В•	14.5	471FB

removable with Euro profile cylinder lock, three keys,

with ground socket part no. 470-10, approx. 500 mm below ground

	FC	kg	part no.
hot-dip galvanized, with red reflecting stripes	В	16.3	471Z
hot-dip galvanized and white coated with red reflecting stripes	В•	16.3	471ZB



Assembly instructions

Always pay attention to adequate drainage for removable posts (provide gravel fill). Do not install in standing water.

separate ground socket

	FC	kg	part no.
for casting in concrete	A•	3.7	470-10



It is recommended to install a second ground socket (away from blocked terrain). The post locks itself without key operation, and can not be stolen.



square tube 70 x 70 mm, with lateral round tube hoops, total width: approx. 800 mm, above ground: 900 mm



 $\begin{tabular}{ll} \textbf{foldable with triangular locking mechanism} & acc. to DIN 3223, \\ \textbf{self-engaging lock} \end{tabular}$

to be fixed by plugs

with base plate or for mounting to ground socket part no. 470-60

	FC	kg	part no.
hot-dip galvanized, with red reflecting stripes	В	10.6	471FU
hot-dip galvanized and white coated with red reflecting stripes	В•	10.6	471FUB

foldable with Euro profile cylinder lock, three keys, self-engaging lock

to be fixed by plugs

with base plate or for mounting to ground socket part no. 470-60

	FC	kg	part no.
hot-dip galvanized, with red reflecting stripes	В•	12.1	471UZ
hot-dip galvanized and white coated with red reflecting stripes	В•	12.1	471UZB



471UZ

Ground socket

(order together if you want to cast the barrier in concrete)

	FC	kg	part no.
for casting in concrete	Α•	2.3	470-60



Car-park barriers prevent parking between lots and provide protection from theft and illegal parking

66

Content



Car-park barrier

square tube 70 x 70 mm, with lateral round tube hoops, total width: approx. 800 mm, above ground: 500 mm



4709UZB

470-60

foldable with triangular locking mechanism acc. to DIN 3223, self-engaging lock

to be fixed by plugs

with base plate 100 x 150 mm or for mounting to ground socket part no. 470-60

	FC	kg	part no.
hot-dip galvanized with red reflecting stripes	Α	8.6	4709FU
hot-dip galvanized and white coated with reflecting stripes	Α•	8.6	4709FUB



foldable with Euro profile cylinder lock, three keys, self-engaging lock

to be fixed by plugs

with base plate 100 x 150 mm or for mounting to ground socket part no. 470-60

	FC	kg	part no.
hot-dip galvanized with red reflecting stripes	Α•	9.1	4709UZ
hot-dip galvanized and white coated with reflecting stripes	A•	9.1	4709UZB

Ground socket

(order together if you want to cast the barrier in concrete)

	FC	kg	part no.
for casting in concrete	Α•	2.3	470-60





Crash-proof barrier post

flexible to impact and thrust, square tube 70 x 70 mm, above ground: 500 mm, pass-over height: approx. 95 mm

 $\textbf{foldable, with Euro profile cylinder lock} \ \text{three keys, self-engaging lock}$

to be fixed by plugs

with base plate Ø 200 mm or for mounting to ground socket part no. 470-60

	FC	kg	part no.	
hot-dip galvanized and red coated with white	Α	8.0	40215UZB	



40215UZB

for more info scan the QR code



Crash-proof car-park barrier

flexible to impact and thrust, square tube 70 x 70 mm, above ground: 500 mm, pass-over height: approx. 95 mm, with lateral round tube hoops, total width: approx. 800 mm

foldable with Euro profile cylinder lock

three keys, self-engaging lock

to be fixed by plugs

with base plate Ø 200 mm or for mounting to ground socket part no. 470-60

	FC	kg	part no.
hot-dip galvanized and red coated with white reflecting stripes	A•	10.8	40220UZB

Ground socket

(order together if you want to cast the barrier in concrete)

	FC	kg	part no.
for casting in concrete	Α•	2.3	470-60



68 69

for more info scan the QR code



Car-park barrier foldable

square tube 70 x 70 mm, with lateral round tube hoops, total width: approx. 800 mm, above ground: 500 mm, self-engaging lock

40770

40771B




round cylinder foldable with round cylinder three keys

to be fixed by plugs

with base plate 100 x 150 mm

	FC	kg	part no.
hot-dip galvanized with red reflecting stripes	Α•	7.5	40770
hot-dip galvanized and white coated with red reflecting stripes	A•	7.5	40770B

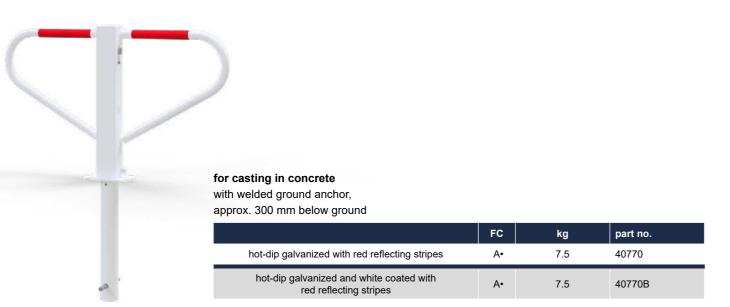




Car-park barrier foldable

square tube 70 x 70 mm, with lateral round tube hoops, total width: approx. 800 mm, above ground: 500 mm, self-engaging lock



with base plate 100 x 150 mm

•			
	FC	kg	part no.
hot-dip galvanized with red reflecting stripes	A•	7.5	40772
hot-dip galvanized and white coated with red reflecting stripes	A•	7.5	40772B



40772B

for casting in concrete

with welded ground anchor, approx. 300 mm below ground

	FC	kg	part no.	
hot-dip galvanized with red reflecting stripes	Α	8,8	40773	
hot-dip galvanized and white coated with red reflecting stripes	Α	8.8	40773B	

40773B



Handy triangular wrench 8 mm

for barrier post, car-park barriers

	FC	kg	part no.
galvanized	A•	0.1	4039

Work site protection

Car-park barrier, foldable

with lateral round tube hoops and a one-piece base plate, total width: approx. 800 mm, total height: approx. 500 mm

round tube Ø 60 mm,



for more info scan the QR code





foldable with Euro profile cylinder lock

three keys, self-engaging lock

	FC	kg	part no.
hot-dip galvanized with red reflecting stripes including fastening material	A•	8.3	40660







Car-park barriers prevent parking between lots and provide protection from theft and illegal parking.





Car-park barrier

made of thick-walled round steel tube \emptyset 33.7 x 2.5 mm, height: approx. 450 mm, width: approx. 850 mm, extremely flat when folded down, approx. 45 mm high




foldable with padlock, three keys, including fastening material

	FC	kg	part no.
hot-dip galvanized with red reflecting stripes	Α•	5.5	472V

472V

foldable with Euro profile cylinder lock, three keys, self-engaging lock, locking and unlocking outside the dirt zone, including fastening material.



472Z



1 set (3 pieces) anchors for casting in concrete

FC	kg	part no.
Α•	0.1	472A



foldable with Euro profile cylinder lock, three keys and continuous base plate, self-engaging lock, locking and unlocking outside the dirt zone, including fastening material

	FC	kg	part no.
hot-dip galvanized with red reflecting stripes	A•	7.8	472ZP

472ZP

73

Work site protection



Holding device for parking signage 2 support posts steel tube 40 mm x 40 mm x 2.0 mm, galvanized, with screwed

parking signage (inclusive)

height above: ground 350 mm, total width: approx. 520 mm



Content

	FC	kg	part no.
for casting in concrete, total height: 500 mm	Α•	3.1	4045
to be fixed by plugs, total height: 350 mm	A•	4.0	4045P



Round hoops for parking sign

stainless steel Ø 48.3 mm x 2.5 mm, with welded license plate holder

height above ground: 800 mm, total width: approx. 650 mm



	FC	kg	part no.
for casting in concrete	В•	10.9	449-66SE
to be fixed by plugs	В•	9.9	449-66PSE







Park and guide barrier made of recycled material

with reflectors, 1170 mm x 150 mm x 50 mm, with 3 bolts and plugs

	FC	kg	part no.
white	A•	2.3	412202SW
yellow	A•	2.3	412202SO

Drive-in rod

of 40 mm T-section, with drive-in tip, **total length:** 1200 mm

	FC	kg	part no.
hot-dip galvanized	A•	3.4	4043

Drive-in rod

of 40 mm T-section, with drive-in tip, total length: 1200 mm for sign posting car parks, with sign board 110 x 520 mm $\,$

	FC	kg	part no.	
hot-dip galvanized	A•	4.0	4044	

4043

Bollards made of recycled plastic material for digging in or casting in concrete.

Our bollards made of recycled plastic offer a durable and sustainable solution for various applications. They are ideal for embedding in the ground or setting in concrete and stand out for their stability and weather resistance.

By using recycled plastic, you actively contribute to environmental protection while benefiting from a high-quality product that combines functionality and sustainability.

Recycling-material post

square post 140 x 140 mm, total length: 1400 mm

	FC	kg	part no.
bollards without milled groove and reflectors, color: black	Α•	17.0	4014140
bollards with 2 milled grooves 15 mm wide and 2 reflecting bands, red on top, white at bottom	A•	17.0	4014141



Recycling-material post

hemispherical head Ø 150 mm (hollow section), total length: 1500 mm

	FC	kg	part no.
bollard without milled grooves and reflecting bands, color: brown	A•	14.0	4014150
bollards with 2 milled grooves 15 mm wide and 2 reflecting bands, red on top, white at bottom	A•	14.0	4014151



Aesthetics and functionality combined.

Ornamental bollards

Ornamental bollards designed for urban environments provide elegant security while seamlessly blending into the cityscape.





Ornamental bollards made of steel tube Ø 60 - 193 mm • Aluminium bollards • Ornamental bollards of square tube

Ornamental bollards

Barrier posts





Ø 60 mm

series 468

page 81

Ø 76 mm

series 4077

page 84

Ø 89 mm

series 487

page 87

Ø 102 mm

series 494

page 88

78

Barrier gates

Outdoor equipment

Work site protection







Ø 60 mm / Ø 82 mm

Ø 102 mm

series 464 / 482 / 4092

page 81 / 86 / 89

Ø 152 mm / Ø 193 mm

series 40155 / 40195

page 90

Ø 100 mm

series 40101

page 91

Ø 120 mm

series 40120 / 40121

page 91

page 85





Ø 82 mm

series 484

page 86






Content

Ø 89 mm

series 488

page 87



Ø 152 mm / Ø 193 mm series 40156 / 40196 page 90







series 495 page 94 / 95



Ø 76 / 100 mm series 479 page 83



series 40102 page 92



page 92







Ø 140 mm series 40140 page 99



70 x 70 mm series 473 page 98


70 x 70 mm

series 473B

page 98



series 4073 page 96



70 x 70 mm series 40731 page 96




series 4071

scan the QR code

for more info

100 x 100 mm series 4075 page 97



Color Selection for Barrier Program color variants, reflection classes, and customization, see pages 6 - 7



Ornamental bollard

of steel tube Ø 60 mm,

approx. 950 mm above ground, hot-dip galvanized and coated

color:

series 465: RAL 7016 **series 466**: RAL 7016



stationary

	FC	kg	part no.	part no.
for casting in concrete with ground anchor, total length: approx. 1300 mm	Α	5.0	465B	466B
to be fixed by plugs with base plate 100 x 150 mm	Α	4.0	465PB	466PB

removable

self-engaging lock, incl. ground rosette, with hot-dip galvanized ground socket part-no. 460-40, approx. 400 mm below ground

	FC	kg	part no.	part no.
with triangular locking mechanism, acc. to DIN 3223	Α	7.0	465FB	466FB
with Euro profile cylinder lock, three keys incl.	Α	8.0	465ZB	

foldable to be fixed by plugs

self-engaging lock,

with base plate 100 x 150 mm

	FC	kg	part no.	part no.
with triangular locking mechanism, acc. to DIN 3223	Α	6.0	465FUB	466FUB
with Euro profile cylinder lock, three keys incl.	Α	7.0	465UZB	

foldable for casting in concrete

self-engaging lock, with hot-dip galvanized ground socket part-no. 470-60, approx. 400 mm below ground

	FC	kg	part no.	part no.
with triangular locking mechanism, acc. to DIN 3223	Α	8.0	465FUHB	466FUHB
with Euro profile cylinder lock, three keys incl.	Α	9.0	465UZHB	




Ornamental bollard

of steel tube Ø 60 mm,

approx. 950 mm above ground, hot-dip galvanized and coated

color:

series 464: DB 703 series 468: RAL 7016

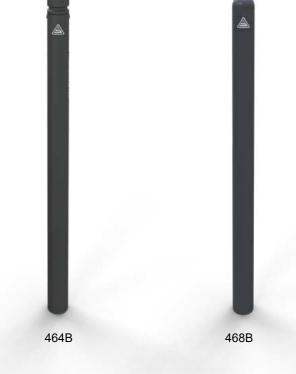

stationary

	FC	kg	part no.	part no.
for casting in concrete with ground anchor, total length: approx. 1300 mm	Α	5.0	464B	468B
to be fixed by plugs with base plate 100 x 150 mm	Α	4.0	464PB	468PB

emovable

self-engaging lock, incl. ground rosette, with hot-dip galvanized ground socket part-no. 460-40, approx. 400 mm below ground

	FC	kg	part no.	part no.
with triangular locking mechanism, acc. to DIN 3223	Α	7.0	464FB	468FB
with Euro profile cylinder lock, three keys incl.	Α	8.0	464ZB	

foldable to be fixed by plugs

self-engaging lock,

with base plate 100 x 150 mm

	FC	kg	part no.	part no.
with triangular locking mechanism, acc. to DIN 3223	Α	6.0	464FUB	468FUB
with Euro profile cylinder lock, three keys incl.	Α	7.0	464UZB	

foldable for casting in concrete

self-engaging lock, with hot-dip galvanized ground socket part-no. 470-60, approx. 400 mm below ground

	FC	kg	part no.	part no.
with triangular locking mechanism, acc. to DIN 3223	Α	8.0	464FUHB	468FUHB
with Euro profile cylinder lock, three keys incl.	Α	9.0	464UZHB	



Ornamental bollard

of steel tube Ø 76 mm,

approx. 950 mm above ground, hot-dip galvanized and coated

series 474: RAL 7016 series 475: RAL 7016



stationary

	FC	kg	part no.	part no.
for casting in concrete with ground anchor, total length: approx. 1300 mm	Α	6.5	474B	475B
to be fixed by plugs with base plate 100 x 150 mm	Α	5.5	474PB	475PB

self-engaging lock, incl. ground rosette, with hot-dip galvanized ground socket part-no. 476-40, approx. 400 mm below ground

	FC	kg	part no.	part no.
with triangular locking mechanism, acc. to DIN 3223	Α	11.5	474FB	475FB
with Euro profile cylinder lock, three keys incl.	Α	11.5	474ZB	475ZB

foldable to be fixed by plugs

self-engaging lock,

with base plate 100 x 150 mm

	FC	kg	part no.	part no.
with triangular locking mechanism, acc. to DIN 3223	Α	7.0	474FUB	475FUB
with Euro profile cylinder lock, three keys incl.	Α	9.0	474UZB	475UZB

foldable for casting in concrete

self-engaging lock, with hot-dip galvanized ground socket part-no. 470-60, approx. 400 mm below ground

		FC	kg	part no.	part no.
with triangular locking me	chanism, acc. to DIN 3223	Α	9.5	474FUHB	475FUHB
with Euro profile cylind	er lock, three keys incl.	Α	11.5	474UZHB	475UZHB



Ornamental bollard

of steel tube Ø 76 mm,

approx. 950 mm above ground, hot-dip galvanized and coated

color:

series 478: RAL 7016 series 479: RAL 7016



stationary

	FC	kg	part no.	part no.
for casting in concrete with ground anchor, total length: approx. 1300 mm	Α	7.5	478B	479B
to be fixed by plugs with base plate 100 x 150 mm	Α	6.5	478PB	479PB

self-engaging lock, incl. ground rosette, with hot-dip galvanized ground socket part-no. 476-40, approx. 400 mm below ground

	FC	kg	part no.	part no.
with triangular locking mechanism, acc. to DIN 3223	Α	12.0	478FB	479FB

foldable to be fixed by plugs

self-engaging lock,

with base plate 100 x 150 mm


	FC	kg	part no.	part no.
with triangular locking mechanism, acc. to DIN 3223	Α	8.0	478FUB	479FUB

foldable for casting in concrete,

self-engaging lock, with hot-dip galvanized ground socket part-no. 470-60, approx. 400 mm below ground

	FC	kg	part no.	part no.
with triangular locking mechanism, acc. to DIN 3223	Α	10.5	478FUHB	479FUHB







stationary

	FC	kg	part no.	part no.	part no.
for casting in concrete with ground anchor, total length: approx. 1300 mm	Α	6.5	4077B	477B	4074B
to be fixed by plugs with base plate 100 x 150 mm	А	5.5	4077PB	477PB	4074PB

self-engaging lock, incl. ground rosette, with hot-dip galvanized ground socket part-no. 476-40, approx. 400 mm below ground

	FC	kg	part no.	part no.	part no.
with triangular locking mechanism, acc. to DIN 3223	Α	11.5	4077FB	477FB	4074FB
with Euro profile cylinder lock, three keys incl.	Α	11.5		477ZB	

foldable to be fixed by plugs

self-engaging lock,

with base plate 100 x 150 mm

	FC	kg	part no.	part no.
with triangular locking mechanism, acc. to DIN 3223	Α	7.0	4077FUB	477FUB
with Euro profile cylinder lock, three keys incl.	А	9.0		477UZB

foldable for casting in concrete

self-engaging lock, with hot-dip galvanized ground socket part-no. 470-60, approx. 400 mm below ground

	FC	kg	part no.	part no.
with triangular locking mechanism, acc. to DIN 3223	Α	9.5	4077FUHB	477FUHB
with Euro profile cylinder lock, three keys incl.	Α	11.5		477UZHB



Ornamental bollard

of steel tube Ø 82 mm,

approx. 900 mm above ground, hot-dip galvanized and coated

series 480: RAL 7016 series 481: RAL 7016



481B

stationary

	FC	kg	part no.	part no.
for casting in concrete with ground anchor, total length: approx. 1300 mm	Α	9.5	480B	481B
to be fixed by plugs with base plate 100 x 150 mm	Α	8.5	480PB	481PB

self-engaging lock, incl. ground rosette, with hot-dip galvanized ground socket part-no. 470-10, approx. 400 mm below ground

	FC	kg	part no.	part no.
with triangular locking mechanism, acc. to DIN 3223	Α	7.0	480FB	481FB
with Euro profile cylinder lock, three keys incl.	Α	8.0	480ZB	

foldable to be fixed by plugs

self-engaging lock,

with base plate 100 x 150 mm

	FC	kg	part no.	part no.
with triangular locking mechanism, acc. to DIN 3223	Α	6.0	480FUB	481FUB
with Euro profile cylinder lock, three keys incl.	Α	7.0	480UZB	

foldable for casting in concrete

self-engaging lock, with hot-dip galvanized ground socket part-no. 470-60, approx. 400 mm below ground

	FC	kg	part no.	part no.
with triangular locking mechanism, acc. to DIN 3223	Α	8.0	480FUHB	481FUHB
with Euro profile cylinder lock, three keys incl.	Α	9.0	480UZHB	



barrier posts also available with eyelets - add the following to the part-no.: +1 for one or +2 for 2 eyelets, accessories see page 62







Ornamental bollard

of round steel tube Ø 82 mm,

approx. 900 mm above ground, hot-dip galvanized and coated

colo

series 482: DB 703 series 484: RAL 9005 matt series 485: RAL 9005 matt

stationary

	FC	kg	part no.	part no.	part no.
for casting in concrete with ground anchor, total length: approx. 1300 mm	Α	9.5	482B	484B	485B
to be fixed by plugs with base plate 100 x 150 mm	Α	8.5	482PB	484PB	485PB

482B

484B

removable

self-engaging lock, incl. ground rosette, with hot-dip galvanized ground socket part-no. 476-40, approx. 400 mm below ground

	FC	kg	part no.	part no.	part no.
with triangular locking mechanism, acc. to DIN 3223	Α	13.0	482FB	484FB	485FB
with Euro profile cylinder lock, three keys incl.	Α	13.0	482ZB	484ZB	485ZB

foldable to be fixed by plugs

self-engaging lock,

with base plate 100 x 150 mm

	FC	kg	part no.	part no.	part no.
with triangular locking mechanism, acc. to DIN 3223	Α	9.0	482FUB	484FUB	485FUB
with Euro profile cylinder lock, three keys incl.	Α	10.0	482UZB	484UZB	485UZB

foldable for casting in concrete

self-engaging lock, with hot-dip galvanized ground socket part-no. 470-60, approx. 400 mm below ground

	FC	kg	part no.	part no.	part no.
with triangular locking mechanism, acc. to DIN 3223	Α	11.0	482FUHB	484FUHB	485FUHB
with Euro profile cylinder lock, three keys incl.	Α	12.5	482UZHB	484UZHB	485UZHB



	FC	kg	part no.	part no.	part no.
for casting in concrete with ground anchor, total length: approx. 1300 mm	Α	8.3	487B	488B	4084B
to be fixed by plugs with base plate 100 x 150 mm	Α	8.3	487PB	488PB	4084PB

emovable

Content

485B

with triangular locking mechanism acc. to DIN 3223, self-engaging lock, with hot-dip galvanized ground socket part-no. 470-10

	FC	kg	part no.	part no.	part no.
with triangular locking mechanism, acc. to DIN 3223	Α	12.0	487FB	488FB	4084FB

Ornamental bollard - classic elegance and safety



496B



	FC	kg	part no.	part no.	part no.
for casting in concrete with ground anchor, total length: approx. 1300 mm	Α	9.5	494B	492B	4091B
to be fixed by plugs with base plate 100 x 150 mm	А	9.5	494PB	492PB	4091PB

removable

with triangular locking mechanism acc. to DIN 3223, self-engaging lock, with hot-dip galvanized ground socket part-no. 470-10

	FC	kg	part no.	part no.	part no.
with triangular locking mechanism, acc. to DIN 3223	Α	13.8	494FB	492FB	4091FB

Style bollards – a perfect blend of design and stability





Ornamental bollard

of steel tube Ø 102 mm,

approx. 950 mm above ground, hot-dip galvanized and coated

colo

series 4092: DB 703 series 496: RAL 7016

stationary

	FC	kg	part no.	part no.
for casting in concrete with ground anchor, total length: approx. 1300 mm	Α	9.5	4092B	496B
to be fixed by plugs with base plate 100 x 150 mm	Α	9.5	4092PB	496PB

4092B

emovable

self-engaging lock, incl. ground rosette, with hot-dip galvanized ground socket part-no. 470-10, approx. 500 mm below ground

	FC	kg	part no.	part no.
with triangular locking mechanism, acc. to DIN 3223	Α	13.8	4092FB	496FB
with Euro profile cylinder lock, three keys incl.	Α	12.8	4092ZB	496ZB

Flexibility and customization

Our ornamental bollards offer versatile customization options to meet a wide range of requirements.

Additional features provide even more flexibility, whether through special mounting options or enhanced security solutions.

The bollards can also be individually customized in color to blend harmoniously into any environment. Explore the various configuration options and choose the ideal solution for your project.



Work site protection

Ornamental bollard

of steel tube, conical Ø 102 / 76 mm, with decorative cap, approx. 900 mm above ground, total length: 1300 mm,

40102B

hot-dip galvanized and coated (RAL 7016)



Content

The beauty of this bollards is simple classic shape, which is attractive both in historical city centers and in modern environments.

stationary

	FC	kg	part no.
for casting in concrete with ground anchor	Α	8.0	40102B
to be fixed by plugs with base plate Ø 180 mm	Α	7.5	40102PB

removable

self-engaging lock, with hot-dip galvanized ground socket part-no. 470-10, approx. 500 mm below ground

	FC	kg	part no.
with triangular locking mechanism acc. to DIN 3223	Α	13.0	40102FB

Ornamental bollard

of steel tube, conical Ø 168 / 96 mm, with decorative cap, approx. 750 mm above ground, total length: 1300 mm, hot-dip galvanized and coated (RAL 8019)

stationary

	FC	kg	part no.
for casting in concrete with ground anchor	Α	8.0	40168B
to be fixed by plugs with base plate Ø 180 mm	Α	7.5	40168PB

self-engaging lock, with hot-dip galvanized ground socket part-no. 470-10, approx. 500 mm below ground

	FC	kg	part no.
with triangular locking mechanism acc. to DIN 3223	Α	13.0	40168FB



barrier posts also available with eyelets - add the following to the part-no.: +1 for one or +2 for 2 eyelets, accessories see page 62

color variants, reflection classes, and customization, see pages 6 - 7







Ornamental bollard

steel tube Ø 108 mm, with decorative rings, hot-dip galvanized and coated (RAL 7016)

		1100 mm	1300 mm
	FC	part no. kg	part no. kg
for casting in concrete with ground anchor	Α	4971B 11.0	497B 12.0
to be fixed by plugs with base plate Ø 180 mm	Α	4971PB	497PB

height above

total length:

ground: 750 mm

height above

total length:

ground: 950 mm

removable

self-engaging lock, with hot-dip galvanized ground socket part-no. 470-10, approx. 500 mm below ground

	FC	part no. kg	part no. kg
with triangular locking mechanism acc. to DIN 3223	Α	4971FB 16.0	497FB 17.0



Ornamental bollard

of steel tube Ø 140 mm, with aluminum ball and chain eyelets, approx. 950 mm above ground, total length: 1150 mm, hot-dip galvanized and coated (DB 703)

stationary

	FC	kg	part no.
for casting in concrete with ground anchor	Α	15.0	40140B-2
to be fixed by plugs with base plate Ø 255 mm	A	12.5	40140PB-2

removable

self-engaging lock, with hot-dip galvanized ground socket part-no. 40140-10, approx. 350 mm below ground

	FC	kg	part no.
with triangular locking mechanism acc. to DIN 3223	Α	23.0	40140FB-2



Stainless steel

Ornamental bollard

of steel tube Ø 152 mm, approx. 950 mm above ground, hot-dip galvanized and coated (DB 703)





Content

stationary

	FC	kg	part no.	part no.
for casting in concrete with ground anchor	Α	14.5	40155B	40156B
to be fixed by plugs with base plate	Α	14.5	40155PB	40156PB

emovable

self-engaging lock, incl. ground rosette, with hot-dip galvanized ground socket part-no. 470-10, approx. 500 mm below ground

	FC	kg	part no.	part no.
with triangular locking mechanism, acc. to DIN 3223	Α	21.5	40155FB	40156FB
with Euro profile cylinder lock, three keys incl.	Α	21.0	40155ZB	

Ornamental bollard

of steel tube Ø 193 mm, approx. 950 mm above ground, hot-dip galvanized and coated (DB 703)



stationary

	FC	kg	part no.	part no.
for casting in concrete with ground anchor	Α	24.0	40195B	40196B
to be fixed by plugs with base plate	Α	24.0	40195PB	40196PB

removable

self-engaging lock, incl. ground rosette, with hot-dip galvanized ground socket part-no. 470-10, approx. 500 mm below ground

	FC	kg	part no.	part no.
with triangular locking mechanism, acc. to DIN 3223	Α	30.5	40195FB	40196FB
with Euro profile cylinder lock, three keys incl.	Α	29.0	40195ZB	

Bollard of thick-walled aluminium

Ø 100 mm, 8 mm wall thickness, with decorative groove, approx. 950 mm above ground, bottom part made of hot-dip galvanized steel tube, coated (RAL 7016)





stationary

	FC	kg	part no.
for casting in concrete with ground anchor	Α	9.0	40101B
to be fixed by plugs with base plate Ø 180 mm	Α	8.0	40101PB

removable

self-engaging lock, with hot-dip galvanized ground socket part-no. 470-10, approx. 500 mm below ground

	FC	kg	part no.
with triangular locking mechanism, acc. to DIN 3223	Α	13.0	40101FB

Bollard of thick-walled aluminium

Ø 120 mm, 8 mm wall thickness, with decorative groove, anthracite grey RAL 7016 coated, bottom part made of hot-dip galvanized steel tube



stationary

autonia y		1100 mm	1300 mm
	FC	part no. kg	part no. kg
for casting in concrete with ground anchor	Α	40120B 9.0	40121B 10.5
to be fixed by plugs with base plate Ø 180 mm	Α	40120PB 8.0	40121PB 9.5

height above

overall height:

ground:

750 mm,

movable

self-engaging lock, with hot-dip galvanized ground socket part-no. 470-10, approx. 500 mm below ground

	FC	part no. kg	part no. kg
with triangular locking mechanism, acc. to DIN 3223	Α	40120FB 14.5	40121FB 16.0



color variants, reflection classes, and customization, see pages 6 - 7



height above

overall height:

ground:

950 mm,

stationary, for casting in concrete

approx. 400 mm below ground

with ground anchor, total length: approx. 1300 mm

Chain eyelets

without eyelet

with 1 eyelet

with 2 eyelets

Chain eyelets

without eyelet

with 1 eyelet

with 2 eyelets

with hot-dip galvanized ground socket part-no. 460-40,

Aluminium ornamental bollard

coated anthracite grey (metallic-grey), approx. 900 mm above ground, cast aluminium with steel rod core





stationary, for casting in concrete

with ground anchor, total length: approx. 1300 mm

chain eyelets	FC	kg	part no.
without eyelet	Α	9.5	495B
with 1 eyelet	Α	9.5	495B+1
with 2 eyelets	Α	9.5	495B+2

removable, with triangular locking mechanism acc. to DIN 3223, self-engaging lock, with hot-dip galvanized ground socket part-no. 470-10,

seir-engaging lock, with not-dip galvanized ground socket part-no. 470-10 approx. 500 mm below ground

chain eyelets	FC	kg	part no.
without eyelet	Α	12.0	495FB
with 1 eyelet	Α	12.0	495FB+1
with 2 eyelets	Α	12.0	495FB+2

Aluminium miniature bollards

coated anthracite grey (metallic grey), approx. 460 mm above ground, cast aluminium with steel rod core



stationary, for casting in concrete

with ground anchor, total length: approx. 800 mm

chain eyelets	FC	kg	part no.
without eyelet	Α	3.5	495MB
with 2 eyelets	Α	3.5	495MB+2



Aluminium ornamental post

cast aluminium with steel rod core, approx. 900 mm above ground, coated matt black





on site. The hinge joints make these railings very flexible to set up. The hinge joints can be set up vertically or horizontally up to 90°.

Powder-coated in common RAL colors, see page color finishes.



Aluminium ornamental bollard

coated anthracite grey (metallic grey), approx. 900 mm above ground, cast aluminium with steel rod core

	FC	kg	part no.
end post for top bar	Α	10.0	495-01B
middle post for top bar	Α	10.0	495-02B
corner post for top bar 90°	Α	10.0	495-03B
end post for top and knee bar	Α	12.5	495-11B
middle post for top and knee bar	Α	12.5	495-12B
corner post for top and knee bar 90°	Α	12.5	495-13B

FC

FC

Α

removable, with triangular locking mechanism acc. to DIN 3223, self-engaging lock,

kg

6.5

6.5

kg

9.5

9.5

9.5

part no.

490B+1

490B+2

part no.

490FB

490FB+1

490FB+2

490B

Cross bar

steel tube \emptyset 33.7 mm, length: 2000 mm, hot-dip galvanized and coated anthracite grey (metallic grey) cross bar, including aluminium connection sockets for straight horizontal position

FC	kg	part no.
Α	3.0	495-20B



Joint element

aluminium joint element for use up to 90°, for different slopes and angle positions

FC	kg	part no.
Α	0.5	495-24B

Work site protection

80 x 80 mm

100 x 100 mm



Ornamental bollard of square

steel tube 70 x 70 mm with flat bar steel top, approx. 950 mm, above ground, hot-dip galvanized and DB 703 coated



Content

stationary

	FC	kg	part no.	part no.
for casting in concrete with ground anchor, total length: approx. 1300 mm	Α	8.5	4073B	40731B
to be fixed by plugs with base plate 100 x 150 mm	Α	7.0	4073PB	40731PB

removabl

with triangular locking mechanism acc. to DIN 3223, self-engaging lock, with hot-dip galvanized ground socket part-no. 470-10, approx. 500 mm below ground

	FC	kg	part no.	part no.
with triangular locking mechanism, acc. to DIN 3223	Α	13.0	4073FB	40731FB







	FC	part no. kg	part no.	part no.
for casting in concrete with ground anchor, total length: approx. 1300 mm	А	4071B 7.0	4081B 9.0	4075B 11.0
to be fixed by plugs with base plate	А	4071PB 7.0	4081PB 8.5	4075PB 10.0

70 x 70 mm

removable

stationary


self-engaging lock,with hot-dip galvanized ground socket part-no. 470-10, approx. 500 mm below ground

	FC	·	part no. kg	part no. kg
with triangular locking mechanism,	Α	4071FB	4081FB	4075FB
acc. to DIN 3223		11.5	14.5	16.5



Ornamental bollard

of steel tube 70 x 70 mm with ornamental cap, approx. 950 mm above ground, hot-dip galvanized and coated RAL 7016



473B 4730B

stationary			decorative ring	decorative ring
	FC	kg	part no.	part no.

	FC	kg	part no.	part no.
for casting in concrete with ground anchor, total length: approx. 1300 mm	Α	8.5	473B	4730B
to be fixed by plugs with base plate 100 x 150 mm	Α	8.5	473PB	4730PB

removable

self-engaging lock, incl. ground rosette, with hot-dip galvanized ground socket part-no. 470.10, approx. 500 mm below ground

	FC	kg	part no.	part no.
with triangular locking mechanism, acc. to DIN 3223	Α	13.0	473FB	4730FB
with Euro profile cylinder lock, three keys incl.	Α	14.5	473ZB	4730ZB

foldable to be fixed by plugs

self-engaging lock,

with base plate 100 x 150 mm

	FC	kg	part no.	part no.
with triangular locking mechanism, acc. to DIN 3223	Α	9.0	473FUB	4730FUB
with Euro profile cylinder lock, three keys incl.	Α	10.5	473UZB	4730UZB

foldable for casting in concrete

self-engaging lock, with hot-dip galvanized ground socket part-no. 470-60, approx. 400 mm below ground

	FC	kg	part no.	part no.
with triangular locking mechanis acc. to DIN 3223	m, A	11.5	473FUHB	4730FUHB
with Euro profile cylinder lock, three ke	eys incl. A	13.5	473UZHB	4730UZHB



color variants, reflection classes, and customization, **see pages 6 - 7** barrier posts also available with eyelets, **see page 62**



High-quality stainless steel products for maximum durability!

Stainless steel

Our stainless steel products provide long-lasting protection and an attractive design – ideal for demanding outdoor applications.





Stainless steel barrier posts • Stainless steel bollards • Stainless steel hoops
• Corten steel bollards • Lean-on hoops made of corten steel



Content

Stainless steel post

70 x 70 mm, glass-bead blasted, above ground: approx. 900 mm, with flat head



4070FU

stationary

	FC	kg	part no.
for casting in concrete with ground anchor total length: 1200 mm	Α	5.4	4070
to be fixed by plugs with base plate 100 x 150 mm	Α	4.9	4070P

removable

self-engaging lock, incl. ground rosette, with hot-dip galvanized ground socket part no. 470-10, approx. 500 mm below ground

	FC	kg	part no.
with triangular locking mechanism acc. to DIN 3223	Α	10.3	4070F
with Euro profile cylinder lock, three keys incl.	Α	13.1	4070Z

foldable to be fixed by plugs


self-engaging lock, with base plate 100 x 150 mm

	FC	kg	part no.
with triangular locking mechanism acc. to DIN 3223	Α	6.7	4070FU
with Euro profile cylinder lock, three keys incl.	Α	7.8	4070UZ

foldable for casting in concrete

self-engaging lock, with hot-dip galvanized ground socket part no. 470-60, approx. 400 mm below ground

	FC	kg	part no.
with triangular locking mechanism acc. to DIN 3223	Α	9.2	4070FUH
with Furo profile cylinder lock three keys incl	Δ	10.0	4070HZH

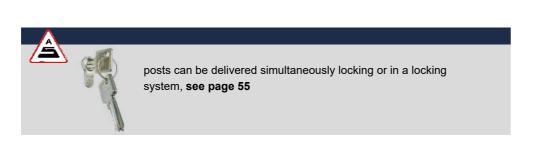



Stainless steel post

Ø 60 mm, grinded, above ground: approx. 900 mm, convex head

4062

stationary

	FC	kg	part no.
for casting in concrete total length: 1200 mm	A•	3.7	4062
to be fixed by plugs with base plate Ø 120 x 5 mm	A•	3.3	4062P



suitable mounting material for this product: set of mounting bolts type 1VA

part no. 470-76 further accessories page 55

removable

self-engaging lock, with hot-dip galvanized ground socket part no. 460-40, approx. 400 mm below ground

	FC	kg	part no.
with triangular locking mechanism acc. to DIN 3223	A•	7.0	4062F

removable

self-engaging lock, with hot-dip galvanized ground socket part no. 460-40, approx. 400 mm below ground

	FC	kg	part no.
with Euro profile cylinder lock, three keys incl.	A•	7.4	4062Z

Accessories

chain eyelets: please add +1 / +2 to the part no.

	FC	kg	part no.
extra charge per eyelet			
barrier chain of stainless steel Ø 5 mm	A•	0.5	430-55
connecting links	A•	0.1	430-56
chain bolting mechanism	A•	0.1	430-57

Stainless steel care spray

content: 400 ml, cleaning and care spray for long-lasting protective film

FC	kg	part no.
Α	0.5	430-58



Stainless steel post

Ø 76 mm, grinded, convex head, above ground approx. 900 mm



4072 without

decorative

4272 with

decorative

stationary groove groove groove

kg FC part no.

for casting in concrete with ground anchor, total length: 1200 mm 5.0 A• 4072 4272

to be fixed by plugs with base plate 100 x 150 mm 5.0 A• 4072P 4272P

removable self-engaging lock, incl. ground rosette, with hot-dip galvanized ground socket part no. 476-40, approx. 400 mm below ground

	kg	FC	part no.	part no.
with triangular locking mechanism, acc. to DIN 3223	9.0	Α•	4072F	4272F
with Euro profile cylinder lock, three keys incl.	1.5	A•	4072Z	4272Z

foldable to be fixed by plugs

self-engaging lock, with base plate 100 x 150 mm

	kg	FC	part no.	part no.
with triangular locking mechanism, acc. to DIN 3223	6.5	A•	4072FU	4272FU
with Euro profile cylinder lock, three keys incl.	7.0	Α•	4072UZ	4272UZ

foldable for casting in concrete

self-engaging lock, with hot-dip galvanized ground socket part no. 470-60, approx. 400 mm below ground $\,$

	kg	FC	part no.	part no.
with triangular locking mechanism, acc. to DIN 3223	8.0	Α•	4072FUH	4272FUH
with Euro profile cylinder lock, three keys incl.	9.0	Α•	4072UZH	4272UZH



posts can be delivered simultaneously locking or in a locking system, see page 55

Stainless steel post

grinded, convex head, above ground: approx. 900 mm



5.7

40103P

 stationary
 Ø 89 mm
 Ø 102 mm

 FC
 kg
 part no.
 kg
 part no.

 or casting in concrete total length: 1200 mm
 A*
 5.4
 4089
 6.2
 40103

removable

self-engaging lock, with hot-dip galvanized ground socket part no. 470-10

to be fixed by plugs with base plate \emptyset 150 x 6 mm

	FC	kg	part no.	kg	part no.
with triangular locking mechanism, acc. to DIN 3223	Α•	10.3	4089F	12.0	40103F
with Euro profile cylinder lock, three keys incl.	Α•	12.0	4089Z	12.0	40103Z



5.1 4089P





Stainless steel post maintain high value and their attraction is timeless.

Stainless steel post

Ø 154 mm, grinded, with flat head



stationary				Ø 154 mm		Ø 204 mm
	total langth in mm	EC	ka	nort no	l ka	nout no

	total length in mm	FC	kg	part no.	kg	part no.
for casting in concrete with ground anchor	900	Α	7.0	40154	10.0	40204
	1200	Α	9.5	40155	13.0	40205
for plugging down with base plate	600	Α	7.5	40154P	10.0	40204P
Tor plugging down with base plate	900	Α	10.0	40155P	13.0	40205P

removable self-engaging lock,

with hot-dip galvanized ground socket part no. 470-10, above ground approx. 900 mm

	FC	kg	part no.	kg	part no.
with triangular locking mechanism acc. to DIN 3223	Α	14.0	40154F	15.5	40204F
with Euro profile cylinder lock, three keys incl.	Α	14.0	40154Z	15.5	40204Z






Fully retractable stainless steel post

Ø 154 mm, grinded, with flat head, with gas spring, with triangular lock, height above ground approx. 750 mm, with hot-dip galvanized, ground sleeve Ø 168.3 mm




for more info scan the QR code

FC	kg	part no.
Α	44.0	40154VER





- stainless steel
- semi-automatic moves up by gas pressure
- to be unlocked by triangular lock
- easy handling

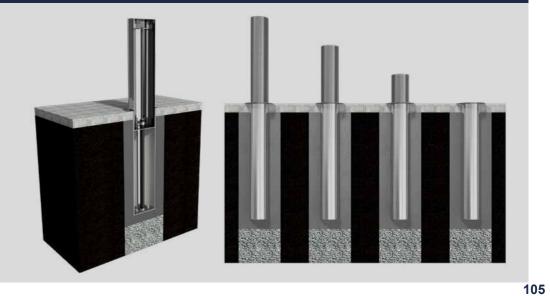

Work site protection

Stainless steel



Stainless steel hoop Ø 48 mm, grinded surface,

for casting in concrete





total width in mm	total height in mm	FC	kg	part no.
800	1200	В•	9.0	449-09
1000	1200	В•	9.5	449-12
1200	1200	В•	10.0	449-13

Content



with cross bar

total width in mm	total height in mm	FC	kg	part no.
800	1200	В	11.0	449-21
1000	1200	В	12.5	449-22
1200	1200	В	13.5	449-23



universal hoop

total width in mm	total height in mm	FC	kg	part no.
300	1200	Α•	9.0	449-30



round hoop

total width in mm	total height in mm	FC	kg	part no.
460	1200	A•	7.5	449-46
650	1200	В•	8.0	449-65



round hoop with cross bar

total width in mm	total height in mm	FC	kg	part no.
650	1200	В	10.0	449-66



Ø 48 mm, grinded surface, for plugging down, with base plate Ø 120 x 5 mm





without cross bar

total width in mm	total height in mm	FC	kg	part no.
800	800	В	7.5	449-09P
1000	800	В	8.0	449-12P
1200	800	В	9.0	449-13P



with cross bar

total width in mm	total height in mm	FC	kg	part no.
800	800	В	10.0	449-21P
1000	800	В	11.0	449-22P
1200	800	В	12.0	449-23P



universal hoop

total width in mm	total height in mm	FC	kg	part no.
300	800	Α	6.0	449-30P



round hoop

total width in mm	total height in mm	FC	kg	part no.
460	800	Α	6.0	449-46P
650	800	В	7.0	449-65P



round hoop with cross bar

total width in mm	total height in mm	FC	kg	part no.
650	800	В	8.0	449-66P



suitable mounting material for this product: set of mounting bolts type 1.2VA part no. 470-762

Stainless steel hoop Ø 48 mm



Stainless steel bicycle lean-on hoop

Ø 48 mm, very attractive and functional design, grinded surface



total width: approx. 1400 mm, height above ground: approx. 850 mm

	FC	kg	part no.
for casting in concrete	В	9.0	449-50

with base plate Ø 120 mm, pitch circle Ø 94 mm, 3 holes Ø 14 mm

	FC	kg	part no.
for plugging down	В	8.0	449-50P




Stainless steel bicycle lean-on hoop

Ø 48 mm, miter-welded, for casting in concrete grinded surface



total width in mm	total height in mm	FC	kg	part no.
500	1200	В	8.5	449-85
700	1200	В	9.0	449-86
1000	1200	В	9.5	449-87
1200	1200	В	10.5	449-88

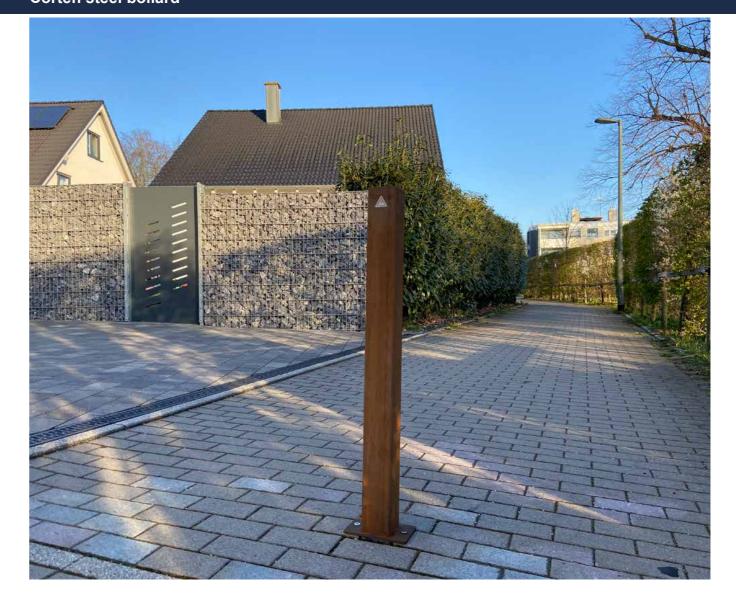

Ornamental bollard made of corten steel tube

80 x 80 mm, with flat head, approx. 900 mm above ground, surface raw, optical pre-rusted

stationary

	FC	kg	part no.
for casting in concrete with ground anchor, total length: approx. 1200 mm	Α	9.0	4481
to be fixed by plugs with base plate 100 x 170 mm	Α	8.5	4481P

removable

self-engaging lock, with hot-dip galvanized ground socket part no. 470-10, approx. 500 mm

	FC	kg	part no.	
with triangular locking mechanism acc. to DIN 3223	Α	14.5	4481F	

Lean-on hoop made of corten steel

for casting in concrete, total height: approx. 1100 mm, for casting in concrete, surface raw, optical pre-rusted







U-profile 80 x 40 mm

	FC	kg	part no.
total width 750 mm	В	20.0	4450-075







U-profile 80 x 40 mm

with upper part made of stainless steel Ø 48 mm

	FC	kg	part no.
total width 750 mm	В	21.5	4450-175



Lean on hoops are manufactured to order. Orders cannot be cancelled, these products cannot be returned.

Flexible barrier elements for every application!

Barrier elements

Versatile barrier systems for securing roads and pedestrian areas.





Tubular hoops • Access barriers • Height restriction barriers • Mobile manual barrier • Protective railing • City fence / railing

- hoops for protection
- to secure sidewalks, separate roadways, block green areas from cars or protection trees and plants
- suitable for production areas and stocks

without cross bar for casting in concrete

• as lean-on hoop for bicycles

Steel tube

Ø 48 x 2.5 mm



hot-dip galvanized

galvanized and white coated with red reflecting stripes

Content

	total width in mm	total height in mm	FC	kg	part no.	part no.
	1000	1000	В•	8.0	448-06	448-06B
	1500	1000	В•	9.5	448-07	448-07B
	2000	1000	В•	10.5	448-08	448-08B
	700	1200	В•	8.0	448-11	448-11B
	1000	1200	В•	9.0	448-12	448-12B
	1200	1200	В•	9.4	448-13	448-13B
ı	500	1400	В•	9.0	448-09	448-09B
	1000	1400	В•	10.0	448-10	448-10B
	1500	1400	В•	11.0	448-15	448-15B
	2000	1400	В•	13.0	448-20	448-20B
	2500	1400	C•	14.5	448-25	448-25B



hot-dip galvanized

alvanized and white coated	
vith red reflecting stripes	


without cross bar for plu	gging down			hot-dip galvanized	with red reflecting stripes
total width in mm	total height in mm	FC	kg	part no.	part no.
1000	1000	В•	9.0	448-52	448-52B
1500	1000	В•	10.5	448-53	448-53B
2000	1000	В•	12.0	448-54	448-54B

color variants, reflection classes, and customization, see pages 6 - 7 Other dimensions available on request. Powder-coats are made to order. Orders cannot be cancelled or deliveries returned.





Steel tube Ø 48 x 2.5 mm

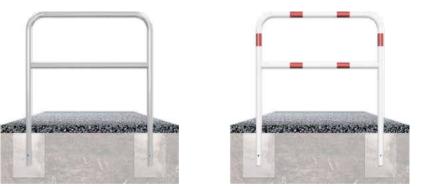

with cross bar for casting in concrete

with cross bar for plugging down

ot-dip	galvanized
--------	------------

galvanized and white coated with red reflecting stripes

total width in mm	total height in mm	FC	kg	part no.	part no.
700	1200	В•	10.5	448-21	448-21B
1000	1200	В•	11.5	448-22	448-22B
1200	1200	В•	12.5	448-23	448-23B
500	1400	В•	10.0	448-31	448-31B
1000	1400	В•	12.5	448-32	448-32B
1500	1400	В•	15.5	448-33	448-33B
2000	1400	В•	18.5	448-34	448-34B
2500	1400	C•	21.0	448-35	448-35B





galvanized and white coated with red reflecting stripes

total width in mm	total height in mm	FC	kg	part no.	part no.
1000	1000	В•	12.0	448-62	448-62B
1500	1000	В•	14.5	448-63	448-63B
2000	1000	В•	17.5	448-64	448-64B



Content

Steel tube

Ø 60 x 2.5 mm



vithout cross bar for casting in concrete	hot-dip galvanized	galvanized and white coated with red reflecting stripes

total width in mm	total height in mm	FC	kg	part no.	part no.
1000	1000	В•	9.5	465-06	465-06B
1500	1000	В•	11.5	465-07	465-07B
2000	1000	В•	13.0	465-08	465-08B
700	1200	В•	10.0	465-11	465-11B
1000	1200	В•	11.0	465-12	465-12B
1200	1200	В•	12.0	465-13	465-13B
500	1400	В•	11.0	465-09	465-09B
1000	1400	В•	12.5	465-10	465-10B
1500	1400	В•	14.5	465-15	465-15B
2000	1400	В•	16.0	465-20	465-20B
2500	1400	C•	18.0	465-25	465-25B



galvanized and white coated with red reflecting stripes

without cross	har for	nlugging	down
WILLIOUL CIUSS	Dai 101	piugging	uowii

thout cross bar for plu	hot-dip galvanized			
total width in mm	total height in mm	FC	kg	part no.
1000	1000	В•	11.0	465-52

total width in mm	total height in mm	FC	kg	part no.	part no.
1000	1000	В•	11.0	465-52	465-52B
1500	1000	В•	13.0	465-53	465-53B
2000	1000	В•	14.5	465-54	465-54B



Steel tube

Ø 60 x 2.5 mm



with cross	har for	casting in	1 concrete

galvanized and white coated with red reflecting stripes

or occ zan ror oacung in concrete				a.p ga	with rea reflecting stripes	
total width in mm	total height in mm	FC	kg	part no.	part no.	
700	1200	В•	12.0	465-21	465-21B	
1000	1200	В•	14.5	465-22	465-22B	
1200	1200	В•	15.5	465-23	465-23B	
500	1400	В•	12.0	465-31	465-31B	
1000	1400	В•	15.5	465-32	465-32B	
1500	1400	В•	19.5	465-33	465-33B	
2000	1400	В•	23.0	465-34	465-34B	
2500	1400	C•	26.5	465-35	465-35B	





with cross bar for plugging down

ho	t-d	ip	gal	van	izec	ı
----	-----	----	-----	-----	------	---

galvanized and white coated with red reflecting stripes

total width in mm	total height in mm	FC	kg	part no.	part no.
1000	1000	В•	14.0	465-62	465-62B
1500	1000	В•	17.5	465-63	465-63B
2000	1000	В•	21.0	465-64	465-64B



Other dimensions, quantities available on request. Powder-coats are made to order. Orders cannot be cancelled or deliveries returned.



Content

Round hoops

of steel tube, Ø 48 X 2.5 mm



for casting in concrete total height: approx. 1200 mm

without cross bar

total width: approx. 460 mm

		FC	kg	part no.
3 1	hot-dip galvanized	A•	7.0	448-046
1	hot-dip galvanized and coated color: green (RAL 6005)	Α	7.0	448-046B



without cross bar total width: approx. 650 mm

	FC	kg	part no.
hot-dip galvanized	В•	7.5	448-065
hot-dip galvanized and coated color: green (RAL 6005)	В	7.5	448-065B



with cross bar total width: approx. 650 mm

		FC	kg	part no.	
3	hot-dip galvanized	В•	9.0	448-066	
1	hot-dip galvanized and coated color: green (RAL 6005)	В	9.0	448-066B	

Lean-on hoops for plugging down

with base plate 100 x 150 mm (the total height changes to 900 mm)

add letter P to the part-no.

Tree guard hoops


Our tree guard hoops give an effective contribution to environmental predection. They help preserve valuable stocks of trees from impact by parking cars. They are also ideal for protecting lamps, etc.



Tree guard hoops for casting in concrete

CONTRACTOR DESCRIPTION OF PARTY PROPERTY AND PROPERTY AND PARTY AN

Steel tube Ø 48 x 2.5 mm total width: approx. 750 mm, total height: approx. 1400 mm




Steel tube Ø 60 x 2.5 mm total width: approx. 800 mm, total height: approx. 1450 mm

	FC	kg	part no.
hot-dip galvanized	В•	11.0	463-00
hot-dip galvanized and coated color: green (RAL 6005)	В	11.0	463-00B



Universal hoop for casting in concrete

Steel tube Ø 48 x 2.5 mm total width: approx. 750 mm, total height: approx. 1400 mm

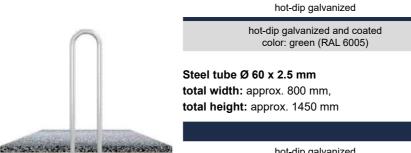

	FC	kg	part no.
hot-dip galvanized	Α•	10.5	465-70
hot-dip galvanized and coated color: green (RAL 6005)	Α	10.5	465-70B

FC

A•

8.0

8.0

Work site protection

part no.

448-70

448-70B

galvanized and white coated with red reflecting

coated with red reflecting

stripes

stripes



Anti-nudge hoop for trees and posts

steel tube construction with 2 hoops Ø 60 mm, with welded on cross bars Ø 48 mm for nesting



hot-dip galvanized

for casting in concrete

total width in mm	total depth in mm	height above ground	FC	kg	part no.	part no.
600	600	650	В•	21.5	465-066	465-066B
800	800	800	В•	25.5	465-068	465-068B



plugging down		hot-dip galvanized

total width in mm	total depth in mm	height above ground	FC	kg	part no.	part no.
600	600	650	В•	19.0	465-066P	465-066PB
800	800	800	В•	24.0	465-068P	465-068PB



also available in yellow / black, see page 206





Guard hoops

steel tube Ø 76 x 2.6 mm, without cross bar



	for casting in conc	rete			hot-dip galvanized	galvanized and white coated with red reflecting stripes
	total width in mm	total height in mm	FC	kg	part no.	part no.
	1000	1500	В	17.5	475-10	475-10B
	1500	1500	В•	19.5	475-15	475-15B
	2000	1500	В•	22.5	475-20	475-20B
	2500	1500	C•	24.5	475-25	475-25B
	750	1000	В	13.0	477-05	477-05B
l	1000	1000	В	14.0	477-06	477-06B
	750	1500	В	16.0	477-08	477-08B

for plugging down



total width in mm	total height in mm	FC	kg	part no.	part no.	
750	650	В	9.5	477-05P	477-05PB	
1000	650	В	11.0	477-06P	477-06PB	
750	1150	В	14.5	477-08P	477-08PB	
1000	1150	В	15.5	477-09P	477-09PB	

Universal hoop

steel tube Ø 76 x 2.6 mm



for casting in concrete


total width in mm	total height in mm	FC	kg	part no.	part no.
400	1000	В	11.0	477-04	477-04B
400	1500	В	14.5	477-07	477-07B



otal width in mm	total height in mm	FC	kg	part no.	part no.
400	650	В	9.5	477-04P	477-04PB
400	1150	В	12.5	477-07P	477-07PB

total width: 460 mm

total height: 1200 mm

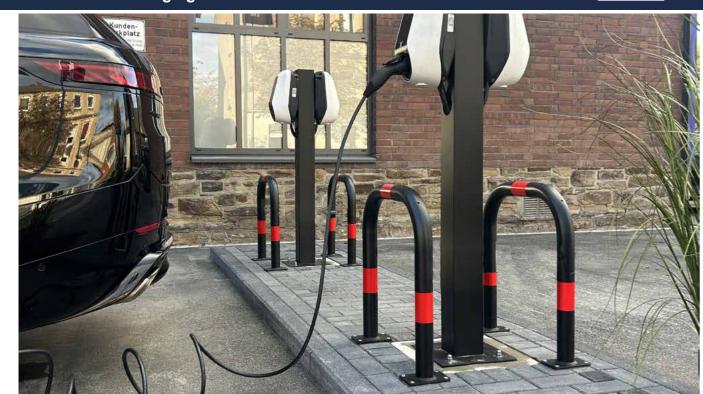



Barrier post

as basic protection for E-charging stations, Ø 48 mm

for casting in concrete

surface	film color	FC	kg	part no.	kg	part no.
hot-dip galvanized	blue	Α	8.0	4L48-70SBL	7.0	4L48-046SBL
hot-dip galvanized	red	Α	8.0	4L48-70SRO	7.0	4L48-046SRO
hot-dip galvanized	green	Α	8.0	4L48-70SGR	7.0	4L48-046SGR
white coated	blue	Α	8.0	4L48-70BSBL	7.0	4L48-046BSBL
white coated	red	Α	8.0	4L48-70BSRO	7.0	4L48-046BSRO
white coated	green	Α	8.0	4L48-70BSGR	7.0	4L48-046BSGR

total width: 300 mm

total height: 1400 mm

for plugging down

surface	film color	FC	kg	part no.	kg	part no.
hot-dip galvanized	blue	Α	7.0	4L48-70PSBL	7.5	4L48-046PSBL
hot-dip galvanized	red	Α	7.0	4L48-70PSRO	7.5	4L48-046PSRO
hot-dip galvanized	green	Α	7.0	4L48-70PSGR	7.5	4L48-046PSGR
white coated	blue	Α	7.0	4L48-70PBSBL	7.5	4L48-046PBSBL
white coated	red	Α	7.0	4L48-70PBSRO	7.5	4L48-046PBSRO
white coated	green	Α	7.0	4L48-70PBSGR	7.5	4L48-046PBSGR

Barrier posts & impact protection posts for E-charging stations – protection & individuality

Our high-quality barrier and impact protection posts provide optimal protection for your E-charging stations and ensure a clear boundary of the charging areas. They prevent collision damage, organize parking spaces, and enhance the safety of the electric charging infra-

Custom color design – Perfectly tailored to your design. In addition to standard colors, we offer you the opportunity to order your barrier and impact protection posts in custom colors. Whether matching your corporate design, improving visibility, or aesthetically integrating into the surroundings - we manufacture the protective posts according to your color preferences.



Impact protection posts as protection for E-charging stations

for special and effective protection of E-charging stations, Ø 76 mm

for casting in concrete

surface film color FC kg part no. hot-dip galvanized blue B 13.0 4L77-05SBL 4L77-06SBL hot-dip galvanized red B 13.0 4L77-05SRO 4L77-06SRO hot-dip galvanized green B 13.0 4L77-05SGR 4L77-06SGR	
hot-dip galvanized red B 13.0 4L77-05SRO 4L77-06SRO	
hot-dip galvanized green B 13.0 4L77-05SGR 4L77-06SGR	
white coated blue B 13.0 4L77-05BSBL 4L77-06BSBL	
white coated red B 13.0 4L77-05BSRO 4L77-06BSRO)
white coated green B 13.0 4L77-05BSGR 4L77-06BSGR	ŧ

total width: 750 mm

total height: 1000 mm

for plugging down

	1			1	1
surface	film color	FC	kg	part no.	part no.
hot-dip galvanized	blue	В	14.0	4L77-05PSBL	4L77-06PSBL
hot-dip galvanized	red	В	14.0	4L77-05PSRO	4L77-06PSRO
hot-dip galvanized	green	В	14.0	4L77-05PSGR	4L77-06PSGR
white coated	blue	В	14.0	4L77-05PBSBL	4L77-06PBSBL
white coated	red	В	14.0	4L77-05PBSRO	4L77-06PBSRO
white coated	green	В	14.0	4L77-05PBSGR	4L77-06PBSGR



also available as barrier posts and impact protection bollards for charging stations, see barrier posts section, pages 32 - 33

total width: 1000 mm

total height: 1200 mm

120


Access barriers

removable, revolving, round steel tube Ø 60 mm, with triangular locking mechanism acc. to DIN 3223, including hot-dip galvanized ground sockets part-no. 460-10 and part-no. 460-40 total height: approx. 1400 mm, above ground: approx. 1000 mm









total width in mm	FC	kg	part no.
1000	В	16.5	465-10F
1500	В	18.5	465-15F
2000	В	20.0	465-20F
2500	С	22.0	465-25F

galvanized and white coated with red reflecting stripes

total width in mm	FC	kg	part no.
1000	В	16.5	465-10FB
1500	В	18.5	465-15FB
2000	В	20.0	465-20FB
2500	С	22.0	465-25FB







with cross bar	
hot-dip galvanized	

total width in mm	FC	kg	part no.
1000	В	16.5	465-32F
1500	В	18.5	465-33F
2000	В	20.0	465-34F
2500	С	22.0	465-35F

galvanized and white coated with red reflecting stripes

total width in mm	FC	kg	part no.
1000	В	16.5	465-32FB
1500	В	18.5	465-33FB
2000	В	20.0	465-34FB
2500	С	22.0	465-35FB







color variants, reflection classes, and customization, see pages 6 - 7



Access barriers

with triangular lock, acc. to DIN 3223, swing-back, consists of:

1 stationary post, revolving, square tube 70 x 70 mm, above ground 900 mm

1 removable post, with triangular locking mechanism DIN 3223, square tube 70 x 70 mm


1 ground socket, square tube 80 x 80 mm, 500 mm long, part-no. 470-10

1 top bar

square tube 60 x 40 mm







without cross bar

hot-dip galvanized

1500 B 25.5 410-15 2000 B 27.5 410-20 2500 C 29.5 410-25 3000 C 31.0 410-30	total width in mm	FC	kg	part no.
2500 C 29.5 410-25	1500	В	25.5	410-15
	2000	В	27.5	410-20
3000 C 31.0 410-30	2500	С	29.5	410-25
	3000	С	31.0	410-30

galvanized and white coated with red reflecting stripes

total width in mm	FC	kg	part no.
1500	В•	25.5	410-15B
2000	В•	27.5	410-20B
2500	C•	29.5	410-25B
3000	C•	31.0	410-30B









with cross bar hot-dip galvanized

total width in mm	FC	kg	part no.
1500	В	31.0	412-15
2000	В	34.5	412-20
2500	С	38.5	412-25
3000	С	42.0	412-30




total width in mm	FC	kg	part no.
1500	В•	31.0	412-15B
2000	В•	34.5	412-20B
2500	C•	38.5	412-25B
3000	C•	42.0	412-30B





note for your order: additional ground sockets (type 470-10) for settling the barrier ordered directly (extra charge)



Access barriers with Euro profile cylinder lock on request. A version that can also be taken out on both sides is also available.

for more info

fixed, screwable, including screws, consisting of:

2 fixed posts, steel tube 70 x 70 mm, above ground: 900 mm, with ground anchor, below ground: 400 mm

bars, steel square tube 60 x 40 mm



Content



with top bar hot-dip galvanized

total width in mm	FC	kg	part no.
1500	В•	19.5	414-15
2000	В•	21.5	414-20
2500	C•	23.5	414-25
3000	C•	25.0	414-30



hot-dip galvanized and white coated with red reflecting stripes

total width in mm	FC	kg	part no.
1500	В•	19.5	414-15B
2000	В•	21.5	414-20B
2500	C•	23.5	414-25B
3000	C•	25.0	414-30B



with top and cross bar hot-dip galvanized

total width in mm	FC	kg	part no.
1500	В•	25.0	416-15
2000	В•	29.0	416-20
2500	C•	32.5	416-25
3000	C•	36.0	416-30



hot-dip galvanized and white coated with red reflecting stripes

total width in mm	FC	kg	part no.	
1500	В•	25.0	416-15B	
2000	В•	29.0	416-20B	
2500	C•	32.5	416-25B	
3000	C•	36.0	416-30B	

Stationary access barriers

for bolting on site, including bolts, consisting of:

2 stationary posts, square tube 70 x 70 mm, above ground 900 mm, total height: 1300 mm

bars, steel square tube 60 x 40 mm





with top bar

hot-dip galvanized

total width in mm	FC	kg	part no.
1500	В	19.0	4014-15
2000	В	21.0	4014-20
2500	С	23.0	4014-25



hot-dip galvanized and white coated with red reflecting stripes

total width in mm	FC	kg	part no.
1500	В	19.0	4014-15B
2000	В	21.0	4014-20B
2500	С	23.0	4014-25B



with top and cross bar

hot-dip galvanized

total width in mm	FC	kg	part no.
1500	В	24.0	4016-15
2000	В	28.0	4016-20
2500	С	32.0	4016-25



hot-dip galvanized and white coated with red reflecting stripes

total width in mm	FC	kg	part no.
1500	В	24.0	4016-15B
2000	В	28.0	4016-20B
2500	С	32.0	4016-25B



Access barriers as welded frame are manufactured to order. Other widths on request. Subject to change. Orders cannot be cancelled, access barriers cannot be returned.

Height restriction barriers

stationary, with cable pull

vertical clearance variably turnable 1800 - 2800 mm, height above ground approx. 3000 mm

2 square posts

steel tube Ø 102 mm, hot-dip galvanized and white coated

cross bar

aluminium 100 x 50 mm, white coated with red reflecting stripes



D

D

D

86.0

91.0

93.5

96.0


417-602BP

417-702BP

417-802BP

417-902BP

for casting in concrete

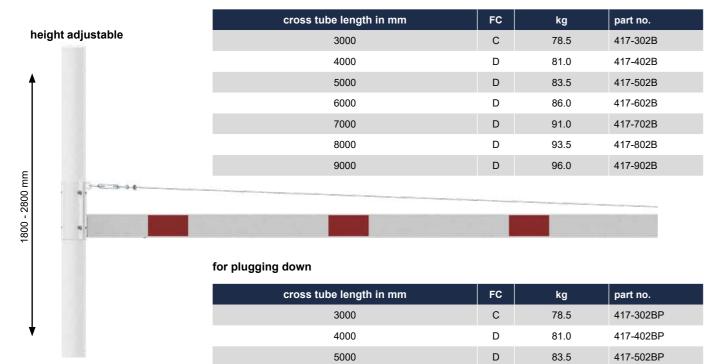

6000

7000

8000 9000



Height restriction barriers

pivotable horizontally with cable pull, lock opened or closed by pin, white coated with red reflecting stripes

vertical clearance variably turnable 1800 - 2800 mm, height above ground approx. 3000 mm

1 piece

revolving post, steel tube Ø 102 mm, hot-dip galvanized and white coated

cross bar

aluminium 100 x 50 mm, white coated with red reflecting stripes







triangular lock

Euro profile cylinder lock

cross tube length in mm	FC	kg	part no.	part no.	part no.
2000	С	57.5	417-201VB	417-201FB	417-201ZB
2500	С	58.5	417-251VB	417-251FB	417-251ZB
3000	С	60.0	417-301VB	417-301FB	417-301ZB
3500	С	61.0	417-351VB	417-351FB	417-351ZB
4000	D	62.0	417-401VB	417-401FB	417-401ZB
4500	D	63.5	417-451VB	417-451FB	417-451ZB

for	plugging	down
	piuggiiig	uom

for casting in concrete

for padlock

triangular lock

Euro profile cylinder

cross tube length in mm	FC	kg	part no.	part no.	part no.
2000	С	57.5	417-201VBP	417-201FBP	417-201ZBP
2500	С	58.5	417-251VBP	417-251FBP	417-251ZBP
3000	С	60.0	417-301VBP	417-301FBP	417-301ZBP
3500	С	61.0	417-351VBP	417-351FBP	417-351ZBP
4000	D	62.0	417-401VBP	417-401FBP	417-401ZBP
4500	D	63.5	417-451VBP	417-451FBP	417-451ZBP







Height restriction barriers

hot-dip galvanized and white coated with red reflecting stripes



stationary 100 x 100 mm for casting in concrete

2 square posts

of steel tube 100 x 100 mm, total height: approx. 3000 mm, 1 cross bar made of aluminium tube, 100 x 50 mm, clear height: approx. 2300 mm

cross tube length in mm	FC	kg	part no.
3000	С	66.2	417-32B
4000	D	68.5	417-42B
5000	D	71.0	417-52B
6000	D	73.5	417-62B

stationary 70 x 70 mm for casting in concrete

2 posts of steel tube 70 x 70 mm,
total height: approx. 2500 mm
1 cross bar 60 x 40 mm, steel tube,
clear height: approx. 2000 mm

cross tube length in mm	FC	kg	part no.
3000	С	38.5	417-30B
4000	D	44.0	417-40B

stationary 100 x 100 mm for plugging down

2 posts of steel tube 100 x 100 mm, total height: approx. 3000 mm 1 cross bar, aluminium tube, 100 x 50 mm clear height: approx. 2300 mm

cross tube length in mm	FC	kg	part no.
3000	С	66.2	417-32BP
4000	D	68.5	417-42BP
5000	D	71.0	417-52BP
6000	D	73.5	417-62BP

stationary 70 x 70 mm for for plugging down

2 posts of steel tube 70 x 70 mm, total height: approx. 2500 mm 1 cross bar 60 x 40 mm, steel tube clear height: approx. 2000 mm

cross tube length in mm	FC	kg	part no.
3000	С	38.5	417-30BP
4000	D	44.0	417-40BP



Pivotable, 70 x 70 mm for casting in concrete

1 post

made of steel tube 70 x 70 mm, stationary, for casting in concrete, total height: approx. 2500 mm


cross tube length in mm	FC	kg	part no.
3000	В	42.5	417-31B
4000	С	45.0	417-41B

1 post

made of steel tube 70 x 70 mm, incl. ground socket type 470-10, approx. 500 mm below ground level

1 cross bar

made of tubular steel 60 x 40 mm, **clear height:** approx. 2000 mm

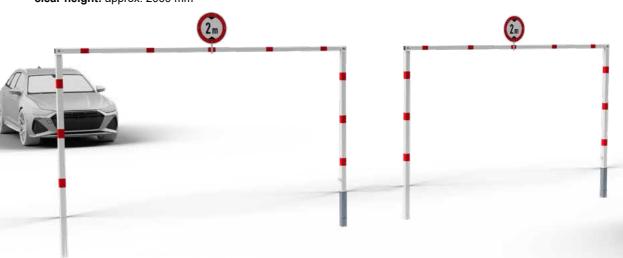


Available as accessory:


for all height limiters with cross bar 100 x 50 mm

Barrier made of aluminium tube

Ø 40 mm, white coated with red reflecting with universal fastening incl. chain for attachment to the cross bar of the height limiter

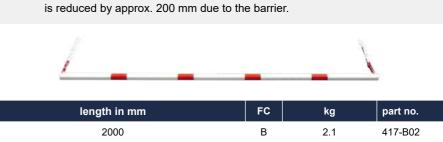

Attention: The (maximum) clear height of the height limiter



417-98

Bracket for information sign

for fastening to the crossbar of the height limiter, suitable for sign size \emptyset 420 mm, hot-dip galvanized, white coated

	FC	kg	part no.
universal holder with fixing bracket for height limiter with cross tube 100 x 50 mm	Α	0.8	417-98
holder for screwing on from the side	А	0.7	417-97

Protect gateways, halls with limited height, subways, etc.

Barrier

aluminium profile height: 100 mm, with protecting caps on the sides, white coated with red reflecting stripes incl. 2 x 1 m steel chain, galvanized



reflecting one-sided

length in mm	FC	kg	part no.
2000	В	3.5	4117-20B
3000	С	5.0	4117-30B
4000	D	6.0	4117-40B
5000	D	7.0	4117-50B
6000	D	8.5	4117-60B

reflecting both-sided

length in mm	FC	kg	part no.
2000	В	3.5	4217-20B
3000	С	5.0	4217-30B
4000	D	6.0	4217-40B
5000	D	7.0	4217-50B
6000	D	8.5	4217-60B

Clearly visible crash guard for posts, pillars, poles etc.

Crash guard angle

made of aluminium plate with 4 bores Ø 8 mm for plugging down, height 1000 mm, angular dimension 120 mm, white / red reflecting





FC	kg	part no.
Α	1.3	4317RB
Α	1.3	4317LB



these products are also available in yellow / black, see work site protection page 214

Mobile height limiter


cross tube length in mm

2000 2500

3000


3500 4000

to be mounted on a concrete support (600 kg, part-no. 3F120) of an adapter plate welded to the bottom of the post, can be positioned by forklift or crane, optional with part-no. 70670N for levelling uneven floors, unevenness of the

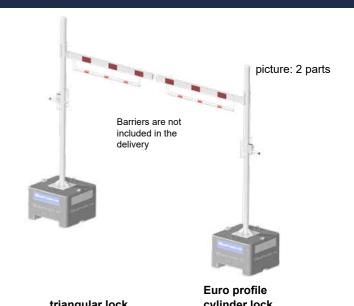

for padlock

		тог распоск	triangular lock	cylinder lock
FC	kg	part no.	part no.	part no.
С	657.5	417-201VBPM	417-201FBPM	417-201ZBPM
С	658.5	417-251VBPM	417-251FBPM	417-251ZBPM
С	660.0	417-301VBPM	417-301FBPM	417-301ZBPM
С	661.0	417-351VBPM	417-351FBPM	417-351ZBPM
D	662.0	417-401VBPM	417-401FBPM	417-401ZBPM

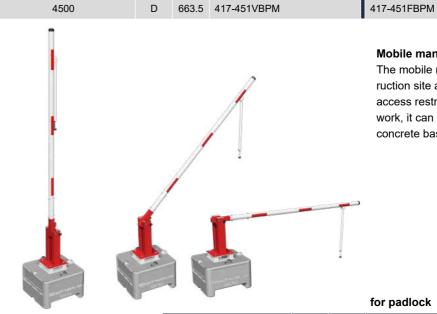

Mobile manual barrier – Flexible, fast, and reliable!

417-451ZBPM

The mobile manual barrier is the ideal solution for construction site access points, renovations, or other temporary access restrictions. By eliminating the need for foundation work, it can be set up quickly and securely. Our 600 kg concrete base ensures maximum stability.

for padlock

riang	ular	lock	
HILLIA	uiui		

barrier arm length in mm	FC	kg	part no.	part no.
3000	С	645.5	415-31VPBM	415-31FPBM
4000	D	648.0	415-41VPBM	415-41FPBM
5000	D	651.0	415-51VPBM	415-51FPBM
6000	D	652.0	415-61VPBM	415-61FPBM
7000	D	655.0	415-71VPBM	415-71FPBM

Euro	profile	cylinder	lock

	triangular lock and Euro
ro profile cylinder lock	profile cylinder lock

barrier arm length in mm	FC	kg	part no.	part no.
3000	С	646.5	415-31ZPBM	415-31FZPBM
4000	D	649.5	415-41ZPBM	415-41FZPBM
5000	D	651.5	415-51ZPBM	415-51FZPBM
6000	D	654.5	415-61ZPBM	415-61FZPBM
7000	D	656.5	415-71ZPBM	415-71FZPBM

Mobile Bollard for Maximum Safety and Visibility.

The approach bollard, featuring a solid concrete base and a robust steel tube impact predection bollard (Ø: 273 mm), is the perfect solution for your traffic control needs. Designed for practical positioning, the concrete base is equipped for forklift handling. With a high-quality coating and white-red reflective film, this bollard ensures maximum visibility and safety, both day and night.



Mobile Bollard - heavy-duty version consisting of: concrete base (800 x 800 x 145 mm) and bollard type 40274B,

made of steel tube (Ø 273 mm), with flat top, hot-dip galvanized, and coated in

	FC	kg	part no.	
with white and red reflective stripes	В	230.0	40274MB	

Concrete guide barrier

designed for separating traffic areas and work zones, incl. a mounted barrier hoop (Ø 76 mm), height approx. 700 mm

- suitable for transport by fork-lift truck or movement by crane, due to the ground clearance of 80 mm and 4 sturdy crane eyes
- beveled ends allow installation at angles of up to 45° between elements.
- option to attach a logo plate (590 mm x 340 mm).
- concrete dimensions: length: 3480 mm, width: 350 mm, height: 380 mm



	FC	kg	part no.
hot-dip galvanized with red reflective stripes	В	685.0	4077-35

Perfect for Various Applications

Industry & Construction Sites







Protective Railings and Barrier Hoops – Safety and Flexibility for Every Application!

Advantages at a Glance:

Maximum Safety

Sturdy steel tube frame with a durable coating

Flexible System

Suitable for use in industry, traffic management, sports facilities, and more

Easy Installation

Available for embedding in concrete or bolting with a base plate

Customization

Heights and widths can be tailored to your needs

Guard hoop with LED light strip

Ø 48.3 x 2.5 mm, with crossbar, width: 1000 mm, height: 1200 mm, hot-dip galvanized, black coated



	FC	kg	part no.
for casting in concrete	В	12.0	4E48-22B
to be fixed by plugs	В	12.0	4E48-62B



On the following pages, you will find detailed information about our protective

Protective railing as safety railing in special hazard areas. The railing system is made for casting in concrete or for plugging down and available with base plate.

Protective railing

steel tube 70 x 70 mm with top and cross bar steel tube 60 x 40 mm, height above ground: approx.1000 mm for assembling bolts







hot-dip galvanized



part no.

hot-dip galvanized and white coated with red reflecting stripes

Fixed post for casting in concrete

	FC	kg	part no.
end post for top and cross bar	A•	8.0	4270
middle post for top and cross bar	A•	8.5	4271
corner post for top and cross bar 90°	A•	8.5	4273







Fixed post for plugging down

with base plate 100 x 150 mm

ot-dip	galvanized	С

hot-dip galvanized and white coated with red reflecting stripes

hot-dip galvanized and white

coated with red reflecting stripes

	FC	kg	part no.	part no.
end post for top and cross bar	Α•	6.5	4270P	4270PB
middle post for top and cross bar	A•	7.0	4271P	4271PB
corner post for top and cross bar 90°	A•	7.0	4273P	4273PB

Cross bar

steel tube 60 x 40 mm including fastening bolts

		hot-dip galvanized				
ube length	FC	kg	part no.			

Tube length	FC	kg	part no.	part no.
800 mm	Α•	3.0	4208	4208B
1300 mm	A•	5.0	4213	4213B
1800 mm	В•	7.0	4218	4218B
2300 mm	В•	8.5	4223	4223B



The cross bars are simply placed in the brackets of the stationary post and bolted in place. (Suitable as temporary guard without bolts). Also available in yellow / black design; 186 see work site predection

Separating traffic lanes, sidewalks, etc. Installation is very simple: assemble, cast in concrete or plug down - that's it.

Protective railing

steel tube Ø 48 mm, variable plugging, height above ground: approx. 1000 mm





Fixed post for plugging down

with base plate 100 x 150 mm





hot-dip galvanized and white coated with red reflecting hot-dip galvanized stripes


part no.

448-80B

448-81B

448-815B

				•
	FC	kg	part no.	part no.
end post	A•	5.0	448-80P	448-80PB
middle post	A•	7.0	448-81P	448-81PB
corner post	Α•	9.0	448-815P	448-815PB

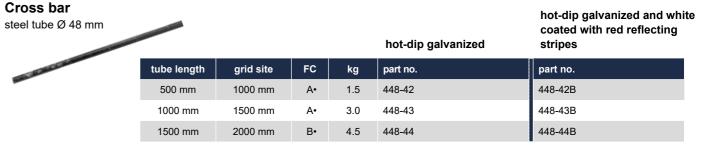



suitable mounting material see page 55, also available in yellow / black design, see page 207

hot-dip galvanized and


hot-dip galvanized and coated (RAL 7016)

Safety fencing

for exposed areas of danger



example of use:

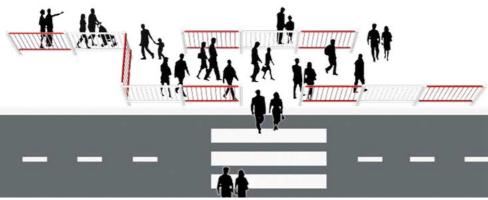



The fence panels are fixed to the vertical posts so as to allow setting at different degrees or angles. One edge of the panel fence cross bars always points upwards to avoid misuse.

Fence panel

40 x 40 mm square tube, with \emptyset 20 mm steel tube, welded rods, spacing between the vertical rods: 100 mm, height: 950 mm, total height assembled 1050 mm



		center spacing in mm	FC	kg	part no.
		750	В	16.5	418-07
	hot-dip galvanized	1500	В	23.0	418-15
		2000	В	31.0	4418-20
		750	В	16.5	418-07BW
	hot-dip galvanized and coated white	1500	В	23.0	418-15BW
	und couled winte	2000	В	31.0	4418-20BW
		750	Α	16.5	418-07BR
•	hot-dip galvanized and coated red	1500	В	23.5	418-15BR
	553104 104	2000	В	31.0	4418-20BR

Fixed post

of square tube 60×60 mm, with steel cap, for casting in concrete, total height: 1500 mm

Middle post with 4 connecting clips

	FC	kg	part no.	
hot-dip galvanized	В	6.0	418-00	
hot-dip galvanized and white coated	В	6.0	418-00B	

End post with 2 connecting clips

	FC	kg	part no.
hot-dip galvanized	В	6.0	418-02
hot-dip galvanized and white coated	В	6.0	418-02B



color variants, reflection classes, and customization, see pages 6 - 7



Safety railings

Content

are assembled from prefabricated parts on site. Hinge joints make the railings very flexible. The hinge joints can be positioned vertically and horizontally, up to 90°



Fixed post for top bar for casting in concrete

steel tube Ø 60 mm, with aluminium, ball head, total length: approx. 1500 mm

nm			hot-dip galvanized	coated (RAL 7016)
	FC	kg	part no.	part no.
end post for top bar	В	5.5	467-01	467-01B
middle post for top bar	В	5.4	467-02	467-02B
corner post for top bar	В	5.4	467-03	467-03B

Fixed post for top and cross bar

for casting in concrete

			hot-dip galvanized	coated (RAL 7016)
	FC	kg	part no.	part no.
end post for top and cross bar	В	5.4	467-11	467-11B
middle post for top and cross bar	В	5.4	467-12	467-12B
corner post for top and cross bar	В	5.4	467-13	467-13B

Fixed post for border railings for casting in concrete

steel tube Ø 60 mm, with aluminium ball head, total length: approx. 800 mm

	FC	kg	part no.	part no.
end post	В	2.9	467-04	467-04B
middle post	В	2.9	467-05	467-05B
corner post	В	2.9	467-06	467-06B

hot-dip galvanized

Cross bar for safety railing

or border railing, steel tube Ø 33.7 mm, length: 2000 mm, incl. aluminium connecting sockets for straight horizontal position

cross bar

aluminium jo

Aluminium joint

can be used up to 90°, for different slopes and angle positions



	hot-dip galvanized and
hot-dip galvanized	coated (RAL 7016)

	FC	kg	part no.	part no.
	В	5.5	467-20	467-20B
oint	В	0.5	467-24	467-24B




418-00

418-02

Security fencing at sport fields or other fencing where events are taking place.



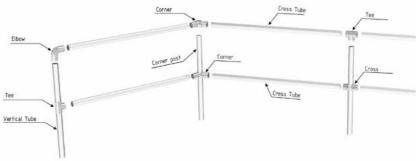

Content

Barrier

steel tube Ø 60 mm, hot-dip galvanized

	length in mm	FC	kg	part no.
vertical tube	1500	В	4.3	419-10
corner post	1500	В	4.3	419-105
cross tube	1500	В	4.3	419-11
	2000	В	5.8	419-12
	2500	С	7.2	419-13
	3000	С	8.6	419-14






	FC	kg	part no.
aluminium-elbow	A•	0.3	419-18
aluminium-tee	A•	0.3	419-19
aluminium-cross 2 half shells with 2 bolts and nuts	A•	0.2	419-09
aluminium-corner 2 half shells with 2 bolts and nuts	A•	0.4	419-08

Safety fence

for safety in areas of danger, embankments, river courses, enclosures, etc.




418-35

Fence panel element,

steel tube Ø 33.7 mm with Ø 16 mm rods and welded connecting clips, center spacing: 1500 mm, can be used approx. to 90°, height: 900 mm

	FC	kg	part no.
hot-dip galvanized	В	11.8	418-35
hot-dip galvanized and white coated	В	11.8	418-35B



Fixed post,

steel tube Ø 60 mm, total length: approx. 1500 mm

End post with 2 connecting clips

	FC	kg	part no.
hot-dip galvanized	В	5.5	418-42
hot-dip galvanized and white coated	В	5.5	418-42B

Middle post with 4 connecting clips

	FC	kg	part no.
hot-dip galvanized	В	5.5	418-44
hot-dip galvanized and white coated	В	5.5	418-44B

Traffic safety fencing systems – flexible and reliable!

Our traffic safety system secures traffic routes, separates lanes, and serves as personal safety and guidance system. Assembly on site is incredibly simple thanks to prefabricated elements, which can be easily exchanged if necessary. Installations can be made at all angles, as well as on slopes and inclines. Powder-coated in common RAL colors (see page 6 - 7).









hot-dip galvanized

hot-dip galvanized

hot-dip galvanized

419-625B

with cover

with ball head

Fixed post

steel tube Ø 60 mm, for casting in concrete with ground anchor

vitil ground anonor				not-dip garvanized	and write coated
	length in mm	FC	kg	part no.	part no.
with cover	1500	В	4.5	419-600	419-600B
with ball head	1500	В	4.5	419-602	419-602B

hot-din galvanized

Fixed post

steel tube Ø 60 mm, for plugging down with base plate 100 x 150 mm

h base plate 100 x 150) mm			hot-dip galvanized	and white coated
	length in mm	FC	kg	part no.	part no.
with cover	1000	Α	4.5	419-601	419-601B
with ball head	1000	Α	4.5	419-603	419-603B

Cross bar

steel tube Ø 60 mm, including connection element

ing connection element			hot-dip galvanized	and white coated		
grid sizes in mm	length in mm	FC	kg	part no.	part no.	
1130	1000	Α	4.5	419-610	419-610B	
1630	1500	В	5.5	419-615	419-615B	
2130	2000	В	6.5	419-620	419-620B	

419-625

8.0

Connection element

2500

(loose) for traffic protection system (clip, splay, plastic plates, bolts and nuts)

FC	kg	part no.	part no.
Α	4.5	419-601	419-699B
Α	4.5	419-603	419-699B



2500





Content



Turnstile with double-rod fence module for permanent installation, passage width: 600 mm, dimensions: 1216 x 1580 x 2270 mm

V-Turnstile-Compact-Fix

equipped with an electromechanical control unit, therefore expandable with access control systems

	FC	kg	part no.
hot-dip galvanized	В	252.0	4VTE60
galvanized and coated in RAL 7016	В	252.0	4VTE60B7016
galvanized and coated in RAL 6005	В	252.0	4VTE60B6005

V-Turnstile-Compact-Fix-Basic

equipped with a mechanical control unit, therefore not expandable with access control systems

	FC	kg	part no.
hot-dip galvanized	В	252.0	4VTM60
galvanized and coated in RAL 7016	В	252.0	4VTM60B7016
galvanized and coated in RAI 6005	R	252.0	4VTM60B6005

Turnstile with double-rod fence module for permanent installation, passage width: 850 mm, dimensions: 1833 x 2080 x 2270 mm

V-Turnstile-Fix

equipped with an electromechanical control unit, therefore expandable with access control systems

	FC	kg	part no.
hot-dip galvanized	В	286.0	4VTE85
galvanized and coated in RAL 7016	В	286.0	4VTE85B7016
galvanized and coated in RAL 6005	В	286.0	4VTE85B6005

V-Turnstile-Fix-Basic

equipped with a mechanical control unit, therefore not expandable with access control systems

	FC	kg	part no.
hot-dip galvanized	В	286.0	4VTM85
galvanized and coated in RAL 7016	В	286.0	4VTM85B7016
galvanized and coated in RAL 6005	В	286.0	4VTM85B6005



Door with double-rod fence module for permanent installation, passage width: 1290 mm, dimensions: 440 x 1580 x 2205 mm

V-Door-Compact-Fix

equipped with a electrical door closer, therefore expandable with access control systems

	FC	kg	part no.
hot-dip galvanized	В	108.0	4VDE13
galvanized and coated in RAL 7016	В	108.0	4VDE13B7016
galvanized and coated in RAL 6005	В	108.0	4VDE16B6005

V-Door-Compact-Fix-Basic

equipped with a mechanical door closer, therefore not expandable with access control systems

	FC	kg	part no.
hot-dip galvanized	В	108.0	4VDM13
galvanized and coated in RAL 7016	В	108.0	4VDM13B7016
galvanized and coated in RAI 6005	В	108.0	4VDM16B6005

Door with double-rod fence module for permanent installation, passage width: 1790 mm, dimensions: 440 x 1980 x 2205 mm

V-Door-Fix

equipped with an electric door closer, therefore expandable with access control systems

	FC	kg	part no.
hot-dip galvanized	В	127.0	4VDE18
galvanized and coated in RAL 7016	В	127.0	4VDE18B7016
galvanized and coated in RAL 6005	В	127.0	4VDE18B6005

V-Door-Fix-Basic

equipped with a mechanical door closer, therefore not expandable with access control systems

	FC	kg	part no.
hot-dip galvanized	В	127.0	4VDM18
galvanized and coated in RAL 7016	В	127.0	4VDM18B7016
galvanized and coated in RAL 6005	В	127.0	4VDM18B6005

Work site protection


for safety, perfect layout also for curved areas, hinged clips

Fixed post

70 x 70 mm square tube with steel cap, hot-dip galvanized and coated DB 703, height above ground: 1000 mm, for casting in concrete



with flat head	
kg	part no.
7.9	418-7804B
7.9	418-7802B



Content


Fence element

middle post

end post

horizontal steel tubes 30 x 30 mm, diagonal steel tubes 25 x 25 mm

center spacing in mm	FC	kg	part no.
1000	В	7.2	418-710B
1500	В	10.4	418-719B







The fence panels are fastened to the vertical post; the design of the fastening permits different degree and angle positions.


City fence

for safety in town, perfect layout, unobtrusive



City fence element

vertical steel tubes Ø 76 mm, horizontal steel tubes 30 x 30 mm, diagonal steel tubes 25 x 25 mm, total height: 1200 mm, hot-dip galvanized and powder-coated DB 703



	length in mm	FC	kg	part no.
with flat head	1000	В	18.0	418-7040B
with flat head	1500	В	21.0	418-7045B
with ball head	1000	В	18.0	418-7440B
with ball head	1500	В	21.0	418-7445B





color variants, reflection classes, and customization, see pages 6 - 7



CORD MALANZEN CONCORD

Safety barriers

a stable, attractive barrier to go with our post part-no. 478B



Fixed post

steel tube \varnothing 76 mm, with ball head, hot-dip galvanized and coated RAL 7016, total length: approx. 1300 mm

	FC	kg	part no.
end post with 2 connecting clips	Α	7.0	478-02B
middle post with 4 connecting clips	Α	7.0	478-04B
ground rosette bolts	Α	1.3	478RB

Frame element

steel tube Ø 33.7 mm, with welded-on connecting clips, center distance: 2000 mm (post center to post center), for use up to 90°



	FC	kg	part no.
hot-dip galvanized and coated RAL 7016	В	8.0	478-20B

Border railing with cross bar made of flat bar steel

approx. 500 mm above ground, hot-dip galvanized and coated green (RAL 6005), easy assembly and setup



Fixed post

steel tube Ø 60 mm, with ball head and socket, total length: approx. 800 m



	FC	kg	part no.
end post	Α	3.0	40673B
middle post	Α	3.0	40674B
corner post	Α	3.0	40675B

Flat bar steel

45 x 15 mm,


hot-dip galvanized and coated

total length in mm	FC	kg	part no.
1000	Α	5.5	40676B
1500	В	8.0	40677B
2000	В	10.5	40678B

Effective barriers for maximum safety

Barrier gates

Our barriers offer reliable protection for driveways, parking lots, footpaths and cycle paths. With various locking options and robust mechanisms, they ensure effective access control.

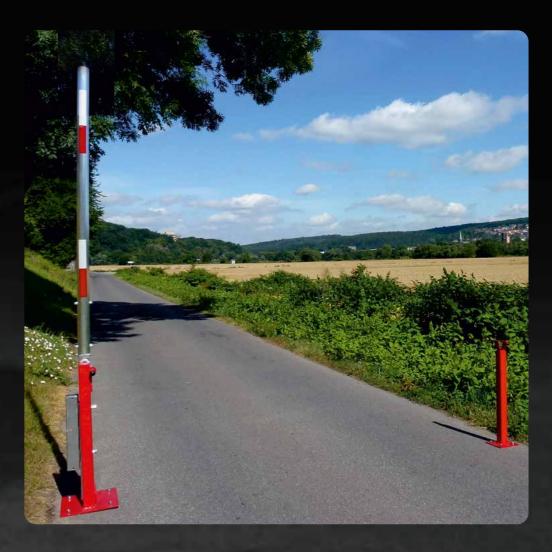



Barrier gates

Outdoor equipment

Work site protection

Car-park barriers

Rotating Barrier Gate -Flexible and Secure!

The horizontally swiveling gate operates without a support post and offers versatile applications. It can be securely locked in both open and closed positions using a locking pin. Additionally, it is designed for use with a padlock, a triangular lock according to DIN 3223 or a profile cylinder lock.



swiveling post: steel tube Ø 102 mm, barrier arm: steel tube Ø 60 mm, height: approx. 950 mm above ground

for casting in concrete hot-dip galvanized

with Euro for padlock with triangular lock profile cylinder lock


total width in mm	FC	kg	part no.	part no.	part no.
1500	В	33.0	413-151V	413-151F	413-151Z
2000	В	36.5	413-201V	413-201F	413-201Z
2500	С	40.0	413-251V	413-251F	413-251Z
3000	С	43.5	413-301V	413-301F	413-301Z
3500	С	47.0	413-351V	413-351F	413-351Z

for casting in concrete hot-dip galvanized and red coated with white reflecting rings

with Euro for padlock with triangular lock profile cylinder lock

total width in mm	FC	kg	part no.	part no.	part no.
1500	В	33.0	413-151VB	413-151FB	413-151ZB
2000	В	36.5	413-201VB	413-201FB	413-201ZB
2500	С	40.0	413-251VB	413-251FB	413-251ZB
3000	С	43.5	413-301VB	413-301FB	413-301ZB
3500	С	47.0	413-351VB	413-351FB	413-351ZB



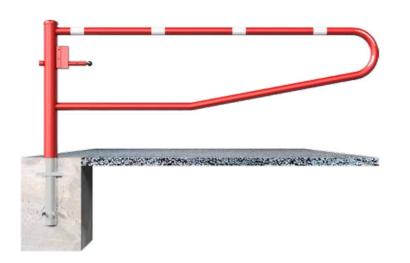

Optionally available with:

Base plate for plugging down:

360 x 360 x 8 mm including 4 holes Ø 21 mm, hole pitch 260 x 260 mm

add letter P to the part no.

Rotating Barrier -Reliable and Versatile!

The horizontally swing barrier operates without a support post and stands out for its easy handling. The bolt automatically locks into place, ensuring secure locking in four positions (every 90°). The barrier is designed for use with a padlock, a triangular lock according to DIN 3223 or a profile cylinder



swiveling post: steel tube Ø 102 mm, barrier arm: steel tube 60 x 40 mm, height: approx. 950 mm above ground


for casting in concrete hot-dip galvanized


for padlock with triangular lock profile cylinder lock

total width in mm	FC	kg	part no.	part no.	part no.
1500	В	33.0	4013-15V	4013-15F	4013-15Z
2000	В	37.0	4013-20V	4013-20F	4013-20Z
2500	С	41.0	4013-25V	4013-25F	4013-25Z
3000	С	44.5	4013-30V	4013-30F	4013-30Z
3500	С	48.0	4013-35V	4013-35F	4013-35Z

for casting in concrete hot-dip galvanized and white coated with red reflecting rings

for padlock with triangular lock profile cylinder lock total width in mm FC part no. part no. kg part no. 4013-15FB 4013-15ZB 1500 33.0 4013-15VB 4013-20ZB 2000 В 37.0 4013-20VB 4013-20FB 4013-25FB 2500 41.0 4013-25VB 4013-25ZB С 4013-30VB 4013-30FB 4013-30ZB 3000 44.5 48.0 4013-35VB 4013-35FB 4013-35ZB



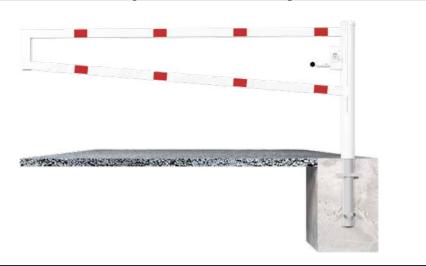

Optionally available with:

Base plate for plugging down:

360 x 360 x 8 mm including 4 holes Ø 21 mm, hole pitch 260 x 260 mm

add letter **P** to the part no.

with Euro

with Euro

with Euro

4113-30ZB

4113-35ZB

Swing barrier,

horizontally pivoting gate with cable reinforcement. Lockable in both open and closed positions using a bolt that secures in four positions (every 90°). Prepared for use with a padlock, a triangular lock according to DIN 3223 or a profile cylinder



4113-30FB

4113-35FB

swiveling post: steel tube \varnothing 102 mm, hot-dip galvanized and coated red, barrier arm: aluminium tube 100 x 50 mm, coated white with red reflecting stripes,

height: approx. 950 mm above ground

for casting in concrete

3000

3500

			for padlock	with triangular lock	profile cylinder lock
barrier arm in mm	FC	kg	part no.	part no.	part no.
1500	В	32.0	4113-15VB	4113-15FB	4113-15ZB
2000	В	33.0	4113-20VB	4113-20FB	4113-20ZB
2500	С	34.0	4113-25VB	4113-25FB	4113-25ZB

4113-30VB

4113-35VB

35.0


36.0

for more info scan the QR code





Recommended foundation dimensions: width: 550 x 550 mm depth: 900 mm

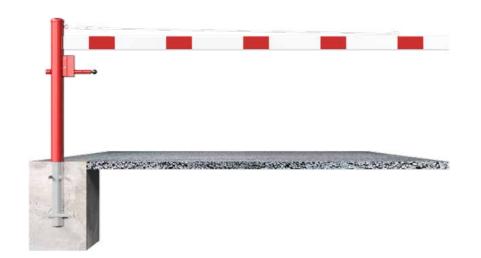

Optionally available with:

Base plate for plugging down:

360 x 360 x 8 mm including 4 holes Ø 21 mm, hole pitch 260 x 260 mm

add letter P to the part no.

Swing barrier,

can be swiveled horizontally, with bracing tube and pull rope reinforcement. Locking mechanism at the swiveling post closed or opened by pin locking in 4 positions (every 90°), fitted for a padlock or with triangular locking mechanism acc. to DIN 3223 or Euro profile cylinder lock, including two supporting posts.



swiveling post: steel tube \emptyset 102 mm, hot-dip galvanized and red coated,

barrier arm: aluminium tube 100 x 50 mm, coated white with red reflecting stripes,

supporting post: steel tube 70 x 70 mm, hot-dip galvanized and red coated (2 pieces),

height: approx. 950 mm above ground

for casting in concrete

			for padlock	with triangular lock	profile cylinder lock
barrier arm in mm	FC	kg	part no.	part no.	part no.
3000	С	58.0	4213-30VB	4213-30FB	4213-30ZB

barrier arm in mm	FC	kg	part no.	part no.	part no.
3000	С	58.0	4213-30VB	4213-30FB	4213-30ZB
3500	В	60.0	4213-35VB	4213-35FB	4213-35ZB
4000	D	62.0	4213-40VB	4213-40FB	4213-40ZB
4500	D	64.0	4213-45VB	4213-45FB	4213-45ZB
5000	D	66.0	4213-50VB	4213-50FB	4213-50ZB
5500	D	68.0	4213-55VB	4213-55FB	4213-55ZB
6000	D	70.0	4213-60VB	4213-60FB	4213-60ZB

for more info scan the QR code






Recommended foundation dimensions:

Swiveling post:

width 550 x 550 mm, depth 900 mm Supporting post:

width 400 x 400 mm, depth 900 mm

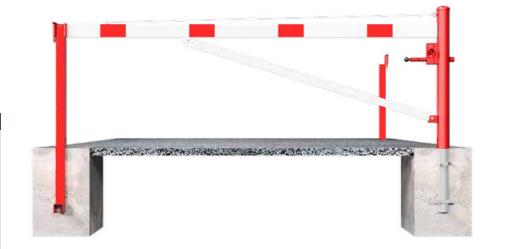

Optionally available with:

Base plate for plugging down:

1 x swiveling post base plate 360 x 360 x 8 mm, incl. 4 holes Ø 21 mm, hole pitch 260 x 260 mm, 2 x base plates for supporting post 220 x 220 x 8 mm, incl. 4 holes Ø 21 mm, hole pitch 140 x 140 mm

add letter P to part no.

with Euro

supporting post: steel tube 70 x 70 mm with ground plate 220 x 220 x 8 mm, incl. 4 holes Ø 20 mm for anchors,

Content

total width: clear width + approx. 900 mm, height: approx. 950 mm above ground

Access barrier

powder-coated red.

Main support: steel construction


plate 360 x 360 x 8 mm for plugging

down, incl. 4 holes Ø 20 mm for

anchors, hot-dip galvanized and

				for padlock	with triangular lock	with Euro profile cylinder lock
C	clear width in mm	FC	kg	part no.	part no.	part no.
	3000	С	74.0	411-30VPB	411-30FPB	411-30ZPB
	4000	D	76.0	411-40VPB	411-40FPB	411-40ZPB
	5000	D	100.5	411-50VPB	411-50FPB	411-50ZPB
	6000	D	124.5	411-60VPB	411-60FPB	411-60ZPB
	7000	D	125.5	411-70VPB	411-70FPB	411-70ZPB

	FC	kg	part no.
set of mounting bolts type 3 to be fixed by plugs	A•	0.4	470-73
set of ground sockets with ground anchor plate for main and supporting posts, for casting in concrete, hot-dip galvanized, including bolts M16	A•	17.5	411-92
pull rope reinforcement	Α	0.5	411-95

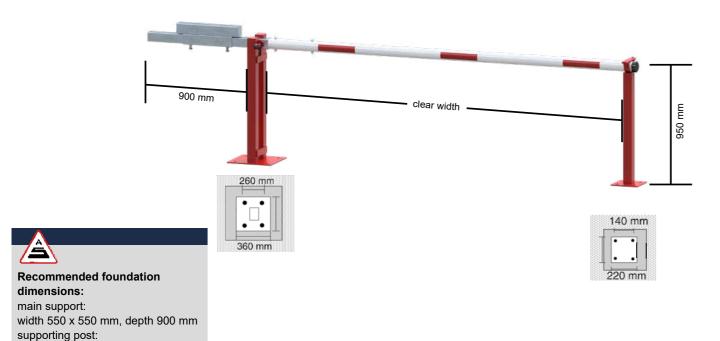



anchors, hot-dip galvanized and

barrier arm: thick-walled Ø 80 mm aluminium tube with counterweight, white coated with red reflecting stripes,

swing post: at the main support with a locking pin, for fixing the arm in open or closed position,

total width: clear width + approx. 900 mm, height: approx. 950 mm above ground

Access barrier

powder-coated red.


Main support: steel construction

down, incl. 4 holes Ø 20 mm for

plate 360 x 360 x 8 mm for plugging

			for padlock	with triangular lock	with Euro profile cylinder lock
clear width in mm	FC	kg	part no.	part no.	part no.
3000	С	66.0	411-31VPB	411-31FPB	411-31ZPB
4000	D	90,0	411-41VPB	411-41FPB	411-41ZPB
5000	D	114.0	411-51VPB	411-51FPB	411-51ZPB
6000	D	117.0	411-61VPB	411-61FPB	411-61ZPB
7000	D	140.0	411-71VPB	411-71FPB	411-71ZPB

	FC	kg	part no.
set of mounting bolts type 2 to be fixed by plugs	A•	0.2	470-72
ground socket with ground anchor plate for main support, for casting in concrete, hot-dip galvanized, including bolts M16	A•	12.5	411-91
pull rope reinforcement	Α	0.5	411-95

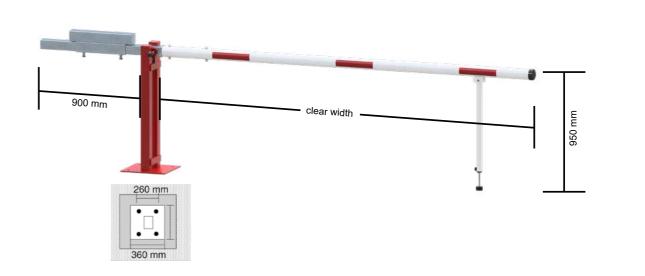

width 400 x 400 mm, depth 900 mm

Manual barrier

with pneumatic spring and fixed pole support

Main support: steel construction 120 x 80 mm square tube with base plate 360 x 360 x 8 mm for plugging down, incl. 4 holes Ø 20 mm for anchors, hot-dip galvanized and powder-coated red, barrier arm can be fixed in open and closed



supporting post: steel tube 70 x 70 mm with base plate 220 x 220 x 8 mm, incl. 4 holes Ø 20 mm for anchor,

barrier arm: thick-walled Ø 80 mm aluminium tube, powder-coated white with red reflecting stripes,

locking mechanism: at the post support, total width: clear width + approx. 180 mm, height: approx. 950 mm above ground

			for padlock	with triangular lock	profile cylinder lock
clear width in mm	FC	kg	part no.	part no.	part no.
3000	С	48.5	415-30VPB	415-30FPB	415-30ZPB
4000	D	51.5	415-40VPB	415-40FPB	415-40ZPB
5000	D	54.0	415-50VPB	415-50FPB	415-50ZPB
6000	D	57.0	415-60VPB	415-60FPB	415-60ZPB
7000	D	60.0	415-70VPB	415-70FPB	415-70ZPB

triangular locking mechanism and Euro profile cylinder lock at the main


double profile cylinder lock on the

with Euro

Content

clear width in mm	FC	kg	part no.	part no.
3000	C•	54.0	415-30FZPB	415-30ZZPB
4000	D•	57.0	415-40FZPB	415-40ZZPB
5000	D•	60.0	415-50FZPB	415-50ZZPB
6000	D•	62.5	415-60FZPB	415-60ZZPB
7000	D•	64.0	415-70FZPB	415-70ZZPB

	FC	kg	part no.
set of mounting bolts type 3 to be fixed by plugs	A•	0.4	470-73
set of ground sockets with ground anchor plate for main and supporting posts, for casting in concrete, hot-dip galvanized, including bolts M16	Α•	17.5	415-92
pull rope reinforcement	Α	0.5	415-95

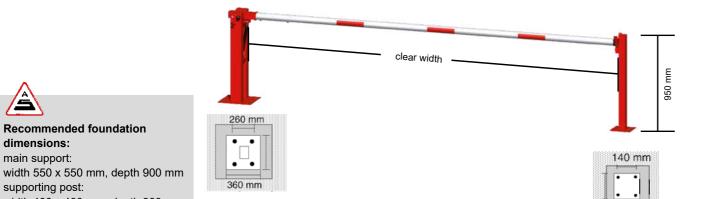

Manual barrier

with pneumatic spring and swing post

Main support: steel construction 120 x 80 mm square tube with base plate 360 x 360 x 8 mm for plugging down, incl. 4 holes Ø 20 mm for anchors, hot-dip galvanized and powder-coated red, barrier arm can be fixed in open and closed position,



barrier arm: thick-walled Ø 80 mm aluminium tube, powder-coated white with red reflecting stripes,

locking mechanism: at the main support, total width: clear width + approx.180 mm


			for padlock	with triangular lock	with Euro profile cylinder lock
clear width in mm	FC	kg	part no.	part no.	part no.
3000	С	45.5	415-31VPB	415-31FPB	415-31ZPB
4000	D	48.0	415-41VPB	415-41FPB	415-41ZPB
5000	D	51.0	415-51VPB	415-51FPB	415-51ZPB
6000	D	52.0	415-61VPB	415-61FPB	415-61ZPB
7000	D	55.0	415-71VPB	415-71FPB	415-71ZPB

triangular locking mechanism and Euro profile cylinder lock at the main

double profile cylinder lock on the

clear width in mm	FC	kg	part no.	part no.
3000	C•	46.5	415-31FZPB	415-31ZZPB
4000	D•	49.5	415-41FZPB	415-41ZZPB
5000	D•	51.5	415-51FZPB	415-51ZZPB
6000	D•	54.5	415-61FZPB	415-61ZZPB
7000	D•	56,5	415-71FZPB	415-71ZZPB


	FC	kg	part no.
set of mounting bolts type 2 to be fixed by plugs	A•	0.2	470-72
ground socket with ground anchor plate for main support, for casting in concrete, hot-dip galvanized, including bolts M16	Α•	12.5	415-91
Euro profile cylinder lock with forced closing	A•	0.5	415-96
pull rope reinforcement	Α	2.5	415-95

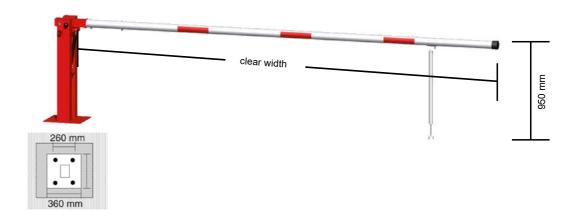

Recommended foundation

dimensions:

main support:

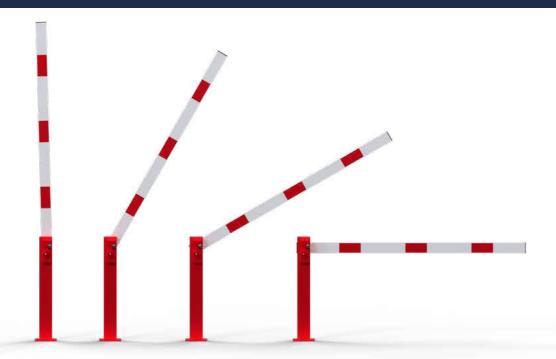

Compact hand barrier with gas spring.

Main support: Steel construction made of 120 x 80 mm square tube with a 200 x 200 mm base plate for plugging down, including 4 holes (Ø 20 mm) for anchors. Hot-dip galvanized and powder-coated in signal colors with reflective stripes.

barrier arm: heavy-duty aluminum tube 100 x 20 mm, powder-coated in white with red reflective stripes, **features:** vertically opening, easy to operate, high visibility due to signal colors and reflective stripes, **height:** approx. 950 mm above ground

hot-dip galvanized and coated in white / red

for padlock with triangular lock profile cylinder lock


clear width in mm	FC	kg	part no.	part no.	part no.
1500	В	17.0	4011-151VPB	4011-151FPB	4011-151ZPB
2000	В	17.5	4011-201VPB	4011-201FPB	4011-201ZPB
2500	С	18.0	4011-251VPB	4011-251FPB	4011-251ZPB

hot-dip galvanized and coated in yellow / black

with Euro adlock with triangular lock profile cylinder lock

clear width in mm	FC	kg	part no.	part no.	part no.
1500	В	17.0	4011-151VPBG	4011-151FPBG	4011-151ZPBG
2000	В	17.5	4011-201VPBG	4011-201FPBG	4011-201ZPBG
2500	С	18.0	4011-251VPBG	4011-251FPBG	4011-251ZPBG



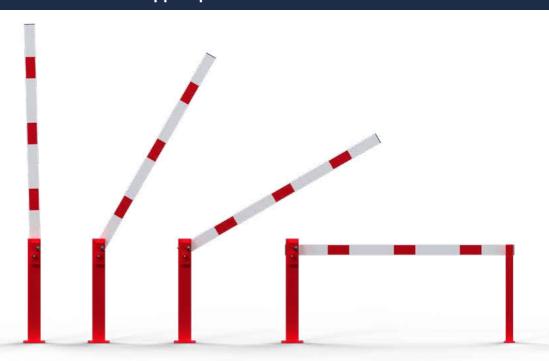

Compact hand barrier with gas spring and fixed support post.

Main support: Steel construction made of 120 x 80 mm square tube with a 200 x 200 mm base plate for plugging down, including 4 holes (Ø 20 mm) for anchors. Hot-dip galvanized and powder-coated in signal colors with reflective stripes.

support post: Steel tube 70 x 70 mm with 200 x 200 mm base plate, including 4 holes (Ø 20 mm) for anchors,

barrier arm: Aluminum tube 100 x 20 mm, powder-coated in white with red reflective stripes,

features: Vertically opening, easy to operate, high visibility due to signal colors and reflective stripes,

height: approx. 950 mm above ground

hot-dip galvanized and coated in white / red			with Euro
	for padlock	with triangular lock	profile cylinder lock

clear width in mm	FC	kg	part no.	part no.	part no.
1500	В	22.5	4011-150VPB	4011-150FPB	4011-150ZPB
2000	В	23.0	4011-200VPB	4011-200FPB	4011-200ZPB
2500	С	23.5	4011-250VPB	4011-250FPB	4011-250ZPB

hot-dip galvanized and coated in yellow / black

with Euro
for padlock with triangular lock profile cylinder lock

clear width in mm	FC	kg	part no.	part no.	part no.
1500	В	22.5	4011-150VPBG	4011-150FPBG	4011-150ZPBG
2000	В	23.0	4011-200VPBG	4011-200FPBG	4011-200ZPBG
2500	С	23.5	4011-250VPBG	4011-250FPBG	4011-250ZPBG



Swing barrier

barrier can be swiveled horizontally, with two supporting posts. Locking mechanism at the opened or closed barrier at the respective supporting post, fitted for a padlock, triangular locking mechanism acc. to DIN 3223 or Euro profile cylinder lock.

swiveling post: steel tube Ø 102 mm, barrier arm: steel tube 60 x 40 mm, height: approx. 950 mm above ground

supporting post: steel tube 70 x 70 mm,

for casting in concrete, hot-dip galvanized

with Euro for padlock with triangular lock profile cylinder lock


clear width in mm	FC	kg	part no.	part no.	part no.
2500	С	53.0	413-250V	413-250F	413-250Z
3000	С	56.0	413-300V	413-300F	413-300Z
3500	D	59.5	413-350V	413-350F	413-350Z
4000	D	62.5	413-400V	413-400F	413-400Z
4500	D	65.0	413-450V	413-450F	413-450Z


for casting in concrete, hot-dip galvanized and coated red with white reflecting stripes

for padlock with triangular lock

with Euro profile cylinder lock

clear width in mm	FC	kg	part no.	part no.	part no.
2500	С	53.0	413-250VB	413-250FB	413-250ZB
3000	С	56.0	413-300VB	413-300FB	413-300ZB
3500	D	59.5	413-350VB	413-350FB	413-350ZB
4000	D	62.5	413-400VB	413-400FB	413-400ZB
4500	D	65.0	413-450VB	413-450FB	413-450ZB



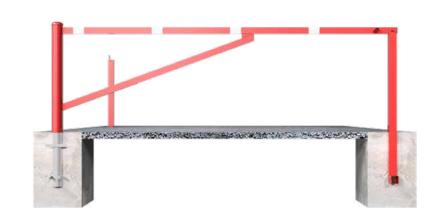

Optionally available with:

Base plate for plugging down:

1 x swiveling post base plate 360 x 360 x 8 mm, incl. 4 holes Ø 21 mm, hole pitch 260 x 260 mm, 2 x base plates for supporting post 220 x 220 x 8 mm, incl. 4 holes Ø 21 mm, hole pitch 140 x 140 mm

add letter P to part no.

Safety and modern design for public spaces

Outdoor equipment

Our outdoor equipment includes bicycle racks, barriers and more developed for functionality and design.



















Scooter racks • Bicycle stands / lean-on hoops • Bollard luminaires • Laundry drying stands • Litter bins • Planters

with lockable rings for padlock, square tube cross bar 40 x 40 mm, total width: 1500 mm, for 5 places, stand tube to be fixed by screws, height: approx. 500 mm above ground, hot-dip galvanized





	FC	kg	part no.
for casting in concrete	Α	13.0	421-92
to be fixed by plugs	Α	13.0	421-94
for wall mounting	Α	11.0	421-96

Scooter - serial parking hoop

with lockable rings for padlock, height: approx. 500 mm above ground, hoop made of steel tube Ø 48 mm, total width: 1500 mm, for 5 places, total height: approx. 1000 mm, above ground, hot-dip galvanized



for more info scan the QR code



	FC	kg	part no.
for casting in concrete	В	15.0	421-98
to be fixed by plugs	В	15.0	421-99

Individual stands

Bicycle rack

stand of Ø 12 mm round steel welded to vertical tube 40 x 40 mm, height: approx. 500 mm above ground, hot-dip galvanized





for casting in concrete

	FC	kg	part no.
one-side parking	Α•	2.5	421-51
two-side parking	A•	4.0	421-52



for plugging down

base plate 100 x 150 mm, 4 holes Ø 10 mm

	FC	kg	part no.
one-side parking	Α•	2.5	421-53
two-side parking	A•	4.0	421-54





for wall mounting

	FC	kg	part no.
straight positioning 90°	A•	1.5	421-55
angled positioning 45°	A•	2.5	421-56



Individual stand

made of Ø 20 mm round steel, hot-dip galvanized, height: approx. 530 mm, above ground

Individual stand


	FC	kg	part no.
for casting in concrete	A•	4.0	421-60

Bicycle rack – serial parking sturdy and weatherproof parking rack made of Ø 12 mm

round steel with welded square tube strut 40 x 40 mm,

vertical tube can be fixed by bolts, height: approx. 500 mm above ground, for bicycle wheel width up to 55 mm, hot-dip galvanized



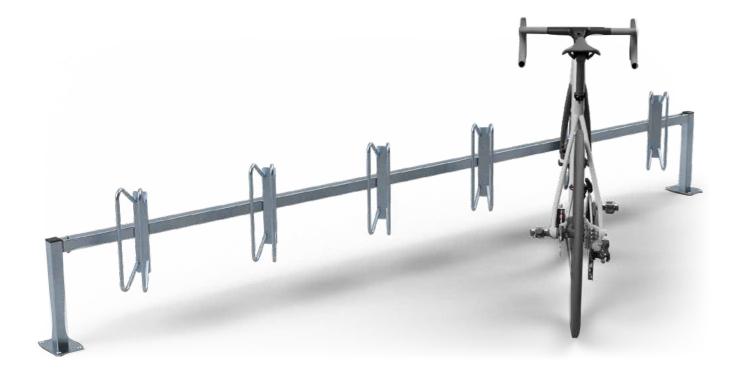

model	freestanding for casting		freestanding for plugg	construction ing down	wall brackets for plugging on	
element length in mm	30	00	30	00	3000	
total length in mm with vertical tube approx. mm	3100 one-side		3100 one-side		3100 one-side	
bicycle positioning	straight 90°	left or right 45°	straight 90°	left or right 45°	straight 90°	left or right 45°
number of spaces	6	6	6	6	6	6
spacing mm	500	500	500	500	500	500
depth of stand approx. mm	2000	1600	2000	1600	2000	1600
part no.	421-02	421-03	421-04	421-05	421-16	421-17
kg	21.0	21.0	20.0	20.0	18.0	18.0
FC	C•	C•	C•	C•	C•	C•

A visually appealing bicycle stand, easy to set up:

- simple installation
- double-sided use possible
- durable due to hot-dip galvanizing and optional coating

Bicycle stand for row installation:

- frame made of square tube
- hoop 19 mm round tube
- height: approx. 330 mm alternating high / low position
- Bicycle tire width up to 55 mm
- depth ca. 500 mm





galvanized

hot-dip galvanized, coated RAL 9005

	FC	kg	part no.	part no.
2 bicycles 750 mm	В	7.0	421-20	421-20B
3 bicycles 1050 mm	В	9.5	421-30	421-30B
4 bicycles 1400 mm	В	12.0	421-40	421-40B



Bicycle stand with support bracket

made of 60 x 40 mm steel tube, with support bracket, width: 500 mm, height: 800 mm

hot-dip galvanized, coated RAL 9005

	FC	kg	part no.	part no.
2 bicycles 700 mm	В	14.0	421-20H	421-20HB
4 bicycles 1400 mm	В	26.5	421-40H	421-40HB



Bicycle stand as e-bike support bracket

made of steel tube, including 230V power outlet, width: 500 mm, height: 800 mm

galvanized

hot-dip galvanized, coated RAL 9005

	FC	kg	part no.	part no.
2 bicycles 700 mm	В	14.0	421-20HE	421-20HBE
4 bicycles 1400 mm	В	26.5	421-40HE	421-40HBE

Car-park barriers

Sturdy and space-saving due to alternating high and low racks. Racks can be bolted to form a serial system, with boreholes for anchoring or plugging.

Bicycle parking rack

frame of angular section hoop 19 mm round tube, height: approx. 510 mm, alternating high and low racks, bicycle wheel width up to 55 mm, low rack one side: approx. 500 mm, two-side depth: approx. 600 mm





one-sided rack, hot-dip galvanized space between bicycles 350 mm

		length in mm	FC	kg	part no.
	2 bicycles	750	В	9.5	420-20
	3 bicycles	1050	В•	10.5	420-30
6.5	4 bicycles	1400	В•	14.5	420-40
-	5 bicycles	1750	В•	16.5	420-50
	6 bicycles	2100	В•	20.0	420-60



two-sided rack, hot-dip galvanized

	length in mm	FC	kg	part no.
2 x 3 bicycles	1050	В	16.0	420-32
2 x 5 bicycles	1750	В	26.0	420-52
2 x 6 bicycles	2100	В	32.0	420-62



one-sided rack 45° left, hot-dip galvanized

	length in mm	FC	kg	part no.
2 bicycles	1130	В	10.0	420-20-45L
3 bicycles	1695	В	14.5	420-30-45L
4 bicycles	2260	В	19.5	420-40-45L



one-sided rack 45° right, hot-dip galvanized

	length in mm	FC	kg	part no.
2 bicycles	1130	В	10.0	420-20-45R
3 bicycles	1695	В	14.5	420-30-45R
4 bicycles	2260	В	19.5	420-40-45R

Bicycle stand with lean-on hoop

frame of angular section, hoop Ø 19 mm round tube, high and low rack bicycle, wheel width up to 55 mm, lean-on hoop Ø 26.9 mm round tube, with reinforced side and eyelet, hoop with plastic coating, height: approx. 850 mm, depth: approx. 950 mm



picture: 2 racks 420-20H

one-sided rack, hot-dip galvanized

with lean-on hoop, space between bicycles 350 mm

	length in mm	FC	kg	part no.
2 bicycles	700	В•	15.0	420-20H
4 bicycles	1400	В	30.0	420-40H
6 bicycles	2100	В	45.0	420-60H

Design Bicycle Rack

A visually appealing and easy-to-install bicycle rack.

- suitable for various tire widths, three slot widths: 45 mm / 55 mm / 65 mm
- · can be used from both sides
- durable thanks to hot-dip galvanization and optional coating

Frame Tube Ø 89 mm Rack Bracket for Wheel Positioning Ø 26.9 mm

height: approx. 250 mm depth: approx. 600 mm with mounting brackets for bolting down



		hot-dip galvanized	coated DB 703
FK	kg	part no.	part no.
В	36.0	4020-15	4020-15B

Lean-on hoop for bicycles

rack made of square tube 80 x 80 mm, with hoops to be screwed on, made of square tube 60 x 40 mm, with base plates, for plugging down, hot-dip galvanized, total height: approx. 950 mm, hoop spacing: approx. 700 mm



depth (bicycle positioning 90°): approx. 1500 mm


Angle of mounting these hoops at your choice, if mounted lean-on hoop in an angle of 45° to the rack, the depth reduces to approx. 1100 mm.

	length in mm	FC	kg	part no.
2 bicycles	1400	В	41.0	4022-20
3 bicycles	2100	В	53.5	4022-30
4 bicycles	2800	В	66.0	4022-40

Lean-on hoop for bicycles

consisting of 3 lean-on hoops, made of steel tube Ø 48 mm, welded on flat steel 60 x 8 mm, length: 1800 mm, hot-dip galvanized, with bores for bolting down, total width: approx. 700 mm, hoop spacing: approx. 750 mm, height: approx. 700 mm.

Flexibly positionable optionally in a straight or angled position with the screwable version



	1	
-		-
1		



	FC	kg	part no.
welded	В•	31.0	422-30
screwed	В•	31.0	422-31



the QR code

For more info scan



with guide rails for screwing on hoops,

height: 800 mm, hoop spacing: 700 mm, hot-dip galvanized

2 bicycles

3 bicycles

4 bicycles



FC

В•

B•

C•

Hoop of steel tube

Ø 48 mm, width: 800 mm

	hot-dip galvanized	hot-dip galvanized and coated DB 703
kg	part no.	part no.
22.5	423-20	423-20B
34.0	423-30	423-30B

423-40B

hot-dip galvanized and coated DB 703

hot-dip galvanized and coated DB 703



length in mm 1400

2100

2800

Hoop of steel tube 60 x 60 mm, width: 800 mm

vidth: 800 mm				hot-dip galvanized	coated DB 703
	length in mm	FC	kg	part no.	part no.
2 bicycles	1400	В•	26.5	424-20	424-20B
3 bicycles	2100	В•	40.0	424-30	424-30B
4 higyeles	2800	C•	53.5	424.40	424 40B

45.0

423-40



Hoop of flat steel 50 x 12 mm, width: 800 mm

	length in mm	FC	kg	part no.	part no.
2 bicycles	1400	В•	32.5	425-20	425-20B
3 bicycles	2100	В•	49.0	425-30	425-30B
4 bicvcles	2800	C•	65.0	425-40	425-40B

hot-dip galvanized



Round hoop of steel tube Ø 48 mm,


width: 460 mm

hot-dip galvanized and coated DB 703 hot-dip galvanized

	length in mm	FC	kg	part no.	part no.
2 bicycles	1400	В•	20.5	426-20	426-20B
3 bicycles	2100	В•	30.5	426-30	426-30B
4 bicycles	2800	C•	40.5	426-40	426-40B

Work site protection

With this lean-on hoop you will create an exceptional added value for your customers. You offer a practical securing of the bike and the E-bikes can be charged during your stay with their own charger.

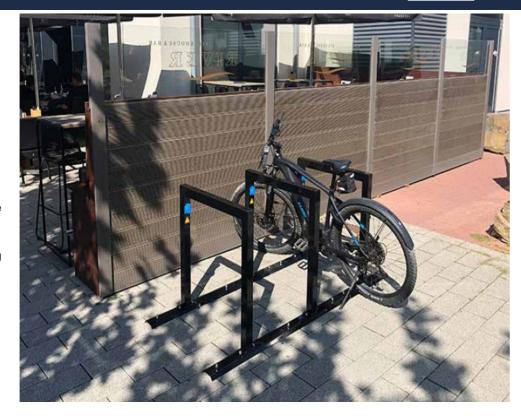

E-bike lean-on hoop

Lean-on hoop made of hot-dip galvanized and powder-coated steel square tube incl. IP 67 output socket 230V with protective cover.

3 row system

bicycle stand as row system, with rail system for steel tube lean-on hoops (60 x 60 mm), to be screwed on, height: 800 mm, width: 800 mm, space between bicycles: 700 mm, hot-dip galvanized and black coated



	FC	kg	part no.
without lockable loading boxes	В•	40.0	424-30BE
with 3 lockable loading boxes	В•	40.0	424-30BEL




Optional highlight:

with practical lockable charging box for all common E-Bike chargers simply lockable by chain lock, spiral cable lock, etc., blue coated

E-bike lean-on hoop

Lean-on hoop made of hot-dip galvanized and powdercoated steel square tube incl. IP 54 output socket 230V with protective cover.



Single hoop

E-bike lean-on hoop with charging station including IP 54 output socket 230V, with protective cover, with lockable charging box, as single hoop made of square tube 100 x 100 mm / 60 x 60mm width: 800 mm,

total height: 800 mm, with base plates for plugging down, hot-dip galvanized and black coated



	FC	kg	part no.
without lockable loading boxes	В•	15.5	454-080PBE
with 3 lockable loading boxes	В•	15.5	454-080PBEL



matching accessories for this product: plug lock part no.

- protection against energy theft
- with two keys
- · easy mounting



for more info scan the QR code

Advertising medium and customer service combined! Customize your exclusive bicycle rack with your advertisment stickers on the free advertising space or order an individual advertising sign.



Mobile bicycle rack with advertising panel

optionally with charging station for electric bikes, including fixing devices to ensure the stability of the bikes, with transport wheels, tire widths 6 x up to 55 mm, 3 x up to 45 mm, galvanized, coated in RAL 9005



	FC	kg	part no.
basic model without plugs	В	32.0	420-80B
model E with 3 x IP54 sockets, 2 x scooter charger holder	В	40.0	420-80BE
advertising sign 1230 x 254 mm printed individually according to your printable file	В	2.0	4W-80

Mobile scooter rack with display panel

optionally with scooter charging station, 6 galvanized parking spaces, coated in RAL 9005



	FC	kg	part no.
basic model without plugs	В	22.0	420-90B
model E with 3 x IP54 sockets, 2 x scooter charger holder	В	32.0	420-90BE
advertising sign 1230 x 254 mm printed individually according to your printable file	В	2.0	4W-80



for more info scan the QR code

Stylish, universally applicable. This bicycle rack can be used as a lean-on or as a bicycle parker.

Bicycle racks

square tube 80 x 80 mm, height: 800 mm

Single parking space, to be fixed by plugs with base plate 150 x 150 mm

with side hoops made of round tube Ø 48 mm

	FC	kg	part no.
hot-dip galvanized	Α	11.5	40880
hot-dip galvanized and matt black coated	А	11.5	40880B



Single parking space, to be fixed by plugs

with base plate 150 x 150 mm, with side brackets in square tube 40 x 40 mm

	FC	kg	part no.
hot-dip galvanized	Α	11.5	40881
hot-dip galvanized and matt black coated	Α	11.5	40881B

Bicycle racks

made of square tube 80 x 20 x 2 mm, height: 800 mm, width: 95 mm

Single parking space, to be fixed by plugs with base plate 150 x 150 mm

	FC	kg	part no.
hot-dip galvanized	A•	7.0	458-95P
hot-dip galvanized and matt black coated	А	7.0	458-95PB





simple installation, high stability

Easy parking of bicycles, theft proof locking,

Lean-on hoop

easy and safe bicycle rack



Lean-on hoop

for casting in concrete, steel tube Ø 42 mm,

stand opening approx. 170 mm, total width approx. 250 mm, total length approx. 1600 mm, total height approx. 800 mm

	FC	kg	part no.
hot-dip galvanized	В	9.0	422-01



Bicycle lean-on hoop

steel tube Ø 48 mm, total width: approx. 1400 mm, height above ground: approx. 850 mm



for casting in concrete

	FC	kg	part no.
hot-dip galvanized	В•	9.0	422-50
hot-dip galvanized and coated DB 703	В	9.0	422-50B


for plugging down

with base plate \varnothing 150 mm and three \varnothing 14 mm holes

	FC	kg	part no.
hot-dip galvanized	В	8.0	422-51
hot-dip galvanized and coated DB 703	В	8.0	422-51B



steel tube Ø 60 x 2.5 mm, with cross tubes Ø 42 x 2.5 mm, total width: 800 mm,



with flat head, for casting in concrete

	FC	kg	part no.
hot-dip galvanized	В	12.8	422-60
hot-dip galvanized and coated DB 703	В	12.8	422-60B



with ball head, for casting in concrete

	FC	kg	part no.
hot-dip galvanized	В	13.2	422-61
hot-dip galvanized and coated DB 703	В	13.2	422-61B



Lean-on hoop

for casting in concrete, can be used on both sides vertical steel tubes Ø 60 mm, tubular frame Ø 48 mm, completely welded,

total length: 1425 mm,

height above ground: approx. 900 mm

	FC	kg	part no.
hot-dip galvanized	В	19.1	422-10

base plate 100 x 150 mm (the total height changes to 800 mm) add the letter **P** to the part-no.

without backrest

with backrest

hot-dip galvanized and

Modern design meets durable materials:

This series combines elegantly crafted steel with premium Kambala wood, offering high comfort for both public and private outdoor spaces. Weather-resistant, stable, and timeless

Park Bench

Seating bench with a frame made of flat steel 80 x 10 mm, hot-dip galvanized and coated in DB 703, wood slats 80 x 40 mm made of weather-resistant hardwood (Kambala, FSC-certified)

width: 1800 mm seat height: 450 mm seat depth: 420 mm

Delivery condition: Pre-assembled, easy final assembly on-site


Flat bar steel hoop with wooden cover

80 x 12 mm, width: 750 mm,

height: 1200 mm,

coated DB 703

hot-dip galvanized,

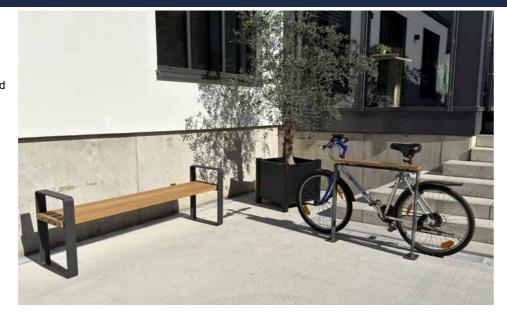

Content

part no.

4B118HB

4B118RB





FC

В

50.0

55.0

	FC	kg	part no.
for casting in concrete	В	25.0	4H52-075B
to be fixed by plugs	В	20.5	4H52-075BP

Flat bar Steel

made of steel tube, 70 x 10 mm, hot-dip galvanized and optionally powder-coated in DB 703, bent with a 10 mm radius



for casting in concrete total height: 1100 mm

without cross bar			hot-dip galvanized	coated DB 703
total width in mm	FC	kg	part no.	part no.
600	В•	15.0	4257-060	4257-060B
800	В•	16.5	4257-080	4257-080B



hot-dip galvanized and coated DB 703 hot-dip galvanized with cross bar total width in mm kg part no. part no. 4258-060B 600 18.0 4258-060 800 19.5 4258-080 4258-080B



Indentation inward



to be fixed by plugs total height: 800 mm

800

without cross bar				hot-dip galvanized	hot-dip galvanized and coated DB 703	
	total width in mm	FC	kg	part no.	part no.	
	600	В•	15.0	4257-060PI	4257-060PIB	
	800	В•	16.5	4257-080PI	4257-080PIB	

K	70		7	
	1/4			
		-	V	

hot-dip galvanized and coated DB 703 with cross bar hot-dip galvanized part no. total width in mm FC kg part no. 600 18.0 4258-060PI 4258-060PIB B•

4258-080PIB

B• 18.5 4258-080PI

Work site protection

hot-dip galvanized and



Content

Lean-on hoop

made of steel tube, for casting in concrete, hot-dip galvanized and optionally powder-coated in DB 703, total height: approx. 1200 mm

Square tube 80 x 20 mm



witho	out cross bar			hot-dip galvanized	coated DB 703
t	total width in mm	FC	kg	part no.	part no.
	450	В•	8.5	458-045	458-045B
	750	В•	9.5	458-075	458-075B
	1000	В•	10.0	458-100	458-100B

with cross bar			hot-dip galvanized	hot-dip galvanized and coated DB 703
total width in mm	FC	kg	part no.	part no.
450	٧•	10.0	459-045	459-045B
750	В•	11.5	459-075	459-075B
1000	В•	13.0	459-100	459-100B




total width in mm FC kg part no. part no. 450 V 10.0 459-145 459-145B 750 B 11.5 459-175 459-175B
750 R 11.5 459-175 459-175R
700 5 11.0 400 170
1000 B 13.0 459-110 459-110B



Lean-on hoop

made of steel tube, for casting in concrete, hot-dip galvanized and optionally powder-coated in DB 703, total height: approx. 1200 mm





without cross bar			hot-dip galvanized	hot-dip galvanized and coated DB 703
Total width	FC	kg	part no.	part no.
450	٧•	10.0	454-045	454-045B
750	В•	11.0	454-075	454-075B
1000	В•	11.5	454-100	454-100B



with cross bar			hot-dip galvanized	coated DB 703
Total width	FC	kg	part no.	part no.
450	В•	11.0	455-045	455-045B
750	В•	13.0	455-075	455-075B
1000	В•	15.0	455-100	455-100B

Square tube 60 x 40 mm



with cross bar			hot-dip galvanized	hot-dip galvanized and coated DB 703
Total width	FC	kg	part no.	part no.
450	В•	10.0	456-045	456-045B
750	В•	11.5	456-075	456-075B
1000	В•	12.5	456-100	456-100B



h cross bar	hot-dip galvanized	hot-dip galvanized and coated DB 703

Total width	FC	kg	part no.	part no.
450	В•	12.0	457-045	457-045B
750	В•	14.0	457-075	457-075B
1000	В•	16.0	457-100	457-100B

Also available with:

base plate 100 x 150 mm (the total height changes to 800 mm) add the letter **P** to the part-no.

Lean-on hoopof flat bar steel, for casting in concrete,

hot-dip galvanized and optionally powder-coated in DB 703, total height: approx. 1200 mm



Content

hot-dip galvanized and coated DB 703

part no.

452-045B 452-075B

452-100B



of flat bar steel, curved layout, for casting in concrete hot-dip galvanized and optionally powdercoated in DB 703, over all height: approx. 1200 mm



Flat bar steel 50 x 12 mm

Flat bar steel 80 x 12 mm

without cross bar

total width in mm

450

750

1000

without cross bar			hot-dip galvanized	hot-dip galvanized and coated DB 703
total width in mm	FC	kg	part no.	part no.
450	В•	13.0	450-045	450-045B
750	В•	14.5	450-075	450-075B
1000	R•	16.0	450-100	450-100B



			a.p gaa	
total width in mm	FC	kg	part no.	part no.
450	В•	15.0	451-045	451-045B
750	В•	18.0	451-075	451-075B
1000	В•	20.5	451-100	451-100B

hot-dip galvanized



Flat bar steel 50 x 12 mm

with

without cross bar			hot-dip galvanized	hot-dip galvanized and coated DB 703
Total width	FC	kg	part no.	part no.
750	В•	14.5	4050-075	4050-075B
1000	В•	16.0	4050-100	4050-100B



cross bar			hot-dip galvanized	hot-dip galvanized and coated DB 703
Total width	FC	kg	part no.	part no.

18.0 4051-075

20.5 4051-100

4051-075B

4051-100B



Flat bar steel 80 x 12 mm

1000

without cross bar			hot-dip galvanized	hot-dip galvanized and coated DB 703
Total width	FC	kg	part no.	part no.
750	В•	23.0	4052-075	4052-075B
1000	В•	25.0	4052-100	4052-100B



with cross bar	hot-dip galvanized	hot-dip galvanized and coated DB 703

part no.

452-075

B• 21.0 452-045

B• 25.5 452-100

total width in mm	FC	kg	part no.	part no.
450	В•	24.5	453-045	453-045B
750	В•	29.0	453-075	453-075B
1000	В•	33.0	453-100	453-100B



vith cross bar		hot-dip galvanized	hot-dip galvanized and coated DB 703

Total width	FC	kg	part no.	part no.
750	В	29.0	4053-075	4053-075B
1000	В	33.0	4053-100	4053-100B

Also available with:

base plate 100 x 150 mm
(the total height changes to 800 mm

add the letter P to the part-no.

Lean-on hoop

made of steel tube for casting in concrete, hot-dip galvanized and optionally powder-coated in DB 703, total height: approx. 1200 mm, with joist made of flat steel 30 x 5 mm



Content

Flat steel 80 x 12 mm without cross bar, for casting in concrete

hot-dip galvanized and coated DB 703 hot-dip galvanized

total width in mm	FC	kg	part no.	part no.
450	В	21.0	4152-045	4152-045B
750	В	23.5	4152-075	4152-075B
1000	В	25.5	4152-100	4152-100B



Lean-on and barrier hoop steel tube Ø 48 x 2.5 mm, mitre welded

without cross bar, for casting in concrete

total width in mm	FC	kg	part no.	part no.
500	В•	8.0	447-09	447-09B
700	В•	8.5	447-11	447-11B
1000	В•	9.5	447-12	477-12B
1200	В•	10.0	447-13	447-13B




with cross bar, for casting in concrete

	hot-dip galvanized and
hot-dip galvanized	coated DB 703

hot-dip galvanized and coated DB 703

total width in mm	FC	kg	part no.	part no.
500	В•	9.0	447-19	447-19B
700	В•	10.0	447-21	447-21B
1000	В•	13.0	447-22	447-22B
1200	В•	14.0	447-23	447-23B



For increased flexibility: Suitable ground sockets for our bicycle leaning brackets allow for easy removal and reinsertion as needed

- 1. lean-on hoops for bicycles series 450/452/458
- 2. ground rosette
- **3.** ground socket with clamp
- 4. cover

Ground socket with locking mechanism for square tubes

for lean-on hoops of flat bar steel and square tube, total length: approx. 400 mm

hot-dip galvanized

	FC	kg	part no.
for 50 x 12 mm / 50 x 10 mm square tube	Α	3.4	450-41
for 80 x 12 mm / 80 x 10 mm square tube	Α	3.4	452-41
for 80 x 20 mm square tube	Α	3.4	458-41

Rosettes



Ground socket

			hot-dip galvanized	hot-dip galvanized and coated DB 703
total width	kg	FC	part no.	part no.
for 50 x 12 mm / 50 x 10 mm square tube	0.7	Α	450R	450RB
for 80 x 12 mm / 80 x 10 mm square tube	0.7	Α	452R	452RB
for 80 x 20 mm square tube	0.7	Α	458R	458RB

Cover caps



			hot-dip galvanized	hot-dip galvanized and coated DB 703
total width	kg	FC	part no.	part no.
for 50 x 12 mm / 50 x 10 mm square tube	1.2	Α	450-20	450-20B
for 80 x 12 mm / 80 x 10 mm square tube	1.2	Α	452-20	452-20B
for 80 x 20 mm square tube	1.2	Α	458-20	458-20B

Cargo-Bike lean-on hoop

for plugging down with swivelling holding devices to secure the bicycles (cargo bikes), with lasered logo, hot-dip galvanized, coated RAL 9005





length in mm	FC	kg	part no.
800	В	16.0	4021-20B


bollard luminaires allow squares and paths to be clearly defined, matching our large range of bollards, this robust bollard luminaire made of tubular steel is the perfect complement, to set highlights in the surroundings

Bollard light

tubular steel Ø 152 mm, total height 1000 mm, hot-dip galvanized, powder-coated, fixing: for plugging down, voltage: 230V AC 50Hz, power: 12W, light output: 1050 lm,

40156EBKS

color temperature: 4.000 K, light color: white, beam angle: 180°, protection class: IP 54

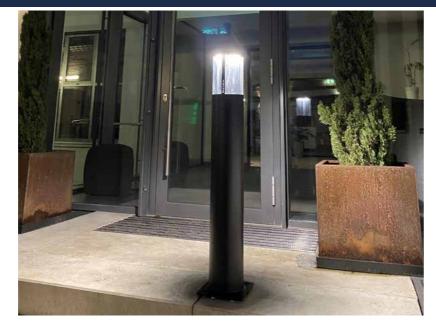



clear

			Sutili	cicai
Color	FC	kg	part no.	part no.
black structured	Α	16.0	40156EBMS	40156EBKS
rusty optic	Α	16.0	40156EBMR	40156EBKR
anthracite DB703	Α	16.0	40156EBMD	40156EBKD

satin



Laundry drying stands in different shapes





Laundry drying stand Y-shape made of steel tube Ø 60 mm,

cross tube with 8 round pins Ø 10 x 40 mm,

total width: 1500 mm total height: 2500 mm

	FC	kg	part no.	
with ground anchor. hot-dip galvanized	C•	18.5	419-400	



Laundry drying stand T-shape steel tube Ø 60 mm,

cross tube with 8 round pins Ø 10 x 40 mm,

total width: 1500 mm, t-connector, 2-part with bolt M10

total height: 2500 mm

	FC	kg	part no.
with ground anchor. hot-dip galvanized	С	14.0	419-450

Laundry drying stand

consisting of: 2 fixed posts with ground anchor, total height: 2500 mm, cross tube with welded, bent hooks, hot-dip galvanized, spacing approx. 500 mm, 2 T-connectors, 2-part with bolt M10, 2 plastic cap



			steel tube Ø 48 mm	steel tube Ø 60 mm
cross tube 2500 mm	FC	kg	part no.	part no.
5 hooks, one-sided	С	23.5	419-4425	419-4625
without hooks	С	22.0	419-4525	419-4725

steel tube Ø 48 mm steel tube Ø 60 mm cross tube 3000 mm FC kg part no. part no. 6 hooks, one-sided 26.0 419-4430 419-4630 С without hooks 23.5 419-4530 419-4730

steel tube Ø 48 mm ste&teel tube Ø 60 mm

-	Cross tube 3500 mm	[Ny	part no.	part no.
\	7 hooks, one-sided	С	27.5	419-4435	419-4635
	without hooks	С	25.0	419-4535	419-4735
				steel tube Ø 48 mm	steel tube Ø 60 mm
	cross tube 4000 mm	FC	kg	part no.	part no.

cross tube 4000 mm	FC	kg	part no.	part no.
8 hooks, one-sided	D	29.0	419-4440	419-4640
without hooks	D	26.5	419-4540	419-4740



extra charge for additional hooks	FC	part no.
each bent hook, pc.	Α	419-460

part no.

4027

4127

3.2

8.2



Litter bin oval

content approx. 45 I, complete with bracket and wrench, height approx. 600 mm, depth 260 mm, width 410 mm, lockable bottom flap for emptying, optional "nice guy" sticker

	FC	kg	part no.
hot-dip galvanized	A•	8.5	4029
fixed to post Ø 60 x 1300 mm	Α	13.5	4129
hot-dip galvanized and coated RAL 6005	Α	8.5	4029B
fixed to post Ø 60 x 1300 mm	Α	13.5	4129B

"Nice guy" sticker

	part no.
translucent / black	4021
translucent / white	4022
universal fastening tape (1 unit = 2 pieces) each bin requires 2 tapes, galvanized	4023

Litter bin approx. 35 I

with bracket and wrench, height 450 mm, Ø 320 mm

	FC	kg	part no.
hot-dip galvanized	A•	6.0	4030
fixed to post Ø 60 x 1300 mm	Α	9.5	4130
hot-dip galvanized and coated DB 703	Α	6.0	4030B
fixed to post Ø 60 x 1300 mm	Α	9.5	4130B

Litter bin approx. 40 I, with ashtray

including bracket and wrench, height approx. 530 mm, width 340 mm, depth 380 mm, two side openings, lockable bottom flap for emptying

	_		
	FC	kg	part no.
hot-dip galvanized	A•	9.0	4024
fixed to post Ø 60 x 1300 mm	Α	15.0	4124
hot-dip galvanized and coated DB 703	Α	9.0	4024B
fixed to post Ø 60 x 1300 mm	Α	15.0	4124B

Free-standing litter bin, approx. 50 l

with lid, Ø 360 mm, height 500 mm, with mounting post 60 x 60 x 1500 mm and triangular wrench

	FC	kg	part no.
hot-dip galvanized, without insert container	В•	18.0	4034
hot-dip galvanized. with insert container	В	21.2	4234
hot-dip galvanized and coated DB 703, without insert container	В	18.0	4034B
hot-dip galvanized and coated DB 703, with insert container	В	21.2	4234B

Inside container

for part-no. 4034, Ø 330 mm, height 440 mm

	FC	kg	part no.
hot-dip galvanized	Α•	3.2	4034E

Litter bins for fixing on walls or posts



bracket and square wrench part-no. 4037 FC hot-dip galvanized A• fixed to post Ø 60 x 1300 mm A

Square litter bin with cover

Litter bin, kidney shape

no perforation, content approx. 40 l, complete with brackets and wrench container size: 440 x 310 x 310 mm

	FC	kg	part no.
hot-dip galvanized	A•	15.0	4036
fixed to post Ø 60 x 1300 mm	Α	18.0	4136
hot-dip galvanized and coated RAL 6005	Α	15.0	4036B
fixed to post Ø 60 x 1300 mm	Α	18.0	4136B

wire, height approx. 430 mm, content approx. 27 l, Ø approx. 210 x 400 mm, complete with rail

Square litter bin with cover

no perforation. content approx. 40 I, including ashtray, complete with bracket and wrench, container size: 440 x 310 x 310 mm

	FC	kg	part no.
hot-dip galvanized	Α•	13.5	4035
fixed to post Ø 60 x 1300 mm	Α	18.0	4135
hot-dip galvanized and coated RAL 6005	Α	13.5	4035B
fixed to post Ø 60 x 1300 mm	Α	18.0	4135B

Round ashtray for fixing on walls or posts

with bracket, wrench and sticker, content approx. 4 I, Ø 200 mm, height 135 mm

	FC	kg	part no.
hot-dip galvanized with perforated bottom for water drainage	A•	3.0	4066
fixed to post Ø 60 x 1300 mm	Α	8.0	4166
hot-dip galvanized and coated DB 703	Α	3.0	4066B
fixed to post Ø 60 x 1300 mm	Α	8.0	4166B

Round ashtray with cover for fixing on walls or posts

with bracket, wrench and sticker, content approx. 4 I, Ø 200 mm, height 290 mm

	FC	kg	part no.
hot-dip galvanized with perforated bottom for water drainage		4.5	4067
fixed to post Ø 60 x 1300 mm	Α	9.5	4167
hot-dip galvanized and coated DB 703	Α	4.5	4067B
fixed to post Ø 60 x 1300 mm	Α	9.5	4167B

Triangular	socket	wrench,	
8 mm			

А	0.2	4038
FC	kg	part no.

Square wrench, 6 mm

Triangular wrench,

8 mm

	FC	kg	part no.	
for litter bin part-no. 4027	A•	0.2	4037	

182

Work site protection

Plant containers - for a green and attractive design of the cityscape

whether in front of buildings, in parking areas or along sidewalks - our plant containers add vibrant accents to urban spaces and create an inviting atmosphere

Planters

Planters

vertical round tubes Ø 76 mm. with side sheet steel and bottom plate hot-dip galvanized and coated DB 703, outside dimension: 880 x 880 mm, inside dimension: 700 x 700 mm, depth: 500 mm (container), height: with ball head 680 mm

vertical round tubes Ø 60 mm, horizontal steel tube 30 x 30 mm, with side sheet steel and bottom plate, hot-dip galvanized and coated DB 703, outside dimension: 640 x 640 mm, inside dimension: 520 x 520 mm, depth: 500 mm (container), height: with ball head 680 mm, with flat head 600 mm



	FC	kg	part no.
with ball head	В	55.0	4025-10B
with flat head	В	55.0	4025-20B



	FC	kg	part no.
with ball head	В	67.0	4025-70PB






Security for the company premises

Work site protection

From impact protection posts to access control – our site security program provides comprehensive protection for critical areas.



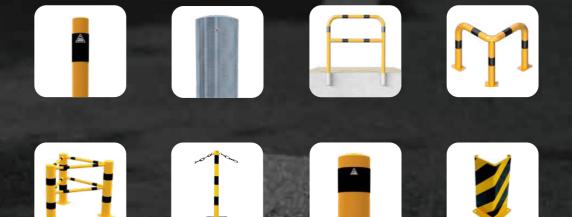

Barrier posts • Chain posts / accessories • Protective hoops • Protective railings • Crash guards • Warning and protection profiles Barrier posts steel tube Ø 60, Ø 76 mm

with welded steel cap, approx. 900 mm above ground, hot-dip galvanized and yellow coated with black stripes






Content

stationary for casting concrete

with ground anchor

	diameter in mm	FC	kg	part no.
hot-dip galvanized and coated yellow	Ø 60	Α•	4.9	460BG
with three black stripes	Ø 76	A•	7.0	476BG



stationary to be fixed by plugs with base plate 100 x 150 mm, total length: 900 mm

	diameter in mm	FC	kg	part no.
hot-dip galvanized and coated yellow	Ø 60	Α•	4.0	460PBG
with three black stripes	Ø 76	A•	5.1	476PBG



suitable fastening material for this product: set of mounting bolts type 1

part no.: 470-71

further accessories from page 55

Barrier posts

steel tube Ø 89, 70 x 70 mm with welded steel cap, approx. 900 mm above ground, hot-dip galvanized and yellow coated with black stripes






stationary for casting concrete

with ground anchor

	dimensions in mm	FC	kg	part no.
hot-dip galvanized and coated yellow	Ø 89	Α•	8.8	489BG
with three black stripes	70 x 70	A•	7.2	470BG



stationary to be fixed by plugs with base plate 100 x 150 mm, total length: 900 mm

	dimensions in mm	FC	kg	part no.
hot-dip galvanized and coated yellow	Ø 89	Α•	6.7	489PBG
with three black stripes	70 x 70	A•	5.6	470PBG



suitable fastening material for this product: set of mounting bolts type 1

part no.: 470-71
further accessories from page 55

also available in white / red, see barrier posts **pages 21**

color variants, reflection classes, and customization, see pages 6 - 7



Barrier posts

steel tube Ø 76, Ø 89, 70 x 70 mm with welded steel cap, approx. 1000 mm above ground, hot-dip galvanized and coated yellow, with black stripes



crash-proof - tiltable!





Content



statonary sides tiltable

with base plate 220 x 220 mm, for plugging down, without cover

	dimensions in mm	FC	kg	part no.
hot-dip galvanized and coated yellow with three black stripes	Ø 76	Α	8.9	476NPBG
	Ø 89	Α	10.2	489NPBG
	70 x 70	Α	9.5	470NPBG



Cover Ø 200 mm, for barrier post tiltable

part no. 477-10BG



suitable fastening material for this product: set of mounting bolts type 2

part no.: 470-72

further accessories from page 55

Barrier posts

steel tube Ø 76, Ø 89, 70 x 70 mm, with welded steel cap, approx. 1000 mm above ground, hot-dip galvanized and coated yellow, with black stripes

for more info scan the QR code







detachable removable, fixed by plugs

with base plate 150 x 180 mm, locked by hexagon socket screw

	dimensions in mm	FC	kg	part no.
	Ø 76	Α	6.8	476APBG
hot-dip galvanized and coated yellow with three black stripes	Ø 89	Α	8.0	489APBG
· ·	70 x 70	Α	7.2	470APBG



suitable fastening material for this product: set of mounting bolts type 1 part no.: 470-71

further accessories from page 55

40151HBG

40151FBG

40153NPBG

Sarrier posts

Steel tube bollards Ø 152 x 3.2 mm

40151BG

40153BG

Ø 152 x 3.2 mm with welded steel cap




Content

stationary for casting concrete

	total length in mm	FC	kg	part no.
	1200	Α•	13.3	40150
hot-dip galvanized	1500	В•	16.5	40151
	2000	В•	21.9	40152
	1200	A•	15.0	40150BG
hot-dip galvanized and coated yellow with three black stripes	1500	В•	16.5	40151BG
	2000	В•	21.9	40152BG

Removable caps for filling bollards with concrete

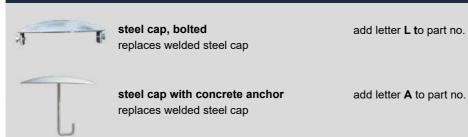

for plugging down with base plate 220 x 220 mm

	total length in mm	FC	kg	part no.
hot-dip galvanized	1000	Α•	13.9	40153
hot-dip galvanized and coated yellow with three black stripes	1000	Α•	13.9	40153BG



Steel tube bollards

 \emptyset 152 x 3,2 mm, with welded steel cap, including ground socket part no. 40151-10, approx. 500 mm above ground

removable without locking mechanism

		total length in mm	FC	kg	part no.
	hot-dip galvanized	1500	В	26.0	40151H
		2000	В	32.0	40152H
	hot-dip galvanized and coated yellow with three black stripes	1500	В	26.0	40151HBG
		2000	В	32.0	40152HBG

Steel tube bollards

Ø 152 x 3,2 mm, with welded steel cap, height above ground 1000 mm, incl. ground socket part no. 470-10, approx. 500 mm above ground

removable with triangular locking mechanism

	total length in mm	FC	kg	part no.
hot-dip galvanized	1500	В	20.1	40151F
hot-dip galvanized and coated yellow with three black stripes	1500	В	20.1	40151FBG

Flexible, tiltable steel tube bollards

Ø 152 x 3,2 mm, with welded steel cap

for plugging down with base plate 360 x 360 mm $\,$

	total length in mm	FC	kg	part no.
hot-dip galvanized	1000	Α	23.0	40153NP
hot-dip galvanized and coated yellow with three black stripes	1000	Α	23.0	40153NPBG



suitable fastening material for this product: set of mounting bolts type 2

part no.: 470-72

further accessories from page 55

These heavy bollards can be used as crash guard, particularly in front of entrances, halls, gas stations, etc. They can also protect roof overhangs or serve as guiding bollards in front of ramps, gates, etc.

Steel tube bollards

Ø 193 x 3.6 mm, with welded steel cap





40191BG



40193BG



Content

stationary for casting in concrete

	total length in mm	FC	kg	part no.
	1200	Α•	20.9	40190
hot-dip galvanized	1500	В•	26.0	40191
	2000	В•	34.4	40192
	1200	Α	20.9	40190BG
hot-dip galvanized and coated yellow three with black stripes	1500	В•	26.0	40191BG
	2000	В•	34.4	40192BG

Removable caps for filling bollards with concrete steel cap, bolted add letter L to part no. replaces welded steel cap steel cap with concrete anchor add letter A to part no. replaces welded steel cap

for plugging down with base plate 360 x 360 mm

	total length in mm	FC	kg	part no.
hot-dip galvanized	1000	A•	23.6	40193
hot-dip galvanized and coated yellow with three black stripes	1000	A•	23.6	40193BG



suitable fastening material for this product: set of mounting bolts type 2

part no.: 470-72

further accessories from page 55

Steel tube bollards removable for temporary detach



40191HBG

40191FBG



Steel tube bollards

Ø 193 x 3.6 mm, with welded steel cap, incl. ground socket part no. 40191-10 approx. 500 mm above ground

removable without locking mechanism


	total length in mm	FC	kg	part no.
hot-dip	1500	В	38.0	40191H
galvanized	2000	В	50.0	40192H
hot-dip galvanized and coated	1500	В	38.0	40191HBG
yellow with three black stripes	2000	В	50.5	40192HBG

Steel tube bollards

Ø 193 x 3.6 mm, with welded steel cap, height above ground: 1000 mm incl. ground socket part no. 470-10 approx. 500 mm above ground

removable with triangular locking mechanism

	total length in mm	FC	kg	part no.
hot-dip galvanized	1500	В	23.6	40191F
hot-dip galvanized and coated yellow with three black stripes	1500	В	23.6	40191FBG



Ornamental bollards

Steel tube bollards Ø 273 x 5.0 mm, with welded steel cap

40271

40273BG



stationary for casting in concrete


	total length in mm	FC	kg	part no.
hot-dip galvanized	1500	В	51.1	40271
	2000	В	67.6	40272
hot-dip galvanized and coated	1500	В	51.1	40271BG
yellow with three black stripes	2000	В	67.6	40272BG

Removable caps for filling bollards with concrete

steel cap with concrete anchor replaces welded steel cap

add letter **A** to the part no.

Content



	total length in mm	FC	kg	part no.
hot-dip galvanized	1500	В	58.9	40273
hot-dip galvanized and coated yellow with three black stripes	1500	В	58.9	40273BG

suitable fastening material for this product: set of mounting bolts type 2

part no.: 470-72

further accessories from page 55

These heavy bollards can be used as crash guard, particularly in front of entrances, halls, gas stations, etc.

They can also protect roof overhangs or serve as guiding bollards in front of ramps, gates, etc.

Steel tube bollards

40321BG

Ø 323 x 5.0 mm, with welded steel cap



stationary for casting in concrete

	total length in mm	FC	kg	part no.
	1500	В	60.0	40321
hot-dip galvanized	2000	В	80.5	40322
	2400	В	96.0	40324
	1500	В	60.0	40321BG
hot-dip galvanized and coated yellow with three black stripes	2000	В	80.5	40322BG
,	2400	В	96.0	40324BG




Removable caps for filling bollards with concrete

steel cap with concrete anchor replaces welded steel cap

add letter **A** to the part no.



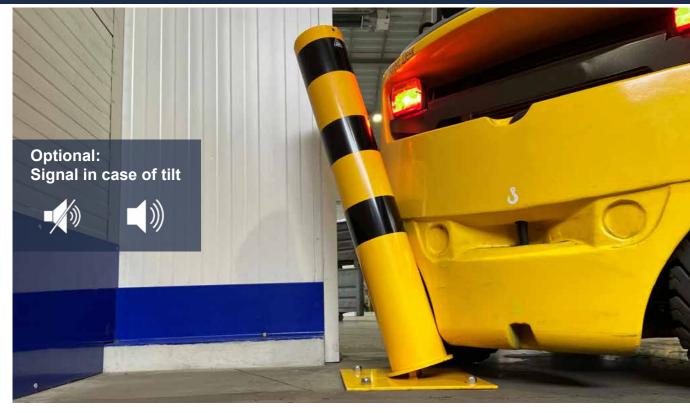


Steel tube bollards,

 \emptyset 152 x 3.2 mm, with welded steel cap,

total length: 1500 mm, stationary for plugging down

	signal	FC	kg	part no.
hot-dip galvanized	without signal	В	35.3	401530N
	with signal	В	35.5	401535SN
hot-dip galvanized and coated	without signal	В	35.3	401535NBG
yellow with three black stripes	with signal	В	35.5	401535SNBG





401530NBG



for more info scan the QR code

This tiltable bollard is designed for high impact loads and automatically returns to its original position when the load is removed.





Truck entry aid

angled made of Ø 152.4 mm round tube, total length: approx. 3000 mm, for plugging down

hot-dip galvanized

	FC	kg	part no.
left side	С	49.0	40157L
right side	С	49.0	40157R

hot-dip galvanized, and white coated with red reflecting stripes

	FC	kg	part no.
left side	С	49.0	40157LB
right side	С	49.0	40157RB

hot-dip galvanized and yellow coated with black stripes

	FC	kg	part no.
left side	С	49.0	40157LBG
right side	С	49.0	40157RBG

Truck entry aid

straight, can also be used as extension element made of Ø 152.4 mm round tube, total length: approx. 3600 mm, for plugging down



	FC	kg	part no.
hot-dip galvanized	С	54.0	40157G
	FC	kg	part no.
hot-dip galvanized, white coated, with red reflecting stripes	С	54.0	40157GB
	FC	kg	part no.
hot-dip galvanized and yellow coated with black stripes	С	54.0	40157GBG

Barrier chain of steel, unwelded

wire thickness 6 mm, packing unit 10 m

	FC	kg	part no.
hot-dip galvanized	Α•	6.0	430-66
galvanized und yellow / black coated	Α•	6.0	430-67B

Barrier chain of steel, unwelded

wire thickness 7 mm, packing unit 10 m

	FC	kg	part no.
hot-dip galvanized	Α•	9.0	430-10
galvanized und yellow / black coated	A•	9.0	430-20B

S-hook	FC	part no.
galvanized	A•	430-11
galvanized and yellow coated	A•	430-11BR
galvanized and black coated	A•	430-11BW
Connection link		part no.
galvanized	A•	430-09
galvanized and yellow coated	A•	430-09BR
galvanized and black coated	A•	430-09BW
Shackle		part no.
galvanized	A•	430-12
galvanized and yellow coated	A•	430-12BR
galvanized and black coated	A•	430-12BW

Plastic barrier chain,

packing unit 25 m

	FC	kg	part no.
6 mm, yellow / black	A•	2.0	430-06
8 mm, yellow / black	A•	2.5	430-30

Plastic connection link

	FC	part no.
yellow, 6 mm	Α•	430-07G
black, 6 mm	A•	430-07S
yellow, 8 mm	A•	430-16G
black, 8 mm	A•	430-16S

Plastic hook link

	FC	part no.
yellow, 6 mm	A•	430-08G
black, 6 mm	A•	430-08S
yellow, 8 mm	A•	430-17G
black, 8 mm	A•	430-17S

A	
	for further chains and accessories see pages 56 - 57





Movable chain post as temporary barrier, with high stability for quick setup, can be used outdoors or indoors. Post easy to separate from foot. Simple installation and space-saving

Chain post, heavy

of 60 mm round tube with welded steel cap and eyelets for attaching the chain, height 900 mm, with foot plate of recycled material 400 x 400 x 100 mm, removable

	FC	kg	part no.
hot-dip galvanized, yellow coated, with three black stripes	A•	15.0	460KBS

Plastic chain post

light-weight chain post of plastic material for quick installation, including triangular plastic foot, side length 300 mm, filled with concrete. Plastic tube Ø 40 mm, height 900 mm, with 4 chain holders integrated in the cap

	FC	kg	part no.
yellow / black	A•	3.0	4040KBS

Plastic chain post

with foot Ø 300 mm filled by customer, plastic tube Ø 40 mm, height 900 mm, with 4 chain, holders integrated in the cap

	FC	kg	part no.
yellow / black	A•	2.0	4041KBS



4041KBS

for indoor and outdoor use

Chain post set

version: 6 plastic posts Ø 40 mm, with 4 chain holders integrated in the cap, 10 m plastic chain, 10 connecting links

with concrete-filled triangular plastic feet, side length: 300 mm

	FC	kg	part no.
yellow / black	A•	20.0	4040KBSSET

with concrete-filled round plastic feet, Ø 300 mm

	FC	kg	part no.
yellow / black	A•	14.0	4041KBSSET



also available in red/white and in white / red, see barrier posts / barrier chains page 47

Safety and protection for danger areas (entrances, ramps, separations, etc.) hot-dip galvanized, powder coated yellow with black warning stripes.



Protective hoop with cross bar

round steel tube Ø 48 x 2.5 mm, height above ground: 1000 mm



for casting in concrete total height: 1400 mm

for plugging down

448-64BG

 total width in mm
 FC
 kg
 part no.
 part no.

 1000
 B
 12.5
 448-32BG
 448-62BG

 1500
 B
 15.5
 448-33BG
 448-63BG

18.5 448-34BG

Protective hoop with cross bar


2000

round steel tube Ø 60 x 2.5 mm, height above ground: 1000 mm



for casting in concrete total height: 1400 mm **for plugging down**

total width in mm	FC	kg	part no.	part no.
1000	В	15.5	465-32BG	465-62BG
1500	В	19.5	465-33BG	465-63BG
2000	В	23.0	465-34BG	465-64BG

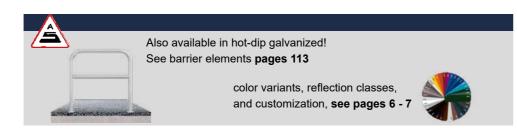

Safety protection especially for ramps

Protective hoop with cross bar

round steel tube Ø 48 x 2.5 mm, for wall-mounting, incl. 2 tube sockets type 443-15W, for pluggingg down, removable, without locking mechanism height above ground: 1000 mm



hot-dip galvanized

total width in mm	height above ground in mm	FC	kg	part no.
700	1200	Α•	12.0	448-21W
1000	1200	A•	13.8	448-22W
1200	1200	A•	14.9	448-23W



hot-dip galvanized and coated yellow with black stripes

total width in mm	height above ground in mm	FC	kg	part no.
700	1200	A•	12.0	448-21WBG
1000	1200	Α	13.8	448-22WBG
1200	1200	Α	14.9	448-23WBG

Protective hoop with cross bar

round steel tube Ø 60 x 2.5 mm, for wall-mounting, incl. 2 tube sockets type 460-15W for pluggingg down, removable, without locking mechanism, height above ground: 1000 mm



hot-dip galvanized

total width in mm	height above ground in mm	FC	kg	part no.
700	1200	В•	14.9	465-21W
1000	1200	В•	17.1	465-22W
1200	1200	В•	18.5	465-23W




hot-dip galvanized and coated yellow with black stripes

total width in mm	height above ground in mm	FC	kg	part no.
700	1200	В	14.9	465-21WBG
1000	1200	В	17.1	465-22WBG
1200	1200	В	18.5	465-23WBG

Effective protection for indoor and outdoor areas, warehouses and production halls. To secure work areas and traffic lanes, protect machines, columns and racks.

Anti-nudge hoop

steel tube Ø 76 mm, hot-dip galvanized, powdercoated yellow, with black warning stripes







total width in mm	height above ground in mm	FC	kg	part no.
400	250	Α	6.5	477-01BG
750	250	В	8.0	477-02BG
1000	250	Α	9.5	477-03BG
400	650	В	11.0	477-04BG
750	650	В	13.0	477-05BG
1000	650	В	14.0	477-06BG
400	1150	Α	14.5	477-07BG
750	1150	В	16.0	477-08BG
1000	1150	В	17.5	477-09BG



for plugging down

total width in mm	height above ground in mm	FC	kg	part no.
400	250	Α	4.0	477-01PBG
750	250	Α	6.0	477-02PBG
1000	250	Α	7.0	477-03PBG
400	650	Α	8.0	477-04PBG
750	650	В	10.0	477-05PBG
1000	650	В	11.0	477-06PBG
400	1150	Α	12.5	477-07PBG
750	1150	В	14.5	477-08PBG
1000	1150	В	15.5	477-09PBG

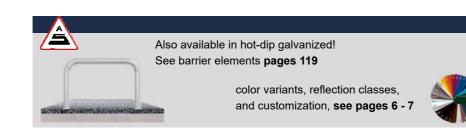



Anti-nudge hoop,

flexible, tiltable, steel tube Ø 76 mm, hoop with base plate 220 x 220 mm, hot-dip galvanized, powder-coated yellow, with black warning stripes



for plugging down



or plugging down				
total width in mm	height above ground in mm	FC	kg	part no.
400	650	Α	12.0	477-04NPBG
750	650	В	15.0	477-05NPBG
1000	650	В	17.0	477-06NPBG
400	1150	Α	12.0	477-07NPBG
750	1150	В	15.0	477-08NPBG
1000	1150	В	17.0	477-09NPBG

For temporary opening/closing of entrances. Locked with hexagon socket screws, the hoop can be detached from the plates and inserted as needed.

Anti-nudge hoop

flexible, tiltable Steel tube Ø 76 mm hot-dip galvanized, powder-coated yellow, with black warning stripes





for plugging down	>

total width in mm	height above ground in mm	FC	kg	part no.
400	650	Α	12.0	477-04APBG
750	650	В	15.0	477-05APBG
1000	650	В	17.0	477-06APBG
400	1150	Α	12.0	477-07APBG
750	1150	В	15.0	477-08APBG
1000	1150	В	17.0	477-09APBG

Anti-nudge hoop 90°

equal-sided, steel tube Ø 76 mm hot-dip galvanized and coated yellow, with black stripes



Content

for casting in concrete

total width in mm	height above ground in mm	FC	kg	part no.
350	650	В	19.0	477-30BG
350	1150	В	25.0	477-31BG
600	650	В	22.0	477-60BG
600	1150	В	27.5	477-61BG

for plugging down

total width in mm	height above ground in mm	FC	kg	part no.
350	650	В	13.5	477-30PBG
350	1150	В	21.0	477-31PBG
600	650	В	16.0	477-60PBG
600	1150	В	24.0	477-61PBG

Anti-nudge hoop

double hoop, steel tube Ø 76 mm, hot-dip galvanized and coated yellow with black stripes, total depth: 450 mm



for casting in concrete

total width in mm	height above ground in mm	FC	kg	part no.
750	650	В	28.5	477-68BG
750	1150	В	36.0	477-69BG
1000	650	В	30.0	477-70BG
1000	1150	В	37.5	477-71BG



for plugging down

total width in mm	height above ground in mm	FC	kg	part no.
750	650	В	21.0	477-68PBG
750	1150	В•	31.5	477-69PBG
1000	650	В	22.0	477-70PBG
1000	1150	В•	32.5	477-71PBG



Ø 76 mm, hot-dip galvanized and coated yellow, with black stripes, total depth: 350 mm



for casting in concrete, one side, right

total wid	th in mm	height above ground in mm	FC	kg	part no.
60	00	650	В	13.5	477-76BG
60	00	1150	В	17.0	477-77BG

for plugging down, one side, right

total width in mm	height above ground in mm	FC	kg	part no.
600	650	В	13.5	477-76PBG
600	1150	В	17.0	477-77PBG

for casting in concrete, one side, left

total width in mm	height above ground in mm	FC	kg	part no.
600	650	В	13.5	477-76BG
600	1150	В	17.0	477-77BG

for plugging down, one side, left

total width in mm	height above ground in mm	FC	kg	part no.
600	650	В	13.5	477-76PBG
600	1150	В	17.0	477-7BG



Anti-nudge hoop double-sided, deep version, steel tube Ø 76 mm, hot-dip galvanized and coated yellow with black stripes, total depth: 450 mm



for casting in concrete

total width in mm	height above ground in mm	FC	kg	part no.
750	650	В	17.0	477-72BG
1000	650	В	18.0	477-73BG
750	1150	В	20.0	477-74BG
1000	1150	В	21.0	477-75BG

for plugging down



total width in mm	height above ground in mm	FC	kg	part no.
750	650	В	13.0	477-72PBG
1000	650	В	14.0	477-73PBG
750	1150	В	18.0	477-74PBG
1000	1150	В	19.0	477-75PBG

Safety protection for posts, pillars, poles, etc.

Anti-nudge hoop for posts

steel tube construction with 2 hoops Ø 60 mm, with welded-on cross-bars for nesting, for plugging down, with base plates 100 x 150 mm, hot-dip galvanized, powdercoated yellow, with black warning stripes







Content

for plugging down

total width in mm	total depth in mm	height above ground in mm	FC	kg	part no.
600	600	650	В	19.0	465-066PBG
800	800	800	В	24.0	465-068PBG



Crash guard with underrun guard prevents underrunning of platform floor trucks

and protects from fork lift trucks



steel tube Ø 76 mm for pluggingg down, with base plates 100 x 150 mm, hot-dip galvanized, powder-coated yellow, with black warning stripes

for plugging down

Protection hoops

total width in mm	height above ground in mm	FC	kg	part no.
750	650	В	21.0	477-68PBG
750	1150	В	31.5	477-69PBG

Railing system for universal use, e.g. as internal protective railing to separate traffic aisles or protect terminal boxes, distribution panels, machines, etc. Assembly is easy as that: Put the parts together, plug


Protective railing

Protective railing

down, that's it!


steel tube Ø 48 mm,
variable connection, for plugging
down,base plate 100 x 150 mm,
height: 1000 mm, hot-dip galvanized,
powder-coated yellow, with black
warning stripes



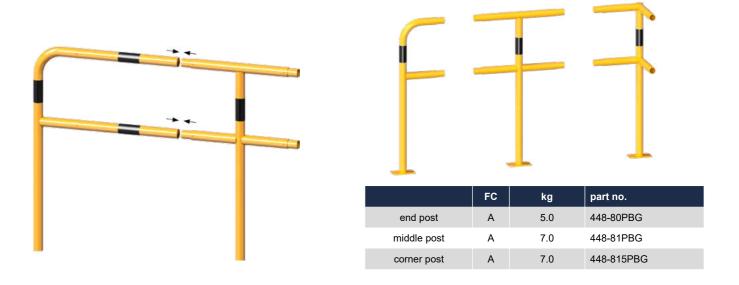



tube length in mm	center distance in mm	FC	kg	part no.
500	1000	Α	1.5	448-42BG
1000	1500	Α	3.0	448-43BG
1500	2000	В	4.5	448-44BG




Anti-nudge railing as safety railing for work ways in front of machines, robots, racks, etc. The railing system is available for plugging down with base plate, removable and tiltable up to 30°.



Protective railing

for plugging down, steel tube 70 x 70 mm, with top and height approx. 1000 mm, bolted

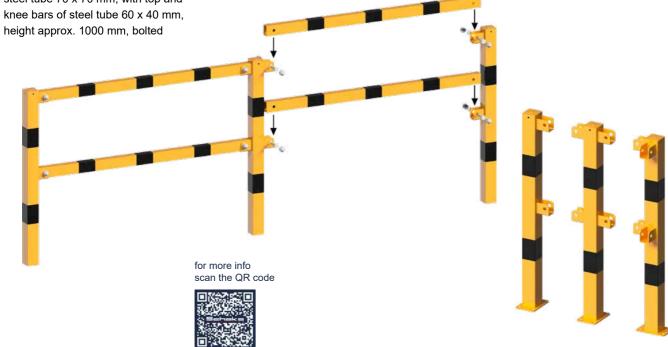

Fixed post

for plugging down, steel tube 70 x 70 mm, with base plate 100 x 150 mm

hot-dip galvanized and coated yellow with black stripes

	FC	kg	part no.
end post for top and knee bar	A•	6.5	4270PBG
middle post for top and knee bar	A•	7.0	4271PBG
corner post for top and knee bar 90°	A•	7.0	4273PBG

Cross bar

steel tube 60 x 40 mm, hot-dip galvanized, coated yellow with black warning stripes, incl. fastening bolts



Tube length in mm	FC	kg	part no.	
800	A•	3.0	4208BG	
1300	A•	5.0	4213BG	
1800	В•	7.0	4218BG	
2300	В•	8.5	4223BG	

Proctective railing, tiltable, elastic compensates impacts without being torn out of the floor

Protective railing

for plugging down, flexible, tiltable, with top and knee bars



steel tube 70 x 70 mm, with base plate 220 x 220 mm, hot-dip galvanized and coated yellow with black stripes, height above ground 1000 mm

	FC	kg	part no.
end post for top and knee bar	Α	9.5	4270NPBG
middle post for top and knee bar	Α	10.0	4271NPBG



Protective railing

for plugging down, removable for temporary opening of access routes

Fixed post

steel tube 70 x 70 mm, base plate for temporary opening 150 x 180 mm, hot-dip galvanized and coated yellow with black stripes,

height above ground: 1000 mm



	FC	kg	part no.
end post for top and knee bar	Α•	9.5	4270APBG
middle post for top and knee bar	Α•	10.0	4271APBG
corner post for top and knee bar 90°	Α•	10.0	4273APBG

Gate element

for insertion into standard posts, made of 60 x 40 mm steel tube, element size: 1300 mm, including fastening material







	FC	kg	part no.
with lift lock	A•	16.0	4225BG
lockable with profile cylinder	A•	16.0	4226BG
with return spring	A•	16.0	4227BG


Modular guardrail system





Maximum protection for your site

Our scuff board system offers reliable impact protection for buildings, machines, and traffic routes. It directs internal traffic, prevents damage from vehicles, and enhances safety in sensitive areas. Robust, durable, and flexible – providing more protection and less repair costs.

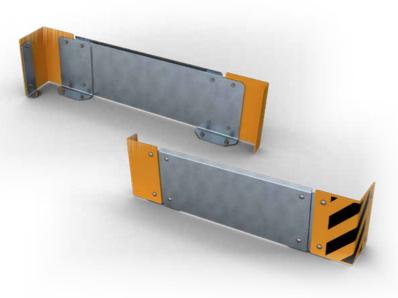

Center support


or guardrail system made of 10 mm sheet steel, hot-dip galvanized,

height: 400 mm, width: 250 mm, depth: 100 mm,

including fastening material.



total length in mm	FC	kg	part no.
250 mm	A•	9.1	477-440



of 10 mm sheet steel, hot-dip galvanized, height: 400 mm,

width: 90 mm, depth: 60 mm, including fastening material

total length in mm	FC	kg	part no.
250	A•	4.0	477-441

Guardrail

for guardrail system made of 6 mm sheet steel, hot-dip galvanized, straight design,

height: 400 mm,

for fastening to the support element, including fastening material.

total length in mm	center distance in mm	FC	kg	part no.	
480	500	A•	9.0	477-4405	
730	750	A•	13.8	477-4407	
980	1000	A•	18.4	477-4410	
1230	1250	A•	23.1	477-4412	
1480	1500	В•	27.8	477-4415	
1980	2000	В•	37.2	477-4420	

Corner protection angle

for guardrail system made of 6 mm sheet steel, hot-dip galvanized, yellow powder-coated with black stripes,

leg length: 240 mm, equal-sided 90°,

height: 400 mm, f or fastening to the support element,

including fastening material.



total length in mm	center distance in mm	FC	kg	part no.
240	240	Α•	8.8	477-442BG

End piece

for guardrail system made of 6 mm sheet steel, 90° bent, hot-dip galvanized, yellow coated,


height: 400 mm, leg length 1: 250 mm,

leg length 2: 100 mm, for fastening

to the support element, including fastening material.



total length in mm	center distance in mm	FC	kg	part no.
240	250	A•	6.4	477-443BG

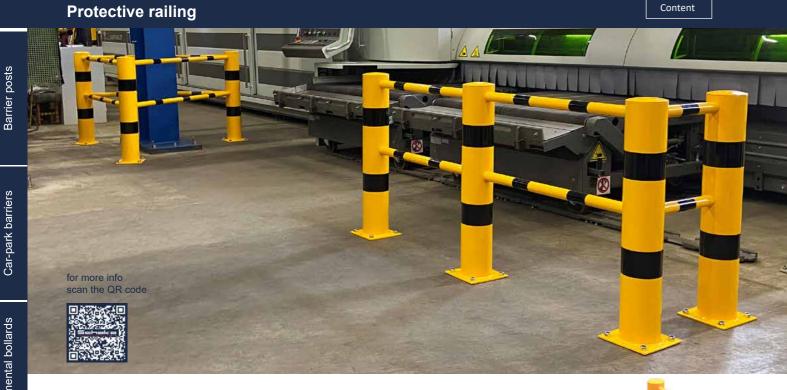

Plug-in railing system

steel tube Ø 152.4 mm with top and knee bars of steel tube Ø 48 mm, height approx. 1000 mm





	FC	kg	part no.
end post for top and knee bar	Α	13.0	40158-0BG
middle post for top and knee bar 180°	Α	13.0	40158-180BG
corner post for top and knee bar 90°	Α	13.0	40158-90BG
t-post 3 x 90°	Α	13.0	40158-3X90BG



	FC	kg	part no.
corner post for top and knee bar 60°	Α	13.0	40158-60BG

Cross bar

steel tube Ø 48 mm, hot-dip galvanized, coated yellow with black warning stripes, incl. fixing rods

tube length in mm	FC	kg	part no.
400 for distance 500	Α	3.0	448-45BG
900 for distance 1000	Α	5.0	448-46BG
1400 for distance 1500	Α	7.0	448-47BG

Crash guard

To protect shelves and storage racks. The new crash guard can be tilted 15°. This compensates impacts from fork trucks or other vehicles without damage or being torn out of the floor (up to 400Nm pressure).



for more info scan the QR code

Crash guard angle

acc. to BGR234, for individual use (warehouse equipment, rack or shelf supports, etc.)











Crash guard

flexible, steel plate 5 mm thick, yellow powder-coated with black stripes, for plugging down, height 400 mm, leg length 160 mm, tilting angle 15°

	FC	kg	part no.
for plugging down	Α	6.0	477-89BG

Crash guard angle

steel plate 5 mm thick, powder-coated yellow with black stripes (loose supply), for plugging down, leg length 160 mm



height in mm	FC	kg	part no.
200	A•	3.0	477-84B
400	A•	5.5	477-85B
800	A•	10.5	477-86B
1200	A•	15.5	477-87B

Crash guard angle

with reinforced edges of steel plate 6 mm thick, powder-coated yellow with attached black stripes, for plugging down, leg length 160 mm



height in mm	FC	kg	part no.
400	A•	7.0	477-90B
800	A•	14.0	477-96B
1200	A•	20.5	477-97B

Crash guard U-shape

with reinforced edges, made of 5 mm or 6 mm steel plate, powder-coated yellow with attached black stripes, for bolting down, leg length 160 mm, height 400 mm

	FC	kg	part no.
5 mm, without reinforced edges	A•	10,0	477-88B
6 mm, with reinforced edges	A•	8,2	477-91B



suitable fastening material for this product: set of mounting bolts type 1 part no. 470-71

Secures driveways, halls with a restricted height, underpasses etc.

Barrier

of aluminium tube, height: 100 mm, with protective caps, yellow coated with black stripes, incl. 2 x 1.00 m steel chain



Content

marking film one-sided

total length in mm	FC	kg	part no.
2000	В	3.5	4117-20BG
3000	С	5.0	4117-30BG
4000	D	6.0	4117-40BG
5000	D	7.0	4117-50BG
6000	D	8.5	4117-60BG

marking film both-sided

total length in mm	FC	kg	part no.
2000	В	3.5	4217-20BG
3000	С	5.0	4217-30BG
4000	D	6.0	4217-40BG
5000	D	7.0	4217-50BG
6000	D	8.5	4217-60BG

Clearly visible crash guard for posts, pillars, poles etc.

Crash guard angle

made of aluminium plate with 4 bores Ø 10 mm, for pluggingg down, height: 1000 mm, angular dimension: 120 mm yellow / black





FC	kg	part no.
A•	1.3	4317RBG
A•	1.3	4317LBG





steel angle 100 x 150 x 10 mm, for plugging down, with 45° miter, yellow powder coated, crash guard for fork trucks, platform floor trucks, etc. total height: 150 mm



total length in mm FC part no. kg 400 A• 7.0 477-44BG 800 14.0 477-45BG A٠ 1000 18.0 477-46BG 1200 22.0 477-47BG 1500 В• 28.0 477-48BG

Safety handles

Steel tube Ø 48 mm, for openings in walls and staircase areas



with fixing plates 100 x 150 mm, depth: 250 mm, hot-dip galvanized, powder-coated yellow with black warning stripes

total length in mm	FC	kg	part no.
1200	Α	5.5	477-801BG
2000	В	8.0	477-802BG





Articles are manufactured by order.

214

Secures transportation routes. Stops and protects.

Anti-nudge bar

round steel tube Ø 76 mm, for plugging down, with chamfered ends, base plates 200 x 50 x 10 mm, powder-coated yellow with black stripes, stops and protects height above ground 86 mm





total width in mm	FC	kg	part no.
400	Α•	3.5	477-40BG
800	В•	5.0	477-41BG
1000	В•	6.0	477-42BG
1200	В•	7.0	477-43BG

Corner - anti- nudge bar

round steel tube Ø 76 mm, for plugging down, base plates 200 x 50 x 10 mm, powder-coated yellow with black stripes, height above ground 86 mm



total width in mm	FC	kg	part no.
700 x 700	Α	8.5	477-50BG

Anti-nudge hoop

Round steel tube Ø 60 mm, for plugging down, base plates 100 x 150 mm, powder-coated yellow with black stripes, height above ground 115 mm



Marine Street		
		-
		The same of
		1

total length in mm	FC	kg	part no.
400	A•	3.0	4117-20BG
1000	В•	5.0	4117-30BG
1500	В•	7.0	4117-40BG
2000	В•	9.0	4117-50BG

Warning and protection profiles

fire test:

profile body: recycling-grade polyurethane foam, without CFC surface: firmly foamed, PU film dyed by counter pressure,

no external paint application

acrylate adhesive, adhesive force: 21 N/25 mm adhesive: from -40°C to +100°C for indoor and outdoor use temperature resistance:

DIN 4102 B2


All profiles delivered with strong adhesive tape (except type B). The flexible warning and protection profiles have a yellow / black warning pattern to warn of dangers at edges, projections and obstacles. At the same time they absorb impacts and thereby avoid injury and prevent damage due to run-up.

Warning and protection profiles yellow / black

1000 mm			5000 mm
article	part no.	FC	part no.
type A	4110	Α	4510
type B	4111	Α	4511
type C	4112	Α	4512
type D	4113	Α	4513
type E	4115	Α	4515
type F	4116	Α	4516
type G	4119	Α	4519
type H	4120	Α	4520
type R30	4117	Α	
type R50	4114	Α	

Corner protections for black warning and protection profiles

	FC	part no.
type A 2-dimensional	Α	410810
type A 3-dimensional	Α	410811
type E 2-dimensional	Α	410812
type E 3-dimensional	Α	410813

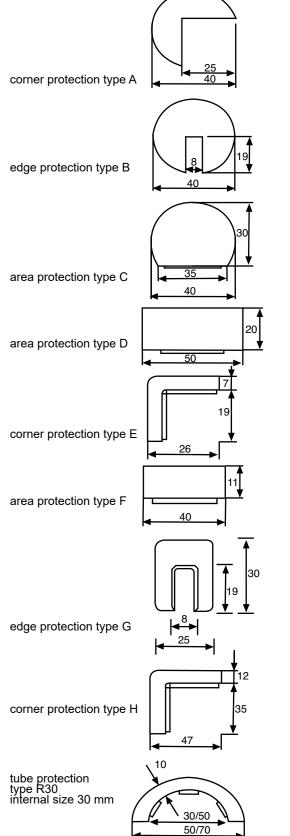

Successful product presentation for maximum success – we support you in perfect product staging!

To achieve the greatest success in marketing your products, an appealing presentation is essential. We not only provide professional data preparation and provision for your online and catalog presentations but also assist you in optimally designing your sales areas for showcasing our products.

With a selection of high-quality sample stands and presentation sets, we offer various options to effectively display our products. Additionally, we look forward to collaborating with you to develop creative ideas for the individual design of your sales areas. Rely on us – we are ready to realize your creative requirements and support you with our expertise.



Sample post type 4706

consisting of:

- **1. barrier post of steel tube Ø 76 mm** type 476PBG, stationary for pluggingg down
- 2. barrier post of steel tube 70 x 70 mm type 470UZB, foldable, with Euro profile cylinder
- **3. barrier post of steel tube 70 x 70 mm** type 470FUB, foldable, with triangular lock
- **4. Ornamental bollard with hemispherical head** type 482PB, stationary, for pluggingg down
- **5. Ornamental bollard with flat head Ø 76 mm** type 4071PB, stationary, for pluggingg down

6. Car-park barrier

type 4709UZB, foldable, with Euro profile cylinder lock to be fixed by plugs



Selling box 4707

consisting of:

3x barrier posts of steel tube 70 x 70 mm type 470FB, removable, with triangular lock

1x barrier post of steel tube 70 x 70 mm type 470FUHB, foldable, with triangular lock

1x barrier post of steel tube 70 x 70 mm type 470UZHB, foldable, with Euro profile cylinder

1 x barrier post of steel tube 70x 70 mm type 470B, stationary, for casting in concrete

3 x barrier posts of steel tube Ø 60 mm type 460B, stationary, for casting in concrete

3x barrier posts of steel tube Ø 60 mm type 460B/2, stationary, for casting in concrete, 2 eyelets

1 x car-park barrier

type 40771, foldable, with round cylinder



POS

First aid kit

consisting of:

15 x traffic cones, height 320 mm

20 x traffic cones, height 500 mm

4 x traffic cone adapter for all Schake traffic cones4 x signallight for traffic panels PowerNox, light exists on one side, yellow

4 x barrier strap with traffic cone adapter for all traffic cone types

24 x block battery 6V / 7AH 4R25

20 x barrier tape holder

50 x twin pole, diameter 16 mm, length: 1000 mm

4 x barrier tape, pinted on both sides, in red / white bocks, 500 m reel in special carton

4 x euro palllets

1 x Schake "EHK" pallets cover



Formwork-/ Trench shoring kit

consisting of:

2 x heads for formwork props, with corner angles

1 x head for formwork props, reinforced version, tube Ø 39 mm

1 x head for formwork props, with tube Ø 26.9 mm

1 x formwork beam of wood Schake type H20

1 x formwork prop hot-dip galvanized, with outer thread 1.70 m - 3.00 m

1 x formwork prop, painted, with inner thread 1.87 m - 3.00 m

1 x formwork prop hot-dip galvanized with outer thread 1.70 m - 3.00 m

1 x formwork prop painted, with outer thread

1 x tripod stand galvanized with square tube

1 x aluminium trench bridge, length: 1.70 m, width: 1.00 m

1 x trench shoring perfect 32 mm size 4

1 x trench shoring perfect 60 mm size 2

1 x trench shoring perfect 48 mm size 3

8 x wing nut, 3 arms

2 x threaded rod Ø 15 mm, outside dimension Ø 17 mm core domension 15 mm x 1900 mm

At the point of sale you have the possibility to adress to your customer in a very comprehensive way, take this opportunity with a good product presentation, always keeping the following POS benefits in mind:

Feel, not only inform

Your customers can touch the product and get a real impression of quality, size ratios and material properties. An impression that no digital presentation can provide in equal way

Experience and remember

Through direct, tangible contact with the product, the customer associates a real experience with the product and also stores it emotionally. You remain in your customer's memory for a long time.

· Stand out and be seen

By showing the product physically, you make it stand out from the crowd and draw the customer's attention to it. The customer's attention is drawn exactly to what you want to show

· Feel good and come back

Good product presentations with real products create a special atmosphere in your sales area.

Make sure that your customer feels comfortable, enjoys the time he spend looking at your products and gladly comes back.

Aluminium barrier	148
Aluminium bollard	93-95 iece 95
Aluminium corner / knee / cross p Aluminium style post	93-95
Ashtray	182-183
Barrier	131, 146-156
Barrier	131, 146-156
Barrier bar corten steel	110
Barrier bar flat steel	173, 176-179
Barrier bracket rectangular tube	110, 123-125, 165, 167, 174-175
Barrier bracket stainless steel	106-108
Barrier bracket steel Ø 48 mm	106-108, 112-113, 116-117, 164-165,
	171, 178, 200-201
Barrier bracket steel Ø 60 mm	114-115, 117, 171, 200-201
Barrier bracket steel Ø 76 mm	119, 202-205
Barrier chain stands	47, 56-57, 198-199
Barrier chains	56-57, 198
Barrier post made of steel tube Ø Barrier post made of tubular steel	
Barrier post made of tubular steel	•
Barrier post made of tubular steel	~ ·= ······
Zamer peet made et tazanar etter.	186. 199
Barrier post made of tubular steel	,
	102, 186, 188-189
Barrier post with LED light strip	133
Barrier posts made of steel tube &	Ø 60 mm 80-81
Barrier posts made of steel tube &	Ø 76 mm 82-84
Barrier posts made of tubular stee	el 100 x 100 mm 45, 97
Barrier posts made of tubular stee	el 70 x 70 mm 34-44, 46, 48, 50-51,
	96-98, 100, 187-189
Barrier posts made of tubular stee	
Barrier protection	134-135, 208-209, 212
Barrier railing	134-135, 208-209, 212
Barrier with support bracket	149-150
Bench	172
Bicycle / Scooter stand	158, 166-168
Bicycle leaning bracket - row systems	ems 158, 160-166, 168 arker 110, 167, 169-171, 173-178, 108
Bicycle leaning bracket, tubular st	
Bioyole learning bracket, tabalar of	116-117, 164-165, 171, 178
Bicycle leaning bracket, tubular st	
Black-Line posts	48-49
Blank plugs	61
Bollard lights	180
Bollard Ø 152 mm - Ø 323 mm	24-25, 30, 49, 92, 190-191, 196
Bollards made from recycled plass	tic 76
Border railing	144
Bracket for parking lot signage	74-75
Bracket rectangular tube	110, 123-125, 165, 167, 174-175
Bracket steel Ø 48 mm	106-108, 112-113, 116-117, 164-165,
D	171, 178, 200-201
Bracket steel Ø 60 mm	114-115, 117, 171, 200-201
Building and event protection	140-141 75
Bumper Cargo-Bike leaning bracket	75 179
Cargo-Bike leaning bracket Cast iron universal key	62
Chain links	57, 198
Chain stand	47, 56-57, 198-199
Charging column protection post	32-33
Charging pole protection	32-33, 120-121
Charging pole protection bracket	120-121
City fence	142-144
Collision protection	130, 213-214
Collision-proof barrier post	69
Column protection	32-33, 117-118, 120-121, 204-206
	154-155
Compact hand barrier	132
•	
Compact hand barrier Concrete speed bump Corner protection profile	213-217
Concrete speed bump Corner protection profile Corten steel bicycle leaning brack	tet 110
Concrete speed bump Corner protection profile Corten steel bicycle leaning brack Corten steel bollard	tet 110 109-110
Concrete speed bump Corner protection profile Corten steel bicycle leaning brack Corten steel bollard Corten steel bracket	tet 110 109-110 110
Concrete speed bump Corner protection profile Corten steel bicycle leaning brack Corten steel bollard Corten steel bracket Corten steel bump stop	tet 110 109-110 110 110
Concrete speed bump Corner protection profile Corten steel bicycle leaning brack Corten steel bollard Corten steel bracket	tet 110 109-110 110

Corten steel leaning bracket	110
Cover cap Deflector bracket steel Ø 48 mm	58-59 106-108, 112-113, 116-117, 164-165,
Democial Bracket steel 2 Te Timi	171, 178, 200-201
Design bike stand	163
Design flat steel bracket Door	172 141
Dowel set	55
Drive-through barrier	122-125
Drying rack E-bike - leaning bracket	181 161, 166-168
Edge protection	130, 213-214
Elastic tubular steel bollard	20, 30, 54, 196
Eyelet for barrier post	62
Fastening material Fence	55 136-139, 142-144
Fire department posts	16
Fixed road barrier	124-125
Fixing kit Flat steel bracket	55 173, 176-179
Flat steel bracket with internal edging	173
Flat steel bracket with wooden support	
Flat steel guard rail	173, 176-179
Flat steel impact protection bars Flat steel locking bar	173, 176-179 173, 176-179
Flexi post	30, 52-54, 196
Flexible bicycle stand	164
Flower container Foil for barrier posts	184 63
Fully retractable post	105
Galvanized sleeve	58-61
Garbage can	182-183 146
Gate barrier Gate element	210
Ground socket for posts	58-61
Hand barrier	131, 152-155
Hand barrier with gas pressure spring Hand barrier with gas pressure spring	
Height limiter	126-130
Impact protection	213-217
Impact protection bollard Ø 152 mm -	
Insert container	190-191, 196 182
Island bollard	64
Key	55, 62
KICKBACK Bollard Laundry drying rack	54 181
Laundry rack	181
Leaning and barrier bracket	106-109, 110, 112-117, 119, 200-203
Leaning bracket made of flat steel	173, 176-179
Leaning bracket rectangular tube Leaning bracket steel Ø 48 mm	110, 123-125, 165, 167, 174-175 106-108, 112-113, 116-117, 164-165,
3	171, 178, 200-201
LED bracket	133
Litter garbage can Litter garbage can	182-183 182-183
Locking post 100 x 100 mm	45, 97
Locking post 70 x 70 mm 34-4	4, 46, 48, 50-51, 96-98, 100, 187-189
Locking post Ø 102 mm	22, 88-89, 92, 103
Locking post Ø 108 mm Locking post Ø 152 mm	23, 93 24-25, 30, 49, 92, 190-191, 196
Locking post Ø 193 mm - Ø 323 mm	24-25, 30, 49, 92, 190-191, 196
Locking post Ø 42 mm	11
Locking post Ø 60 mm Locking post Ø 76 mm 17-20, 3	12-16, 47-51, 80-81, 101, 186, 199 2-33, 48-51, 82-84, 102, 186, 188-189
Locking post Ø 89 mm	21, 32, 49, 87, 103, 187-189
Mobile bollard	132
Mobile hand barrier	131
Parking and speed bump Parking bench	75 172
Parking lot barrier	66-73
Parking lot bracket	66-73
Parking lot sign posts	74 74 75
Parking lot sign posts	74-75

Parking lot signage	74
Parking threshold	75
Passage and parking lot ba	rrier 66-73
Path barrier	122-125
	eight and pendulum support 151
Path barrier with counterwe Paving stone edging	eight and support bracket 150 60
Planters	184
Plastic barrier post	52-53
Plastic chain	57, 198
Plastic chain stand	47, 56-57, 198-199
Plastic hook link	57, 198
Plastic post	52-53
Plastic post set Plug-in railing system	47, 56-57, 198-199 212
Plug-in triangular wrench	62
Post 100 x 100 mm	45, 97
Post 70 x 70 mm	34-44, 46, 48, 50-51, 96-98, 100, 187-189
Post chain	56-57, 198
Post Ø 102 mm	22, 88-89, 92, 103
Post Ø 108 mm Post Ø 152 mm	23, 93
Post Ø 42 mm	24-25, 30, 49, 92, 190-191, 196 11
Post Ø 60 mm	12-16, 47-51, 80-81, 101, 186, 199
	7-20, 32-33, 48-51, 82-84, 102, 186, 188-189
Post Ø 89 mm	21, 32, 49, 87, 103, 187-189
Post support	58-61
Protective corners	213, 216
Protective fence lattice	136-139
Protective profiles Railing	213-217 134-135, 208-209, 212
Rectangular litter garbage o	
Rectangular tube bollard	110, 123-125, 165, 167, 174-175
Rectangular tube bracket	165-167, 174-175
Rectangular tube crash bar	rier 110, 123-125, 165, 167, 174-175
Rectangular tube guard	110, 123-125, 165, 167, 174-175
Recycling post	76
Rotating gate barrier Rotating path barrier	146 122
Round ashtray	183
Round steel bracket Ø 48 n	nm 106-108, 112-113,
	116-117, 164-165, 171, 178, 200-201
Round steel bracket Ø 60 n	-, , ,
Round steel bracket Ø 76 r	,
Row parker Row system	158, 160-166, 168 158, 160-166, 168
Safety handles	215
Scooter parker	158, 168
Scraper board system	210-211
Scraper shelf	215
Screw set	55
Self-erecting post	52-54
Shackle S-hook	56, 198 56, 198
Signage for parking lots	74
Signal bollard	196
Single parker	159
Sleeves	58-61
Snap hook	56
Socket wrench	62
Speed bump	75
Square key Square post 100 x 100 mm	62 45, 97
Square post 70 x 70 mm	34-44, 46, 48, 50-51, 96-98, 100, 187-189
Stainless steel barrier	106-108
Stainless steel bicycle lean	ing bracket 106-108
Stainless steel bollard Ø 15	
Stainless steel bracket	106-108
Stainless steel bull bars	106-108
Stainless steel care spray Stainless steel guard rail	101 106-108
Stainless steel guard rail Stainless steel leaning brad	
Stainless steel locking bar	106-108
Stainless steel post 70 x 70) mm 100

Stainless steel post Ø 60 mm Stainless steel post Ø 76 mm		
Stainless steel post Ø 89 mm / Ø 102 mm		
Stainless steel tube bracket Ø 48 m		
Standard triangular key	62	
Standing ashtray	183	
Steel baffle Ø 60 mm		
Steel baffle Ø 76 mm	114-115, 117, 171, 200-201	
	119, 202-205	
Steel bollard Ø 76 mm	119, 202-205	
Steel bracket made of flat steel	173, 176-179	
Steel bracket Ø 48 mm	106-108, 112-113, 116-117, 164-165,	
	171, 178, 200-201	
Steel bracket Ø 60 mm	114-115, 117, 171, 200-201	
Steel bracket Ø 76 mm	119, 202-205	
Steel bracket rectangular tube	110, 123-125, 165, 167, 174-175	
Steel bull bar Ø 48 mm	106-108, 112-113, 116-117, 164-165,	
	171, 178, 200-201	
Steel chain	56, 198	
Steel guard Ø 48 mm	106-108, 112-113, 116-117, 164-165,	
•	171, 178, 200-201	
Steel guard Ø 60 mm	114-115, 117, 171, 200-201	
Steel guard Ø76 mm	119, 202-205	
Steel impact protection bar Ø 60 m		
Steel leaning bracket Ø 60 mm	-, , ,	
•	114-115, 117, 171, 200-201	
Steel leaning bracket Ø 76 mm	119, 202-205	
Steel tube bracket Ø 48 mm	106-108, 112-113, 116-117, 164-165,	
0.1.1 ((0.1.1.1.1.1.1.1.1.1.1.1.1.1.1.1.1.1.1.	171, 178, 200-201	
Sticker "Saubermännchen"	182	
Style bollard 100 x 100 mm made of tubular steel 9		
Style bollard 70 x 70 mm made of tubular steel 96-98		
Style bollard 80 x 80 mm made of tubular steel 9		
Style bollard made of corten steel tube 80 x 80 mm		
Style bollard made of steel tube Ø 89 mm		
Style bollard made of tubular steel 70 x 70 mm 96-		
Style bollard made of tubular steel Ø 102 mm 88-89, 9		
Style bollard made of tubular steel Ø 152 mm		
Style bollard made of tubular steel		
Style bollard made of tubular steel Ø 82 mm 85-86		
Style bollard made of tubular steel		
Style bollard made of tubular steel		
Swivel path barrier	123	
•		
Tree and pillar protection	117-118, 206	
Tree guards	117-118, 206	
Triangular key	62	
Tubular bracket rectangular tube	110, 123-125, 165, 167, 174-175	
Tubular bracket steel Ø 60 mm	114-115, 117, 171, 200-201	
Tubular bracket steel Ø 76 mm	119, 202-205	
Turnstile	140	
Universal bracket	117, 119	
Universal wrench	62	
U-profile bracket	110	
Warning and protection profiles	217	
Wheel stop	75	

Product liability:

Liability in accordance with the Product Liability Act does not apply if non-use of original parts. All products are supplied without decoration. Slight color deviations in printing due to the material properties of the single product are possible.

The products shown are reference samples.

Your requirements in daily business

You got a new idea and need some help?

You already have a final conception and you are looking for support?




We design the optimal product solution for you



We manufacture for you in our high-duty machine park



We will support you from the first idea to the finished product

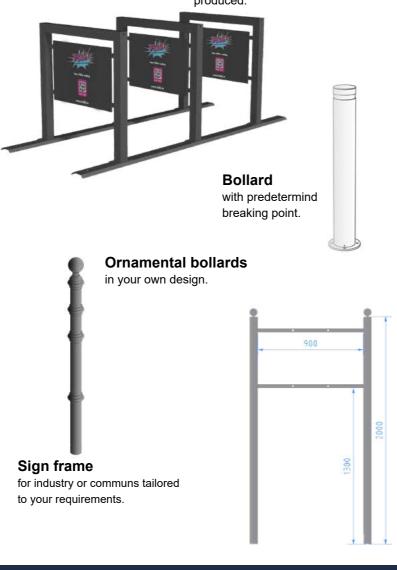



An overview of product solutions which we manufacture individually for you!

Bicycle leaning post

as advertising medium according to your specifications individually designed and

